



SVEUČILIŠTE U ZAGREBU - ŠUMARSKI FAKULTET
ZAVOD ZA ŠUMARSKJE TEHNIKE I TEHNOLOGIJE



Svetošimunska 25

10000 Zagreb

Projekt: Optimizacija sustava pridobivanja drva i šumske prometne infrastrukture na strateško-taktičkoj razini planiranja

KATALOG ŠUMSKIH STROJEVA



Motorne pile lančalice



Harvesterske glave



Harvesteri



Skideri



Forvarderi



Šumske žičare



Iverači

KATALOG MOTORNIH PILA LANČANICA



1. DOLMAR	1
2. EFCO	18
3. HUSQUARNA	28
4. JONSERED	45
5. MAKITA	56
6. OLEO-MAC	62
7. SOLO	72
8. STIHL	79

Dolmar PS32C

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	32	cm ³
Izlazna snaga	1,35	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,40	L
Zapremina rezervoara ulja	0,28	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,8/4,8	m/s ²
Razina zvučnog tlaka, LpA	102,6	dB(A)
Razina zvučne snage, LwA	111,5	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,1	kg
Duljina vodilice (kraća/dulja)	35-40	cm
Cijena	210	€
Namjena	Vrt i hobi	

Dolmar PS35C

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	35	cm ³
Izlazna snaga	2,35	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,40	L
Zapremina rezervoara ulja	0,29	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,9/5,0	m/s ²
Razina zvučnog tlaka, LpA	101,8	dB(A)
Razina zvučne snage, LwA	111,8	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,4	kg
Duljina vodilice (kraća/dulja)	35-40	cm
Cijena	300	€
Namjena	Vrt i hobi	

Dolmar PS222TH

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0

Fax: (02102) 1004-129

E-Mail: dolmar@makita.de

Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	22,5	cm ³
Izlazna snaga	0,74	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,20	L
Zapremina rezervoara ulja	0,19	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	6,0/5,0	m/s ²
Razina zvučnog tlaka, LpA	95	dB(A)
Razina zvučne snage, LwA	105,8	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	2,5	kg
Duljina vodilice (kraća/dulja)	25	cm
Cijena	329	€
Namjena	Jedno ili dvoručna	

Dolmar PS311TB

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	30,1	cm ³
Izlazna snaga	1,04	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,24	L
Zapremina rezervoara ulja	0,18	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) desna ručka	3,7	m/s ²
Razina zvučnog tlaka, LpA	97,0	dB(A)
Razina zvučne snage, LwA	108,0	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3,2	kg
Duljina vodilice (kraća/dulja)	25 / 30	cm
Cijena	335	€
Namjena	Jednoručna	

Dolmar 115

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	52	cm ³
Izlazna snaga	2,7	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,56	L
Zapremina rezervoara ulja	0,28	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	5,9 / 5,2	m/s ²
Razina zvučnog tlaka, LpA	100,6	dB(A)
Razina zvučne snage, LwA	112,0	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,1	kg
Duljina vodilice (kraća/dulja)	38 / 45	cm
Cijena	650	€
Namjena	Poluprofesionalna	

Dolmar PS352

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	25,2	cm ³
Izlazna snaga	1,7	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,31	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	3,3 / 3,4	m/s ²
Razina zvučnog tlaka, LpA	99,0	dB(A)
Razina zvučne snage, LwA	111,0	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,2	kg
Duljina vodilice (kraća/dulja)	35 / 40	cm
Cijena	400	€
Namjena	Vrt i hobi	

Dolmar PS350SC

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	34,7	cm ³
Izlazna snaga	1,7	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,48	L
Zapremina rezervoara ulja	0,28	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	4,3 / 3,6	m/s ²
Razina zvučnog tlaka, LpA	100,8	dB(A)
Razina zvučne snage, LwA	110,0	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Duljina vodilice (kraća/dulja)	35 / 40	cm
Cijena	330	€
Namjena	Vrt i hobi	

Dolmar PS420SC

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	42,4	cm ³
Izlazna snaga	2,2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,48	L
Zapremina rezervoara ulja	0,28	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	3,6 / 3,2	m/s ²
Razina zvučnog tlaka, LpA	100,8	dB(A)
Razina zvučne snage, LwA	111,8	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Duljina vodilice (kraća/dulja)	38 / 45	cm
Cijena	330	€
Namjena	Vrt i hobi	

Dolmar PS460

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0

Fax: (02102) 1004-129

E-Mail: dolmar@makita.de

Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	45,6	cm ³
Izlazna snaga	2,2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,47	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	4.1 / 3,6	m/s ²
Razina zvučnog tlaka, LpA	102,1	dB(A)
Razina zvučne snage, LwA	110,8	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,5	kg
Duljina vodilice (kraća/dulja)	38 / 38	cm
Cijena	370	€
Namjena	Vrt i hobi	

Dolmar PS500C

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0

Fax: (02102) 1004-129

E-Mail: dolmar@makita.de

Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	50	cm ³
Izlazna snaga	2,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,47	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	5,2 / 3,7	m/s ²
Razina zvučnog tlaka, LpA	102,4	dB(A)
Razina zvučne snage, LwA	111,3	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,6	kg
Duljina vodilice (kraća/dulja)	38 / 45	cm
Cijena	550	€
Namjena	Poluprofesionalna	

Dolmar PS4605

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de




Značajke motora		
Zapremina cilindra	45,6	cm ³
Izlazna snaga	2,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,47	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	5,2 / 3,7	m/s ²
Razina zvučnog tlaka, LpA	102,1	dB(A)
Razina zvučne snage, LwA	110,8	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,3	kg
Duljina vodilice (kraća/dulja)	38	cm
Cijena	550	€
Namjena	Poluprofesionalna	

Dolmar PS5105C

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de

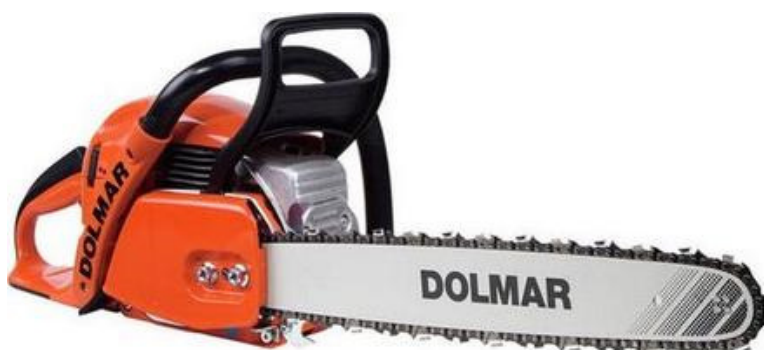

Značajke motora		
Zapremina cilindra	50	cm ³
Izlazna snaga	2,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,47	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	5,2 / 3,7	m/s ²
Razina zvučnog tlaka, LpA	102,4	dB(A)
Razina zvučne snage, LwA	111,3	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,4	kg
Duljina vodilice (kraća/dulja)	38 / 45	cm
Cijena	590	€
Namjena	Profesionalna	

Dolmar PS550

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



immex
Werkzeughandel

Značajke motora		
Zapremina cilindra	55,7	cm ³
Izlazna snaga	3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,6	L
Zapremina rezervoara ulja	0,3	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	6,3 / 6,3	m/s ²
Razina zvučnog tlaka, LpA	84,4	dB(A)
Razina zvučne snage, LwA	95,4	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,8	kg
Duljina vodilice (kraća/dulja)	38 / 45	cm
Cijena	690	€
Namjena	Profesionalna	

Dolmar PS6100

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	61	cm ³
Izlazna snaga	3,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,8	L
Zapremina rezervoara ulja	0,48	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	5,0 / 4,0	m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA	117	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,8	kg
Duljina vodilice (kraća/dulja)	38 / 45	cm
Cijena	736	€
Namjena	Profesionalna	

Dolmar PS7310

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	72,6	cm ³
Izlazna snaga	4,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,75	L
Zapremina rezervoara ulja	0,42	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	6,2 / 4,1	m/s ²
Razina zvučnog tlaka, LpA	105,1	dB(A)
Razina zvučne snage, LwA	115,3	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,6	kg
Duljina vodilice (kraća/dulja)	38 / 45 / 50	cm
Cijena	775	€
Namjena	Profesionalna	

Dolmar PS7910

Makita Werkzeug GmbH

Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail: dolmar@makita.de
Internet: www.dolmar.de



Značajke motora		
Zapremina cilindra	78,5	cm ³
Izlazna snaga	4,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,75	L
Zapremina rezervoara ulja	0,42	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	6,6 / 4,5	m/s ²
Razina zvučnog tlaka, LpA	105,1	dB(A)
Razina zvučne snage, LwA	115,3	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,6	kg
Duljina vodilice (kraća/dulja)	45 / 50 /60 /70	cm
Cijena	900	€
Namjena	Profesionalna	

Dolmar PS9010

Makita
Werkzeug GmbH
Makita-Platz 1
40885 Ratingen

Tel: (02102) 1004-0
Fax: (02102) 1004-129
E-Mail:
dolmar@makita.de
Internet:
www.dolmar.de



Značajke motora		
Zapremina cilindra	90	cm ³
Izlazna snaga	4,9	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	1,0	L
Zapremina rezervoara ulja	0,4	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) lijeva / desna ručka	7,0 / 6,2	m/s ²
Razina zvučnog tlaka, LpA	103,0	dB(A)
Razina zvučne snage, LwA	114,4	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	8,2	kg
Duljina vodilice (kraća/dulja)	50 /60 /74	cm
Cijena	975	€
Namjena	Profesionalna	

Efco MT 3500 S

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	38,9	cm ³
Izlazna snaga	1,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,35	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	6,0/6,7	m/s ²
Razina zvučnog tlaka, LpA	99,6	dB(A)
Razina zvučne snage, LwA	110,4	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,4	kg
Najveća duljina vodilice	35	cm
Cijena	180	€
Namjena	Vrt i hobi	

Efco MT 3700

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	35,2	cm ³
Izlazna snaga	1,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,32	L
Zapremina rezervoara ulja	0,22	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	6,0/6,7	m/s ²
Razina zvučnog tlaka, LpA	99,0	dB(A)
Razina zvučne snage, LwA	109,5	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,1	kg
Najveća duljina vodilice	41	cm
Cijena	359	€
Namjena	Poluprofesionalna	

Efco MT 4100 S

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	39	cm ³
Izlazna snaga	1,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,32	L
Zapremina rezervoara ulja	0,22	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,2/5,7	m/s ²
Razina zvučnog tlaka, LpA	99,5	dB(A)
Razina zvučne snage, LwA	110,5	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,2	kg
Najveća duljina vodilice	41	cm
Cijena	359	€
Namjena	Poluprofesionalna	

Efco MT 4400

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	42,9	cm ³
Izlazna snaga	2,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,32	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,4/7,1	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	112,3	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,3	kg
Najveća duljina vodilice	41	cm
Cijena	449	€
Namjena	Poluprofesionalna	

Efco MT 5200

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	51,7	cm ³
Izlazna snaga	2,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,32	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,2/5,9	m/s ²
Razina zvučnog tlaka, LpA	104,4	dB(A)
Razina zvučne snage, LwA	112,9	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,0	kg
Najveća duljina vodilice	46	cm
Cijena	599	€
Namjena	Poluprofesionalna	

Efco Modell 162

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	61,5	cm ³
Izlazna snaga	3,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,7	L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/7,0	m/s ²
Razina zvučnog tlaka, LpA	101	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,5	kg
Najveća duljina vodilice	51	cm
Cijena	849	€
Namjena	Profesionalna	

Efco MT 6500

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	63,4	cm ³
Izlazna snaga	3,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,8	L
Zapremina rezervoara ulja	0,45	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,3/5,3	m/s ²
Razina zvučnog tlaka, LpA	103,3	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,5	kg
Najveća duljina vodilice	71	cm
Cijena	699	€
Namjena	Profesionalna	

Efco MT 8200

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0

Telefax: +49 (0)711-510983-60

E-Mail: info@emak-deutschland.de

Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	80,7	cm ³
Izlazna snaga	4,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,8	L
Zapremina rezervoara ulja	0,45	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka		m/s ²
Razina zvučnog tlaka, LpA		dB(A)
Razina zvučne snage, LwA		dB(A)
Ostale značajke		
Masa (bez rezne opreme)	7,1	kg
Najveća duljina vodilice	76	cm
Cijena	999	€
Namjena	Profesionalna	

Efco MTT 2500

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	25,4	cm ³
Izlazna snaga	1,0	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,2	L
Zapremina rezervoara ulja	0,19	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,3/5,2	m/s ²
Razina zvučnog tlaka, LpA	97,7	dB(A)
Razina zvučne snage, LwA	107,9	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	2,7	kg
Najveća duljina vodilice	76	cm
Cijena	509	€
Namjena	Jedno-dvoručna	

Efco MTT 2500

Emak Deutschland GmbH

Max-Eyth-Str. 5
70736 Fellbach-Oeffingen
GERMANY

Telephone: +49 (0)711-510983-0
Telefax: +49 (0)711-510983-60
E-Mail: info@emak-deutschland.de
Internet: www.emak-deutschland.de



Značajke motora		
Zapremina cilindra	35,1	cm ³
Izlazna snaga	1,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,28	L
Zapremina rezervoara ulja	0,23	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,9/5,2	m/s ²
Razina zvučnog tlaka, LpA	97,7	dB(A)
Razina zvučne snage, LwA	107,9	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3,8	kg
Najveća duljina vodilice	76	cm
Cijena	549	€
Namjena	Jedno-dvoručna	

Husquarna 135

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	40,9	cm ³
Izlazna snaga	1,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,37	L
Zapremina rezervoara ulja	0,25	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,9/3,8	m/s ²
Razina zvučnog tlaka, LpA	102,6	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,4	kg
Najveća duljina vodilice	40	cm
Cijena	298	€
Namjena	Vrt i hobi	

Husquarna 435

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00
Telefax: +46 (0)8 738 94 50
E-Mail: info@drezga.hr
Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	40,9	cm ³
Izlazna snaga	1,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,37	L
Zapremina rezervoara ulja	0,25	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,8/4,2	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,2	kg
Najveća duljina vodilice	45	cm
Cijena	467	€
Namjena	Poluprofesionalna	

Husquarna 445

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	45,7	cm ³
Izlazna snaga	2,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,45	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,8/4,2	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Najveća duljina vodilice	50	cm
Cijena	597	€
Namjena	Poluprofesionalna	

Husquarna 440 e

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drežga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	40,9	cm ³
Izlazna snaga	1,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,45	L
Zapremina rezervoara ulja	0,25	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,8/4,2	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,4	kg
Najveća duljina vodilice	45	cm
Cijena	597	€
Namjena	Poluprofesionalna	

Husquarna 450 II

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	50,2	cm ³
Izlazna snaga	2,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,45	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,1/4,9	m/s ²
Razina zvučnog tlaka, LpA	104	dB(A)
Razina zvučne snage, LwA	115	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,1	kg
Najveća duljina vodilice	50	cm
Cijena	647	€
Namjena	Poluprofesionalna	

Husquarna 450 e

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	50,2	cm ³
Izlazna snaga	2,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,45	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,1/4,9	m/s ²
Razina zvučnog tlaka, LpA	104	dB(A)
Razina zvučne snage, LwA	115	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Najveća duljina vodilice	50	cm
Cijena	647	€
Namjena	Poluprofesionalna	

Husquarna 545

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	50,1	cm ³
Izlazna snaga	2,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,52	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnjaa ručka	3,8/3,7	m/s ²
Razina zvučnog tlaka, LpA	106	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Najveća duljina vodilice	50	cm
Cijena	599	€
Namjena	Poluprofesionalna	

Husquarna 555

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	59,8	cm ³
Izlazna snaga	3,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,65	L
Zapremina rezervoara ulja	0,33	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnjaa ručka	3,8/3,7	m/s ²
Razina zvučnog tlaka, LpA	106	dB(A)
Razina zvučne snage, LwA	118	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,9	kg
Najveća duljina vodilice	51	cm
Cijena	952	€
Namjena	Poluprofesionalna	

Husquarna 565

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezg.hr

Internet:

www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	70,6	cm ³
Izlazna snaga	3,7	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva		L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,2/5,3	m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA	119	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,5	kg
Najveća duljina vodilice	71	cm
Cijena	1122	€
Namjena	Poluprofesionalna	

Husquarna 543 XP

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738
90 00
Telefax: +46 (0)8 738 94
50
E-Mail: info@drežga.hr
Internet:
www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	43,1	cm ³
Izlazna snaga	2,2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,42	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,5/5,3	m/s ²
Razina zvučnog tlaka, LpA	101	dB(A)
Razina zvučne snage, LwA	113	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,5	kg
Najveća duljina vodilice	45	cm
Cijena	1122	€
Namjena	Profesionalna	

Husquarna 550 XP

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90 00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezga.hr

Internet: www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	50,1	cm ³
Izlazna snaga	2,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,42	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,8/3,7	m/s ²
Razina zvučnog tlaka, LpA	106	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Najveća duljina vodilice	50	cm
Cijena	967	€
Namjena	Profesionalna	

Husquarna 560 XP

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738
90 00

Telefax: +46 (0)8 738 94
50

E-Mail: info@drezga.hr

Internet:

www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	59,8	cm ³
Izlazna snaga	3,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,65	L
Zapremina rezervoara ulja	0,33	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,4/5,3	m/s ²
Razina zvučnog tlaka, LpA	106	dB(A)
Razina zvučne snage, LwA	118	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,9	kg
Najveća duljina vodilice	51	cm
Cijena	1182	€
Namjena	Profesionalna	

Husquarna 572 XP

Husquarna AB
(publ)
SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738
90 00
Telefax: +46 (0)8 738 94
50
E-Mail: info@drežga.hr
Internet:
www.husquarna.com/hr/



Značajke motora		
Zapremina cilindra	70,6	cm ³
Izlazna snaga	4,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,7	L
Zapremina rezervoara ulja	0,36	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/4,1	m/s ²
Razina zvučnog tlaka, LpA	107	dB(A)
Razina zvučne snage, LwA	120	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,6	kg
Najveća duljina vodilice	71	cm
Cijena	1382	€
Namjena	Profesionalna	

Husquarna 395 XP

Husquarna AB
(publ)
SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738
90 00
Telefax: +46 (0)8 738 94
50
E-Mail: info@drezga.hr
Internet:
www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	93,6	cm ³
Izlazna snaga	4,9	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,9	L
Zapremina rezervoara ulja	0,5	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	6,5/10,2	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	115	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	7,9	kg
Najveća duljina vodilice	90	cm
Cijena	1457	€
Namjena	Profesionalna	

Husquarna 572 XP G

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738
90 00

Telefax: +46 (0)8 738 94
50

E-Mail: info@drežga.hr

Internet:

www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	70,6	cm ³
Izlazna snaga	4,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva		L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/4,1	m/s ²
Razina zvučnog tlaka, LpA	107	dB(A)
Razina zvučne snage, LwA	120	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,8	kg
Najveća duljina vodilice	71	cm
Cijena	1432	€
Namjena	Profesionalna	

Husquarna T435

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738
90 00

Telefax: +46 (0)8 738 94
50

E-Mail: info@drezga.hr

Internet:

www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	35,2	cm ³
Izlazna snaga	1,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,26	L
Zapremina rezervoara ulja	0,17	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/4,1	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3,4	kg
Najveća duljina vodilice	35	cm
Cijena	598	€
Namjena	Jednoručno-dvoručna	

Husquarna T540 XP II

Husquarna AB (publ)

SE-103 92 Stockholm
Regeringsgatan 28
Sweden

Telephone: +46 (0)8 738 90
00

Telefax: +46 (0)8 738 94 50

E-Mail: info@drezg.hr

Internet:

www.husqvarna.com/hr/



Značajke motora		
Zapremina cilindra	37,7	cm ³
Izlazna snaga	1,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva		L
Zapremina rezervoara ulja	0,2	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,5,4,2	m/s ²
Razina zvučnog tlaka, LpA	104	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3,9	kg
Najveća duljina vodilice	40	cm
Cijena	728	€
Namjena	Jednoručno-dvoručna	

Jonsered 2234

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@drezga.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	38	cm ³
Izlazna snaga	1,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva		L
Zapremina rezervoara ulja		L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,7/4,8	m/s ²
Razina zvučnog tlaka, LpA	100	dB(A)
Razina zvučne snage, LwA	118	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,7	kg
Najveća duljina vodilice	35	cm
Cijena	229	€
Namjena	Vrt i hobi	

Jonsered CS 2240 S

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@dreza.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	40,9	cm ³
Izlazna snaga	1,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,37	L
Zapremina rezervoara ulja	0,25	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	2,9/4,3	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,4	kg
Najveća duljina vodilice	46	cm
Cijena	362	€
Namjena	Vrt i hobi	

Jonsered CS 2245 S

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@drežga.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	45,7	cm ³
Izlazna snaga	2,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,45	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	2,4/3,6	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	115	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,1	kg
Najveća duljina vodilice	45	cm
Cijena	418	€
Namjena	Vrt i hobi	

Jonsered CS 2250 S

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@drezga.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	50,2	cm ³
Izlazna snaga	2,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,45	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,4/3,6	m/s ²
Razina zvučnog tlaka, LpA	104	dB(A)
Razina zvučne snage, LwA	115	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,1	kg
Najveća duljina vodilice	45	cm
Cijena	493	€
Namjena	Vrt i hobi	

Jonsered CS 2255

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@drezga.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	55,5	cm ³
Izlazna snaga	2,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,44	L
Zapremina rezervoara ulja	0,32	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	2,8/3,4	m/s ²
Razina zvučnog tlaka, LpA	106	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,8	kg
Najveća duljina vodilice	50	cm
Cijena	528	€
Namjena	Vrt i hobi	

Jonsered CS 2125 T

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@drezga.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	25,4	cm ³
Izlazna snaga	0,96	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva		L
Zapremina rezervoara ulja	0,16	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,4/3,3	m/s ²
Razina zvučnog tlaka, LpA	95,7	dB(A)
Razina zvučne snage, LwA	110	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3	kg
Najveća duljina vodilice	25	cm
Cijena	356	€
Namjena	Jedno-dvoručna	

Jonsered CS 2253

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@dreza.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	50,1	cm ³
Izlazna snaga	2,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,52	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	2,5/2,7	m/s ²
Razina zvučnog tlaka, LpA	107	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5	kg
Najveća duljina vodilice	51	cm
Cijena	720	€
Namjena	Profesionalna	

Jonsered CS 2258

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@drezga.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	59,8	cm ³
Izlazna snaga	3,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,65	L
Zapremina rezervoara ulja	0,33	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	2,9/4,1	m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA	118	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,6	kg
Najveća duljina vodilice	50	cm
Cijena	625	€
Namjena	Profesionalna	

Jonsered CS 2260

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@dreza.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	59,8	cm ³
Izlazna snaga	3,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,65	L
Zapremina rezervoara ulja	0,33	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	2,9/4,1	m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA	118	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,6	kg
Najveća duljina vodilice	51	cm
Cijena	525	€
Namjena	Profesionalna	

Jonsered CS 2172

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@dreza.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	70,7	cm ³
Izlazna snaga	4,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,77	L
Zapremina rezervoara ulja	0,42	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,0/5,9	m/s ²
Razina zvučnog tlaka, LpA	110	dB(A)
Razina zvučne snage, LwA	119	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,4	kg
Najveća duljina vodilice	70	cm
Cijena	585	€
Namjena	Profesionalna	

Jonsered CS 2188

Jonsered

Zastupnik za RH: Pile&Vile
Obrtnička 2a, Rakitje
10437 Bestovje

Telephone: +385 01/3335-300
Telefax: +385 01/6445-466
E-Mail: pileivile@dreza.hr
Internet: www.jonsered.com/hr/



Značajke motora		
Zapremina cilindra	87,9	cm ³
Izlazna snaga	4,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,9	L
Zapremina rezervoara ulja	0,5	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,9/7,0	m/s ²
Razina zvučnog tlaka, LpA	106	dB(A)
Razina zvučne snage, LwA	119	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	7,1	kg
Najveća duljina vodilice	70	cm
Cijena	720	€
Namjena	Profesionalna	

Makita 231T

Makita Werkzeug GmbH

Makita Platz 1,
40885 Ratingen
Germany

Telephone: +49-(0)2102-1004-0

Telefax: +49-(0)2102-1004-129

E-Mail: info@solo-germany.com

Internet: <http://www.makita.de>



Značajke motora		
Zapremina cilindra	22,2	cm ³
Izlazna snaga	0,74	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,2	L
Zapremina rezervoara ulja	0,19	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka		m/s ²
Razina zvučnog tlaka, LpA		dB(A)
Razina zvučne snage, LwA		dB(A)
Ostale značajke		
Masa (bez rezne opreme)	2,5	kg
Najveća duljina vodilice		cm
Cijena	420	€
Namjena	Jedno-dvoručna	

Makita DCS341 TH

Makita Werkzeug GmbH

Makita Platz 1,
40885 Ratingen
Germany

Telephone: +49-(0)2102-1004-0

Telefax: +49-(0)2102-1004-129

E-Mail: info@solo-germany.com

Internet: <http://www.makita.de>



Značajke motora		
Zapremina cilindra	34	cm ³
Izlazna snaga	1,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,4	L
Zapremina rezervoara ulja	0,25	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka		m/s ²
Razina zvučnog tlaka, LpA		dB(A)
Razina zvučne snage, LwA		dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3,5	kg
Najveća duljina vodilice	40	cm
Cijena	340	€
Namjena	Jedno-dvoručna	

Makita DCS4630

Makita Werkzeug GmbH

Makita Platz 1,
40885 Ratingen
Germany

Telephone: +49-(0)2102-1004-0

Telefax: +49-(0)2102-1004-129

E-Mail: info@solo-germany.com

Internet: <http://www.makita.de>



Značajke motora		
Zapremina cilindra	45,6	cm ³
Izlazna snaga	2,2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,47	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka		m/s ²
Razina zvučnog tlaka, LpA		dB(A)
Razina zvučne snage, LwA		dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,5	kg
Najveća duljina vodilice	53	cm
Cijena	540	€
Namjena	Poluprofesionalna	

Makita DCS500

Makita Werkzeug GmbH

Makita Platz 1,
40885 Ratingen
Germany

Telephone: +49-(0)2102-1004-0

Telefax: +49-(0)2102-1004-129

E-Mail: info@solo-germany.com

Internet: <http://www.makita.de>



Značajke motora		
Zapremina cilindra	49,9	cm ³
Izlazna snaga	2,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,47	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka		m/s ²
Razina zvučnog tlaka, LpA		dB(A)
Razina zvučne snage, LwA		dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,5	kg
Najveća duljina vodilice	53	cm
Cijena	590	€
Namjena	Poluprofesionalna	

Makita DCS7301

Makita Werkzeug GmbH

Makita Platz 1,
40885 Ratingen
Germany

Telephone: +49-(0)2102-1004-0

Telefax: +49-(0)2102-1004-129

E-Mail: info@solo-germany.com

Internet: <http://www.makita.de>



Značajke motora		
Zapremina cilindra	72,6	cm ³
Izlazna snaga	4,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,72	L
Zapremina rezervoara ulja	0,4	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka		m/s ²
Razina zvučnog tlaka, LpA	101,4	dB(A)
Razina zvučne snage, LwA		dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,3	kg
Najveća duljina vodilice	71	cm
Cijena	874	€
Namjena	Profesionalna	

Makita DCS9010

Makita Werkzeug GmbH

Makita Platz 1,
40885 Ratingen
Germany

Telephone: +49-(0)2102-1004-0

Telefax: +49-(0)2102-1004-129

E-Mail: info@solo-germany.com

Internet: <http://www.makita.de>



Značajke motora		
Zapremina cilindra	90	cm ³
Izlazna snaga	4,9	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	1,0	L
Zapremina rezervoara ulja	0,4	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka		m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA		dB(A)
Ostale značajke		
Masa (bez rezne opreme)	8,2	kg
Najveća duljina vodilice	71	cm
Cijena	1230	€
Namjena	Profesionalna	

Oleo-Mac GS 350 C

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	38,9	cm ³
Izlazna snaga	1,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,36	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	6,0/6,7	m/s ²
Razina zvučnog tlaka, LpA	99,6	dB(A)
Razina zvučne snage, LwA	110,4	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,3	kg
Najveća duljina vodilice	35	cm
Cijena	180	€
Namjena	Vrt i hobi	

Oleo-Mac GS 410 C

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	39	cm ³
Izlazna snaga	1,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,32	L
Zapremina rezervoara ulja	0,22	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,2/5,7	m/s ²
Razina zvučnog tlaka, LpA	99,5	dB(A)
Razina zvučne snage, LwA	110,5	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,3	kg
Najveća duljina vodilice	41	cm
Cijena	288	€
Namjena	Vrt i hobi	

Oleo-Mac GST 250

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	25,4	cm ³
Izlazna snaga	1,0	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,22	L
Zapremina rezervoara ulja	0,19	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,3/5,2	m/s ²
Razina zvučnog tlaka, LpA	97,7	dB(A)
Razina zvučne snage, LwA	107,9	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	2,6	kg
Najveća duljina vodilice	25	cm
Cijena	319	€
Namjena	Jedno-dvoručna	

Oleo-Mac GS 440

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	42,9	cm ³
Izlazna snaga	2,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,32	L
Zapremina rezervoara ulja	0,26	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,3/5,2	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	113	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,5	kg
Najveća duljina vodilice	46	cm
Cijena	403	€
Namjena	Poluprofesionalna	

Oleo-Mac GS 947

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	45	cm ³
Izlazna snaga	2,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,5	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,5/6,0	m/s ²
Razina zvučnog tlaka, LpA	101	dB(A)
Razina zvučne snage, LwA	110,5	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,5	kg
Najveća duljina vodilice	46	cm
Cijena	446	€
Namjena	Poluprofesionalna	

Oleo-Mac GS 650

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	63,4	cm ³
Izlazna snaga	3,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,8	L
Zapremina rezervoara ulja	0,45	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,3/5,3	m/s ²
Razina zvučnog tlaka, LpA	103,3	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,5	kg
Najveća duljina vodilice	71	cm
Cijena	658	€
Namjena	Profesionalna	

Oleo-Mac 956

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	56,5	cm ³
Izlazna snaga	3,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,7	L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/7,0	m/s ²
Razina zvučnog tlaka, LpA	100	dB(A)
Razina zvučne snage, LwA	111	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,5	kg
Najveća duljina vodilice	51	cm
Cijena	681	€
Namjena	Profesionalna	

Oleo-Mac 962

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	61,5	cm ³
Izlazna snaga	3,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,7	L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/7,0	m/s ²
Razina zvučnog tlaka, LpA	101	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,6	kg
Najveća duljina vodilice	51	cm
Cijena	763	€
Namjena	Profesionalna	

Oleo-Mac GS 720

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	70,8	cm ³
Izlazna snaga	4,0	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,8	L
Zapremina rezervoara ulja	0,45	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	6,1/6,1	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	114,6	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,8	kg
Najveća duljina vodilice	76	cm
Cijena	932	€
Namjena	Profesionalna	

Oleo-Mac GS 720

Oleo-Mac

Via E. Fermi, 4
42011 Bagnolo in Piano (Reggio
Emilia)
ITALY

Telephone: +49-(0)2102-1004-0
Telefax: +49-(0)2102-1004-129
E-Mail: venditeitalia@oleomac.it
Internet: www.oleomac.it



Značajke motora		
Zapremina cilindra	70,8	cm ³
Izlazna snaga	4,0	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,8	L
Zapremina rezervoara ulja	0,45	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	6,1/6,1	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	114,6	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,8	kg
Najveća duljina vodilice	76	cm
Cijena	932	€
Namjena	Profesionalna	

Solo 643

SOLO Kleinmotoren GmbH

Stuttgarter Straße 41
D-71069 Sindelfingen-
Maichingen
Germany



Telephone: +49 (0)7031 - 301 - 0
Telefax: +49 (0)7031 - 301- 149
E-Mail: info@solo-germany.com
Internet: www.solo-germany.com/

Značajke motora		
Zapremina cilindra	40,2	cm ³
Izlazna snaga	2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,41	L
Zapremina rezervoara ulja	0,21	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,6/7,4	m/s ²
Razina zvučnog tlaka, LpA	96	dB(A)
Razina zvučne snage, LwA	110	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,1	kg
Najveća duljina vodilice	30	cm
Cijena	371	€
Namjena	Vrt i hobi	

Solo 645

SOLO Kleinmotoren GmbH

Stuttgarter Straße 41
D-71069 Sindelfingen-
Maichingen
Germany



Telephone: +49 (0)7031 - 301 - 0
Telefax: +49 (0)7031 - 301- 149
E-Mail: info@solo-germany.com
Internet: www.solo-germany.com/

Značajke motora		
Zapremina cilindra	40,2	cm ³
Izlazna snaga	2,2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,5	L
Zapremina rezervoara ulja	0,39	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,75/8,17	m/s ²
Razina zvučnog tlaka, LpA	101	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,5	kg
Najveća duljina vodilice	38	cm
Cijena	371	€
Namjena	Vrt i hobi	

Solo 644

SOLO Kleinmotoren GmbH

Stuttgarter Straße 41
D-71069 Sindelfingen-
Maichingen
Germany

Telephone: +49 (0)7031 - 301 - 0
Telefax: +49 (0)7031 - 301- 149
E-Mail: info@solo-germany.com
Internet: www.solo-germany.com/



Značajke motora		
Zapremina cilindra	44	cm ³
Izlazna snaga	2,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,5	L
Zapremina rezervoara ulja	0,39	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,9/10,7	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Najveća duljina vodilice	46	cm
Cijena	566	€
Namjena	Profesionalna	

Solo 651

SOLO Kleinmotoren GmbH

Stuttgarter Straße 41
D-71069 Sindelfingen-
Maichingen
Germany

Telephone: +49 (0)7031 - 301 - 0
Telefax: +49 (0)7031 - 301- 149
E-Mail: info@solo-germany.com
Internet: www.solo-germany.com/



Značajke motora		
Zapremina cilindra	51	cm ³
Izlazna snaga	2,94	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,6	L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/10	m/s ²
Razina zvučnog tlaka, LpA	102	dB(A)
Razina zvučne snage, LwA	113	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Najveća duljina vodilice	46	cm
Cijena	630	€
Namjena	Profesionalna	

Solo 665

SOLO Kleinmotoren GmbH

Stuttgarter Straße 41
D-71069 Sindelfingen-
Maichingen
Germany

Telephone: +49 (0)7031 - 301 - 0
Telefax: +49 (0)7031 - 301- 149
E-Mail: info@solo-germany.com
Internet: www.solo-germany.com/



Značajke motora		
Zapremina cilindra	65,9	cm ³
Izlazna snaga	3,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,75	L
Zapremina rezervoara ulja	0,42	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,0/4,37	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,7	kg
Najveća duljina vodilice	40	cm
Cijena	727	€
Namjena	Profesionalna	

Solo 675

SOLO Kleinmotoren GmbH

Stuttgarter Straße 41
D-71069 Sindelfingen-
Maichingen
Germany

Telephone: +49 (0)7031 - 301 - 0
Telefax: +49 (0)7031 - 301- 149
E-Mail: info@solo-germany.com
Internet: www.solo-germany.com/



Značajke motora		
Zapremina cilindra	74,6	cm ³
Izlazna snaga	4,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,75	L
Zapremina rezervoara ulja	0,42	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,85/4,75	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,65	kg
Najveća duljina vodilice	45	cm
Cijena	792	€
Namjena	Profesionalna	

Solo 681

SOLO Kleinmotoren GmbH

Stuttgarter Straße 41
D-71069 Sindelfingen-
Maichingen
Germany

Telephone: +49 (0)7031 - 301 - 0
Telefax: +49 (0)7031 - 301- 149
E-Mail: info@solo-germany.com
Internet: www.solo-germany.com/



Značajke motora		
Zapremina cilindra	80,7	cm ³
Izlazna snaga	4,7	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,75	L
Zapremina rezervoara ulja	0,42	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,33/5,4	m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,6	kg
Najveća duljina vodilice	50	cm
Cijena	845	€
Namjena	Profesionalna	

Stihl MS 150 C-E

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	23,6	cm ³
Izlazna snaga	1,0	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,2	L
Zapremina rezervoara ulja	0,15	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,9/4,9	m/s ²
Razina zvučnog tlaka, LpA	97	dB(A)
Razina zvučne snage, LwA	110	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	2,8	kg
Duljina vodilice (kraća/dulja)	25-35	cm
Cijena	529	€
Namjena	Vrt i hobi	

Stihl MS 170

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	30,1	cm ³
Izlazna snaga	1,2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,25	L
Zapremina rezervoara ulja	0,145	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	5,2/5,5	m/s ²
Razina zvučnog tlaka, LpA	100	dB(A)
Razina zvučne snage, LwA	111	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,1	kg
Duljina vodilice (kraća/dulja)	30	cm
Cijena	239	€
Namjena	Vrt i hobi	

Stihl MS 181

STIHL
Vertriebszentrale AG &
Co. KG
 Robert-Bosch-Str. 13
 64807 Dieburg
 Germany

Tel.: 06071 30 55 358
 Fax: 06071 30 55 438
 E-Mail: kundenservice@stihl.de
 Internet: www.stihl.de
 Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	31,8	cm ³
Izlazna snaga	1,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,25	L
Zapremina rezervoara ulja	0,145	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	6,6/7,8	m/s ²
Razina zvučnog tlaka, LpA	100	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,3	kg
Duljina vodilice (kraća/dulja)	30 / 35	cm
Cijena	349	€
Namjena	Vrt i hobi	

Stihl MS 193 C-E

STIHL
Vertriebszentrale AG &
Co. KG
 Robert-Bosch-Str. 13
 64807 Dieburg
 Germany

Tel.: 06071 30 55 358
 Fax: 06071 30 55 438
 E-Mail: kundenservice@stihl.de
 Internet: www.stihl.de
 Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	30,1	cm ³
Izlazna snaga	1,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,27	L
Zapremina rezervoara ulja	0,22	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,7/3,7	m/s ²
Razina zvučnog tlaka, LpA	101	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3,6	kg
Duljina vodilice (kraća/dulja)	30 / 35	cm
Cijena	509	€
Namjena	Vrt i hobi	

Stihl MS 211

STIHL
Vertriebszentrale AG &
Co. KG

Robert-Bosch-Str. 13
64807 Dieburg
Germany

Tel.: 06071 30 55 358
Fax: 06071 30 55 438
E-Mail: kundenservice@stihl.de
Internet: www.stihl.de
Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	35,2	cm ³
Izlazna snaga	1,7	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,27	L
Zapremina rezervoara ulja	0,265	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,5/3,5	m/s ²
Razina zvučnog tlaka, LpA	100	dB(A)
Razina zvučne snage, LwA	113	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,3	kg
Duljina vodilice (kraća/dulja)	30 / 35	cm
Cijena	399	€
Namjena	Vrt i hobi	

Stihl MS 231

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	42,6	cm ³
Izlazna snaga	2,0	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,39	L
Zapremina rezervoara ulja	0,20	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,9/3,9	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,3	kg
Duljina vodilice (kraća/dulja)	30 / 35	cm
Cijena	479	€
Namjena	Vrt i hobi	

Stihl MS 251

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	45,6	cm ³
Izlazna snaga	2,2	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,39	L
Zapremina rezervoara ulja	0,20	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,9/3,9	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	114	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,8	kg
Duljina vodilice (kraća/dulja)	35 / 40	cm
Cijena	549	€
Namjena	Vrt i hobi	

Stihl MS 271

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	50,2	cm ³
Izlazna snaga	2,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,5	L
Zapremina rezervoara ulja	0,24	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,5/4,5	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	115	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,6	kg
Duljina vodilice (kraća/dulja)	32 / 37 / 40	cm
Cijena	599	€
Namjena	Poluprofesionalna	

Stihl MS 291

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	50,2	cm ³
Izlazna snaga	2,6	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,50	L
Zapremina rezervoara ulja	0,24	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,5/4,5	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,6	kg
Duljina vodilice (kraća/dulja)	37 / 40 / 45	cm
Cijena	679	€
Namjena	Poluprofesionalna	

Stihl MS 311

STIHL
Vertriebszentrale AG &
Co. KG
 Robert-Bosch-Str. 13
 64807 Dieburg
 Germany

Tel.: 06071 30 55 358
 Fax: 06071 30 55 438
 E-Mail: kundenservice@stihl.de
 Internet: www.stihl.de
 Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	59	cm ³
Izlazna snaga	3,1	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,60	L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,0/4,0	m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA	117	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,2	kg
Duljina vodilice (kraća/dulja)	37 / 40 / 45	cm
Cijena	789	€
Namjena	Poluprofesionalna	

Stihl MS 391

STIHL
Vertriebszentrale AG &
Co. KG
 Robert-Bosch-Str. 13
 64807 Dieburg
 Germany

Tel.: 06071 30 55 358
 Fax: 06071 30 55 438
 E-Mail: kundenservice@stihl.de
 Internet: www.stihl.de
 Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	64,1	cm ³
Izlazna snaga	3,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,60	L
Zapremina rezervoara ulja	0,35	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,0/4,0	m/s ²
Razina zvučnog tlaka, LpA	105	dB(A)
Razina zvučne snage, LwA	117	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,2	kg
Duljina vodilice (kraća/dulja)	37 / 40 / 45	cm
Cijena	869	€
Namjena	Poluprofesionalna	

Stihl MS 201 C-M

STIHL
Vertriebszentrale AG &
Co. KG
 Robert-Bosch-Str. 13
 64807 Dieburg
 Germany

Tel.: 06071 30 55 358
 Fax: 06071 30 55 438
 E-Mail: kundenservice@stihl.de
 Internet: www.stihl.de
 Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	35,2	cm ³
Izlazna snaga	1,8	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,31	L
Zapremina rezervoara ulja	0,22	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,3/3,3	m/s ²
Razina zvučnog tlaka, LpA	99	dB(A)
Razina zvučne snage, LwA	112	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	3,9	kg
Duljina vodilice (kraća/dulja)	30 / 35 / 40	cm
Cijena	829	€
Namjena	Profesionalna	

Stihl MS 241 C-M

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	42,6	cm ³
Izlazna snaga	2,3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,39	L
Zapremina rezervoara ulja	0,25	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	2,9/2,9	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	115	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,5	kg
Duljina vodilice (kraća/dulja)	35 / 40 / 45	cm
Cijena	849	€
Namjena	Profesionalna	

Stihl MS 261 C-M

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	50,2	cm ³
Izlazna snaga	3	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,5	L
Zapremina rezervoara ulja	0,27	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,5/3,5	m/s ²
Razina zvučnog tlaka, LpA	104	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	4,9	kg
Duljina vodilice (kraća/dulja)	32 / 37 / 40 / 45	cm
Cijena	969	€
Namjena	Profesionalna	

Stihl MS 362 C-M

STIHL
Vertriebszentrale AG &
Co. KG
 Robert-Bosch-Str. 13
 64807 Dieburg
 Germany

Tel.: 06071 30 55 358
 Fax: 06071 30 55 438
 E-Mail: kundenservice@stihl.de
 Internet: www.stihl.de
 Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	59	cm ³
Izlazna snaga	3,5	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,6	L
Zapremina rezervoara ulja	0,325	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	3,5/3,5	m/s ²
Razina zvučnog tlaka, LpA	106	dB(A)
Razina zvučne snage, LwA	117	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	5,6	kg
Duljina vodilice (kraća/dulja)	37 / 40 / 45 / 50	cm
Cijena	1177	€
Namjena	Profesionalna	

Stihl MS 462 C-M

STIHL
Vertriebszentrale AG &
Co. KG
 Robert-Bosch-Str. 13
 64807 Dieburg
 Germany



Tel.: 06071 30 55 358
 Fax: 06071 30 55 438
 E-Mail: kundenservice@stihl.de
 Internet: www.stihl.de
 Internet: www.viking-garten.de

Značajke motora		
Zapremina cilindra	72,2	cm ³
Izlazna snaga	4,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	0,72	L
Zapremina rezervoara ulja	0,34	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	4,8/3,6	m/s ²
Razina zvučnog tlaka, LpA	108	dB(A)
Razina zvučne snage, LwA	119	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	6,0	kg
Duljina vodilice (kraća/dulja)	40 / 75	cm
Cijena	1429	€
Namjena	Profesionalna	

Stihl MS 880

STIHL Vertriebszentrale

AG & Co. KG

Robert-Bosch-Str. 13

64807 Dieburg

Germany

Tel.: 06071 30 55 358

Fax: 06071 30 55 438

E-Mail: kundenservice@stihl.de

Internet: www.stihl.de

Internet: www.viking-garten.de



Značajke motora		
Zapremina cilindra	121,6	cm ³
Izlazna snaga	6,4	kW
Spremnik goriva i ulja		
Zapremina rezervoara goriva	1,3	L
Zapremina rezervoara ulja	0,7	L
Vibracije i buka		
Ekvivalentna razina vibracija (AHV, eq) prednja / stražnja ručka	8,9/8,9	m/s ²
Razina zvučnog tlaka, LpA	103	dB(A)
Razina zvučne snage, LwA	116	dB(A)
Ostale značajke		
Masa (bez rezne opreme)	10	kg
Duljina vodilice (kraća/dulja)	53 / 105	cm
Cijena	1879	€
Namjena	Profesionalna	

KATALOG HARVESTERSKIH GLAVA



1. AFM	1
2. CTL	3
3. JOHN DEERE	6
4. KESLA	13
5. KETO	15
6. KOMATSU	19
7. LOG MAX	24
8. LOGSET	29
9. PONSSE	33
10. SILVATEC	37
11. SP	39
12. TAPIO	44
13. WARATAH	46
14. WOODY	59
15. ZÖGgeler	62

AFM 60

AFM-Forest Ltd
Vasarakatu 21
Fin-40320 Jyväskylä
Finska
Internet: www.afm-forest.fi



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	500 mm
Sječni promjer	700 mm
Snaga	80 kW
Hidraulični sistem	Block hydraulic system
Radni tlak	320.0 bar
Protok	-
Spremnik ulja	250 Litara
Sječni sistem	1 fixed and 3 moving delimbing knives
Uređaj za posmak	3 hydr. driven steel feed rollers
Posmična brzina	6,0 m/s
Sila posmaka	25 kN
Mjerni uređaj	Available for e.g.: Motomit IT/PC, DASA 380, DASA 4, CapsWin, VMM 2000, Timberjack 3000.
Masa s rotatorom	1400 kg
Cijena	

AFM 85 Magnum

AFM-Forest Ltd
Vasarakatu 21
Fin-40320 Jyväskylä
Finska
Internet: www.afm-forest.fi



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	700 mm
Sječni promjer	900 mm
Snaga	110 kW
Hidraulični sistem	Block hydraulic system
Radni tlak	320.0 bar
Protok	-
Spremnik ulja	450 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	3 hydr. driven steel feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	40 kN
Mjerni uređaj	Motomit IT/PC, DASA 380, Timberjack 3000, Valmet Maxi.
Masa s rotatorom	2900 kg
Cijena	

CTL 40 HW "LAUBHOLZAGGREGAT"

CTL Technology GmbH
Ladestraße 4
D-09465 Sehmetal/OT Sehma
Njemačka
Tel.: +49(0)3733/6704-0
Fax: +49(0)3733/670426
E-Mail: info@ctl-technology.de
Internet: www.ctl-technology.de



TEHNIČKI DETALJI	
Tip	Special harvester head for harvesting hardwood capable of handling twisted stems. Equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	400 mm
Sječni promjer	430 mm
Snaga	75 kW
Hidraulični sistem	Single-circuit hydr. system
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	160 Litara
Sječni sistem	1 upper V-shaped controlled de-limbing knife, can be released to handle twisted stems, 2 moving upper stem-encircling de-limbing knives.
Uređaj za posmak	2 large, moveable rollers with horizontal axle and roller pressure transmission
Posmična brzina	4,5 m/s
Sila posmaka	24 kN
Mjerni uređaj	Motomit IT, PC od. DASA 4. Length recording wheel with gas pressure spring, Diameter measurement by means of two callipers in the feed roller pressure transmission
Masa s rotatorom	740 kg
Cijena	53700 €

CTL 453

CTL Technology GmbH
 Ladestraße 4
 D-09465 Sehmat/OT Sehma
 Njemačka
 Tel.: +49(0)3733/6704-0
 Fax: +49(0)3733/670426
 E-Mail: info@ctl-technology.de
 Internet: www.ctl-technology.de



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	450 mm
Sječni promjer	530 mm
Snaga	75 kW
Hidraulični sistem	Single-circuit hydr. system
Radni tlak	200.0 bar
Protok	-
Spremnik ulja	160 Litara
Sječni sistem	1 fixed and 4 moving delimbing knives
Uređaj za posmak	2 large, moveable rollers with horizontal axle and roller pressure transmission
Posmična brzina	4,5 m/s
Sila posmaka	20 kN
Mjerni uređaj	Motomit IT, PC od. DASA 4. Length recording wheel with gas pressure spring, Diameter measurement by means of two callipers in the feed roller pressure transmission
Masa s rotatorom	710 kg
Cijena	50700 €

JOHN DEERE 754

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI	
Tip	Harvesting head equipped with delimbing tools, feed rollers, hydr. chain saw. The powerful and well-positioned saw unit takes care of fast and precise felling and cross cutting.
Promjer kresanja	400 mm
Sječni promjer	550 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	200 Litara
Sječni sistem	2 fixed and 5 moving delimbing knives.
Uređaj za posmak	4 hydr. steel feed rollers
Posmična brzina	4,5 m/s
Sila posmaka	28 kN
Mjerni uređaj	Timbermatic 300, TimberRite. Integrated measuring and control unit operated by computer system for harvester head and TMC functions
Masa s rotatorom	820 kg
Cijena	-

JOHN DEERE H 270

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	480 mm
Sječni promjer	650 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	240.0 bar
Protok	-
Spremnik ulja	225 Litara
Sječni sistem	Four moving delimbing knives, one floating top knife, and one fixed back knife
Uređaj za posmak	2WD with hydraulically driven rubber feed rollers
Posmična brzina	4,5 m/s
Sila posmaka	34 kN
Mjerni uređaj	Timbermatic 300, TimberRite. Integrated measuring and control unit operated by computer system for harvester head and TMC functions
Masa s rotatorom	1310 kg
Cijena	-

JOHN DEERE H 290

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	510 mm
Sječni promjer	750 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	350 Litara
Sječni sistem	4 moving delimbing knives, 2 fixed back knife
Uređaj za posmak	2 hydraulically driven steel feed rollers
Posmična brzina	4,5 m/s
Sila posmaka	42 kN
Mjerni uređaj	Timbermatic 300, TimberRite. Integrated measuring and control unit operated by computer system for harvester head and TMC functions
Masa s rotatorom	1870 kg
Cijena	-

JOHN DEERE H 412

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	330 mm
Sječni promjer	470 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	280 Litara
Sječni sistem	3 moving delimbing knives, 2 fixed back knife
Uređaj za posmak	4 hydraulically driven steel feed rollers
Posmična brzina	5,3 m/s
Sila posmaka	17 kN
Mjerni uređaj	Timbermatic 300, H09 and TimberRite, Motomit IT/PC, Dasa 4
Masa s rotatorom	733 kg
Cijena	-

JOHN DEERE H 414

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	430 mm
Sječni promjer	620 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	340 Litara
Sječni sistem	4 moving delimbing knives, 2 fixed back knife
Uređaj za posmak	4 hydraulically driven steel feed rollers
Posmična brzina	5,3 m/s
Sila posmaka	27 kN
Mjerni uređaj	Timbermatic 300, H09 and TimberRite, Motomit IT/PC, Dasa 4
Masa s rotatorom	1000 kg
Cijena	-

JOHN DEERE H 480

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	480 mm
Sječni promjer	650 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	240 Litara
Sječni sistem	4 moving delimbing knives, 2 fixed back knife
Uređaj za posmak	4 hydraulically driven steel feed rollers
Posmična brzina	4,5 m/s
Sila posmaka	30 kN
Mjerni uređaj	Timbermatic 300, TimberRite. Integrated measuring and control unit operated by computer system for harvester head and TMC functions
Masa s rotatorom	1200 kg
Cijena	59500 €

JOHN DEERE H 480C

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	460 mm
Sječni promjer	710 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	340 Litara
Sječni sistem	4 moving delimbing knives, 2 fixed back knife
Uređaj za posmak	4 hydraulically driven steel feed rollers
Posmična brzina	4,2 m/s
Sila posmaka	30 kN
Mjerni uređaj	Timbermatic 300, TimberRite. Integrated measuring and control unit operated by computer system for harvester head and TMC functions
Masa s rotatorom	1240 kg
Cijena	-

KESLA 20 SH

KESLA OYJ
Postfach 282
FIN-80101 Joensuu
Finska
Internet: www.kesla.fi



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	330 mm
Sječni promjer	450 mm
Snaga	44 kW
Hidraulični sistem	-
Radni tlak	175.0 bar
Protok	-
Spremnik ulja	120 Litara
Sječni sistem	2 moving delimbing knives, 1 fixed back knife
Uređaj za posmak	Hydr driven cylinder and gripper
Posmična brzina	1,0 m/s
Sila posmaka	-
Mjerni uređaj	EPEC 4W30
Masa s rotatorom	520 kg
Cijena	31000 €

KESLA 25 RH

KESLA OYJ
Postfach 282
FIN-80101 Joensuu
Finska
Internet: www.kesla.fi



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	550 mm
Sječni promjer	670 mm
Snaga	90 kW
Hidraulični sistem	-
Radni tlak	210.0 bar
Protok	-
Spremnik ulja	200 Litara
Sječni sistem	4 moving delimbing knives, 1 fixed back knife
Uređaj za posmak	2 hydr. driven steel feed rollers
Posmična brzina	3,8 m/s
Sila posmaka	23 kN
Mjerni uređaj	Motomit IT
Masa s rotatorom	750 kg
Cijena	50400 €

KETO 105 Supreme

KONE-KETONEN OY
Kehätie 25
FIN-64100 Kristiinankaupunki
Finska
Tel.: +358 62204100
Internet: www.kone-ketonen.fi



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	400 mm
Sječni promjer	450 mm
Snaga	70 kW
Hidraulični sistem	-
Radni tlak	210.0 bar
Protok	-
Spremnik ulja	190 Litara
Sječni sistem	1 fixed and 2 moving delimbing knives
Uređaj za posmak	2 hydr. driven chain belts
Posmična brzina	4,0 m/s
Sila posmaka	18 kN
Mjerni uređaj	EPEC 4W30, 4W50, Motomit IT.
Masa s rotatorom	690 kg
Cijena	-

KETO 155 Supreme

KONE-KETONEN OY
 Kehätie 25
 FIN-64100 Kristiinankaupunki
 Finska
 Tel.: +358 62204100
 Internet: www.kone-ketonen.fi



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	450 mm
Sječni promjer	550 mm
Snaga	85 kW
Hidraulični sistem	-
Radni tlak	210.0 bar
Protok	-
Spremnik ulja	240 Litara
Sječni sistem	1 fixed and 2 moving delimbing knives
Uređaj za posmak	2 hydr. driven chain belts
Posmična brzina	3,8 m/s
Sila posmaka	24 kN
Mjerni uređaj	EPEC 4W30, 4W50, Motomit IT.
Masa s rotatorom	850 kg
Cijena	-

KETO 455 Supreme

KONE-KETONEN OY
Kehätie 25
FIN-64100 Kristiinankaupunki
Finska
Tel.: +358 62204100
Internet: www.kone-ketonen.fi



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	600 mm
Sječni promjer	700 mm
Snaga	150 kW
Hidraulični sistem	-
Radni tlak	210.0 bar
Protok	-
Spremnik ulja	300 Litara
Sječni sistem	1 fixed and 2 moving delimbing knives
Uređaj za posmak	2 hydr. driven chain belts
Posmična brzina	3,8 m/s
Sila posmaka	30 kN
Mjerni uređaj	EPEC 4W30, 4W50, Motomit IT.
Masa s rotatorom	1080 kg
Cijena	-

KETO 55 Supreme

KONE-KETONEN OY
Kehätie 25
FIN-64100 Kristiinankaupunki
Finska
Tel.: +358 62204100
Internet: www.kone-ketonen.fi



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	320 mm
Sječni promjer	370 mm
Snaga	60 kW
Hidraulični sistem	-
Radni tlak	210.0 bar
Protok	-
Spremnik ulja	160 Litara
Sječni sistem	1 fixed and 2 moving delimbing knives
Uređaj za posmak	2 hydr. driven chain belts
Posmična brzina	3,8 m/s
Sila posmaka	15 kN
Mjerni uređaj	EPEC 4W30, 4W50, Motomit IT.
Masa s rotatorom	510 kg
Cijena	-

Komatsu340


KOMATSU FOREST AB
BOX 7124
S-90704 Umea
Švedska
Internet: www.partekforest.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	350 mm
Sječni promjer	530 mm
Snaga	-
Hidraulični sistem	Block hydraulic system
Radni tlak	250.0 bar
Protok	-
Spremnik ulja	220 Litara
Sječni sistem	-
Uređaj za posmak	Steel or steel/rubber feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	18 kN
Mjerni uređaj	-
Masa s rotatorom	-
Cijena	-

Komatsu 350.1

KOMATSU FOREST AB
BOX 7124
S-90704 Umea
Švedska
Internet: www.partekforest.com

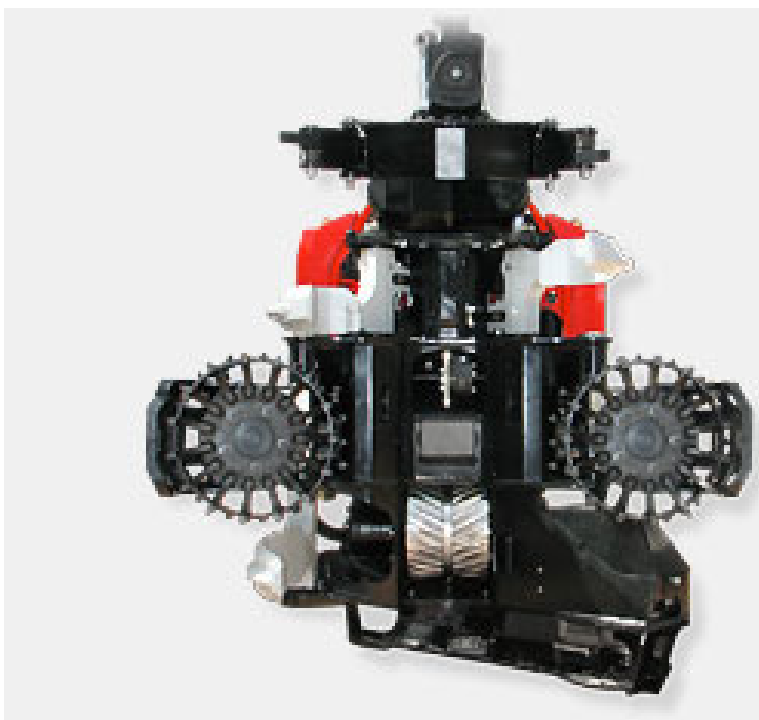


TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	400 mm
Sječni promjer	600 mm
Snaga	-
Hidraulični sistem	-
Radni tlak	250.0 bar
Protok	-
Spremnik ulja	300 Litara
Sječni sistem	-
Uređaj za posmak	Steel feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	25 kN
Mjerni uređaj	-
Masa s rotatorom	960 kg
Cijena	-

Komatsu 360.2

KOMATSU FOREST AB
BOX 7124
S-90704 Umeå
Švedska
Internet: www.partekforest.com

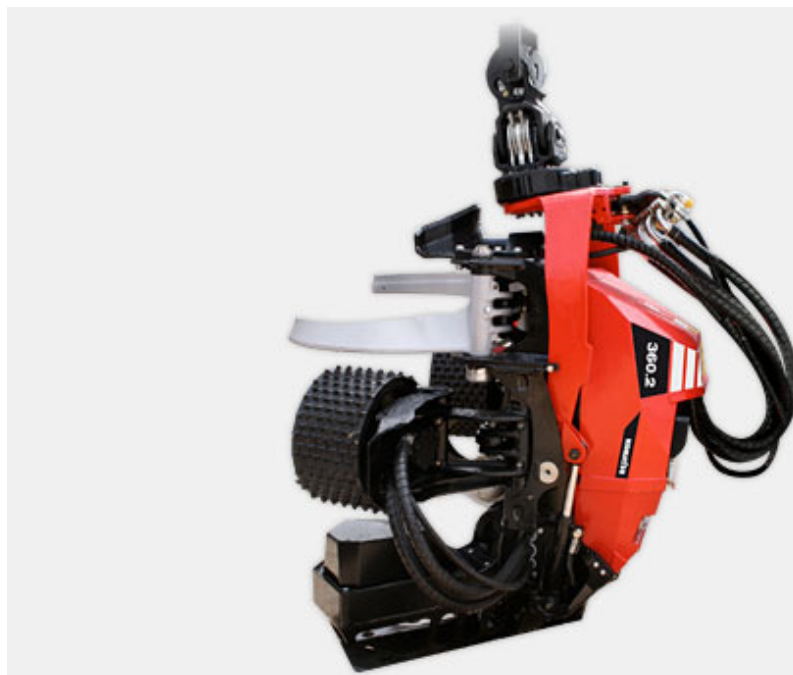

TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	500 mm
Sječni promjer	650 mm
Snaga	-
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	250.0 bar
Protok	-
Spremnik ulja	310 Litara
Sječni sistem	-
Uređaj za posmak	Steel or rubber feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	26 kN
Mjerni uređaj	-
Masa s rotatorom	1245 kg
Cijena	-

Komatsu 365


KOMATSU FOREST AB
BOX 7124
S-90704 Umea
Švedska
Internet: www.partekforest.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	470 mm
Sječni promjer	650 mm
Snaga	-
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	300 Litara
Sječni sistem	-
Uređaj za posmak	Steel feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	28 kN
Mjerni uređaj	-
Masa s rotatorom	1200 kg
Cijena	-

Komatsu 370.2

KOMATSU FOREST AB
BOX 7124
S-90704 Umea
Švedska
Internet: www.partekforest.com

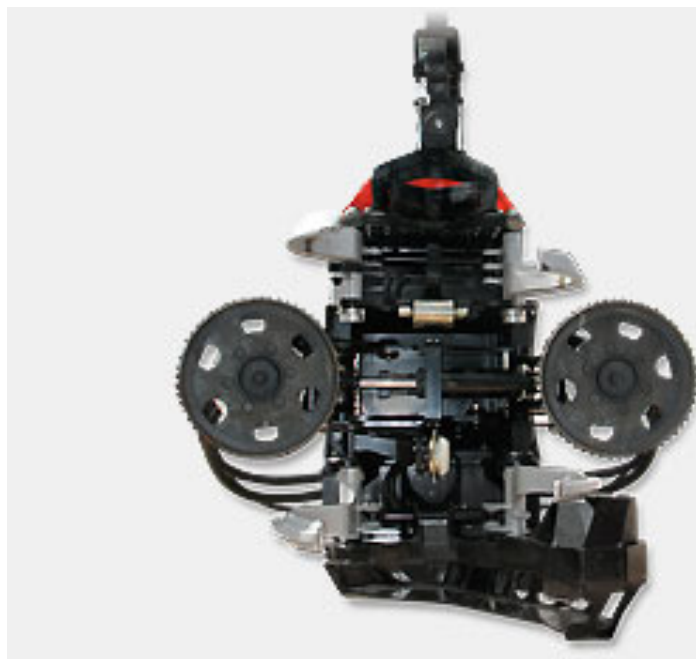

TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	500 mm
Sječni promjer	700 mm
Snaga	-
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	280.0 bar
Protok	-
Spremnik ulja	300 Litara
Sječni sistem	-
Uređaj za posmak	Steel or rubber feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	31 kN
Mjerni uređaj	-
Masa s rotatorom	1470 kg
Cijena	-

LOG MAX 4000

LOG MAX AB
Stationsvägen 12
S-770 13 Grangärde
Švedska
Internet: www.logmax.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	355 mm
Sječni promjer	500 mm
Snaga	90 kW
Hidraulični sistem	Closed single-circuit hydr. system
Radni tlak	250.0 bar
Protok	-
Spremnik ulja	210 Litara
Sječni sistem	4 moving delimbing knives
Uređaj za posmak	2 hydr. driven steel feed rollers or Flexdrive-rollers
Posmična brzina	4,2 m/s
Sila posmaka	21 kN
Mjerni uređaj	Log Mate 402 linear measurement via measuring wheel, diameter measurement via rollers
Masa s rotatorom	630 kg
Cijena	44650 €

LOG MAX 5000 C

LOG MAX AB
Stationsvägen 12
S-770 13 Grangärde
Švedska
Internet: www.logmax.com



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	415 mm
Sječni promjer	550 mm
Snaga	120 kW
Hidraulični sistem	Closed single-circuit hydr. system
Radni tlak	230.0 bar
Protok	-
Spremnik ulja	230 Litara
Sječni sistem	4 moving delimbing knives
Uređaj za posmak	2 hydr. driven steel feed rollers or Flexdrive-rollers
Posmična brzina	5,0 m/s
Sila posmaka	21 kN
Mjerni uređaj	Log Mate 402 linear measurement via measuring wheel, diameter measurement via rollers
Masa s rotatorom	908 kg
Cijena	49950€

LOG MAX 6000

LOG MAX AB
Stationsvägen 12
S-770 13 Grangärde
Švedska
Internet: www.logmax.com



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	500 mm
Sječni promjer	650 mm
Snaga	160 kW
Hidraulični sistem	Closed single-circuit hydr. system
Radni tlak	260.0 bar
Protok	-
Spremnik ulja	260 Litara
Sječni sistem	4 moving delimbing knives
Uređaj za posmak	2 hydr. driven steel feed rollers or Flexdrive-rollers
Posmična brzina	5,0 m/s
Sila posmaka	28 kN
Mjerni uređaj	Log Mate 402 linear measurement via measuring wheel, diameter measurement via rollers
Masa s rotatorom	1294 kg
Cijena	58800€

LOG MAX 7000

LOG MAX AB
Stationsvägen 12
S-770 13 Grangärde
Švedska
Internet: www.logmax.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	560 mm
Sječni promjer	650 mm
Snaga	150 kW
Hidraulični sistem	Closed single-circuit hydr. system
Radni tlak	300.0 bar
Protok	-
Spremnik ulja	300 Litara
Sječni sistem	4 moving delimbing knives
Uređaj za posmak	2 hydr. driven steel feed rollers or Flexdrive-rollers
Posmična brzina	5,1 m/s
Sila posmaka	39 kN
Mjerni uređaj	Log Mate 402 linear measurement via measuring wheel, diameter measurement via rollers
Masa s rotatorom	1549 kg
Cijena	64350€

LOG MAX 9000 B

LOG MAX AB
Stationsvägen 12
S-770 13 Grangärde
Švedska
Internet: www.logmax.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	625 mm
Sječni promjer	720 mm
Snaga	150 kW
Hidraulični sistem	Closed single-circuit hydr. system
Radni tlak	300.0 bar
Protok	-
Spremnik ulja	300 Litara
Sječni sistem	5 moving delimbing knives
Uređaj za posmak	2 hydr. driven steel feed rollers or Flexdrive-rollers
Posmična brzina	5,1 m/s
Sila posmaka	42 kN
Mjerni uređaj	Log Mate 402 linear measurement via measuring wheel, diameter measurement via rollers
Masa s rotatorom	1652 kg
Cijena	71900 €

LOG MAX 928

LOG MAX AB
Stationsvägen 12
S-770 13 Grangärde
Švedska
Internet: www.logmax.com




TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	275 mm
Sječni promjer	420 mm
Snaga	49 kW
Hidraulični sistem	Closed single-circuit hydr. system
Radni tlak	210.0 bar
Protok	-
Spremnik ulja	150 Litara
Sječni sistem	4 moving delimbing knives
Uređaj za posmak	2 hydr. driven steel feed rollers or Flexdrive-rollers
Posmična brzina	3,3 m/s
Sila posmaka	16 kN
Mjerni uređaj	Log Mate 402 linear measurement via measuring wheel, diameter measurement via rollers
Masa s rotatorom	430 kg
Cijena	-

LOGSET TH45


OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.fi

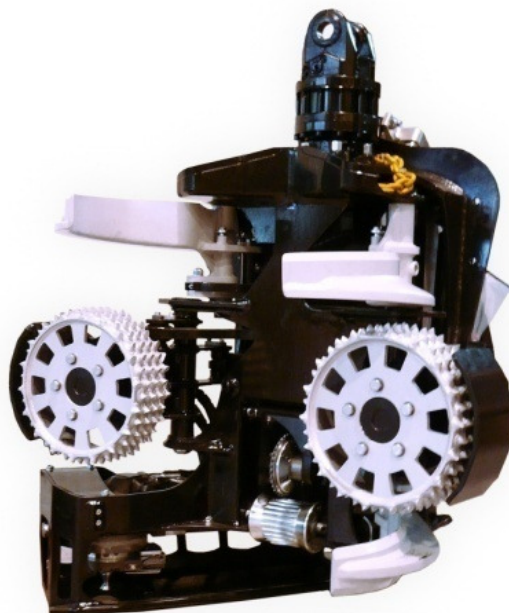

TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	400 mm
Sječni promjer	560 mm
Snaga	90 kW
Hidraulični sistem	Closed constant-pressure system
Radni tlak	280.0 bar
Protok	
Spremnik ulja	150 Litara
Sječni sistem	1 fixed and 3 moving delimbing knives
Uređaj za posmak	
Posmična brzina	6,0 m/s
Sila posmaka	
Mjerni uređaj	
Masa s rotatorom	850 kg
Cijena	-

LOGSET TH75/TH 75X

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.fi

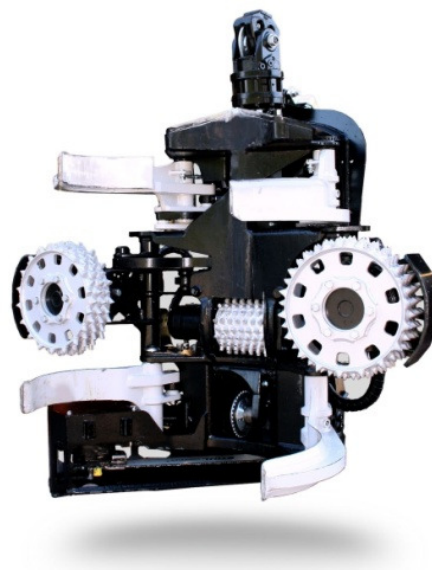

TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	750 mm
Sječni promjer	820 mm
Snaga	
Hidraulični sistem	Closed constant-pressure system
Radni tlak	280.0 bar
Protok	
Spremnik ulja	200 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	4 feed motors with 2 drive rollers
Posmična brzina	5,6 m/s
Sila posmaka	
Mjerni uređaj	
Masa s rotatorom	1300 kg
Cijena	-

PONSSE H5

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: www.ponsse.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	550 mm
Sječni promjer	600 mm
Snaga	80 kW
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	
Protok	
Spremnik ulja	
Sječni sistem	1 fixed and 4 hydr. moving delimbing knives
Uređaj za posmak	3 feed rollers
Posmična brzina	5,5 m/s
Sila posmaka	19 kN
Mjerni uređaj	PONSSE Opti4G
Masa s rotatorom	900 kg
Cijena	-

PONSSE H6

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: www.ponsse.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	
Sječni promjer	640 mm
Snaga	120 kW
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	280 bar
Protok	
Spremnik ulja	300 Litara
Sječni sistem	2 fixed and 4 hydr. moving delimbing knives
Uređaj za posmak	3 spiked rollers
Posmična brzina	6,0 m/s
Sila posmaka	25 kN
Mjerni uređaj	PONSSE Opti4G
Masa s rotatorom	1050 kg
Cijena	

PONSSE H7

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: www.ponsse.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	600 mm
Sječni promjer	640 mm
Snaga	130 kW
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	280 bar
Protok	
Spremnik ulja	300 Litara
Sječni sistem	1 fixed and 4 hydr. moving delimbing knives
Uređaj za posmak	3 spiked rollers
Posmična brzina	5,0 m/s
Sila posmaka	30 kN
Mjerni uređaj	PONSSE Opti4G
Masa s rotatorom	1200 kg
Cijena	70000 €

PONSSE H8

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: www.ponsse.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	600 mm
Sječni promjer	640 mm
Snaga	130 kW
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	280 bar
Protok	
Spremnik ulja	300 Litara
Sječni sistem	1 fixed and 4 hydr. moving delimbing knives
Uređaj za posmak	3 spiked rollers
Posmična brzina	5,0 m/s
Sila posmaka	36 kN
Mjerni uređaj	PONSSE Opti4G
Masa s rotatorom	1400 kg
Cijena	85000 €

PONSSE H8

PONSSE OYJ
 Ponsentie 22
 FIN-74200 Vieremä
 Finska
 Internet: www.ponsse.com



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	600 mm
Sječni promjer	640 mm
Snaga	130 kW
Hidraulični sistem	Open single-circuit hydr. system
Radni tlak	280 bar
Protok	
Spremnik ulja	300 Litara
Sječni sistem	1 fixed and 4 hydr. moving delimbing knives
Uređaj za posmak	3 spiked rollers
Posmična brzina	5,0 m/s
Sila posmaka	36 kN
Mjerni uređaj	PONSSE Opti4G
Masa s rotatorom	1400 kg
Cijena	85000 €

SILVATEC 560

SILVATEC Skovmaskiner A/S
Fabriksvej 6
DK-9640 Farso
Danska
Tel.: 0045/9863/2411
E-mail: silvatec@silvatec.com
Internet: www.silvatec.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	600 mm
Sječni promjer	635 mm
Snaga	250 kW
Hidraulični sistem	
Radni tlak	270 bar
Protok	
Spremnik ulja	250 Litara
Sječni sistem	1 fixed and 5 moving delimbing knives
Uređaj za posmak	2 hydrst. driven steel rollers
Posmična brzina	5,5 m/s
Sila posmaka	37 kN
Mjerni uređaj	TM 1000 ili TM 2200
Masa s rotatorom	1425 kg
Cijena	59800 €

SILVATEC 560

SILVATEC Skovmaskiner A/S
 Fabriksvej 6
 DK-9640 Farso
 Danska
 Tel.: 0045/9863/2411
 E-mail: silvatec@silvatec.com
 Internet: www.silvatec.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	500 mm
Sječni promjer	550 mm
Snaga	
Hidraulični sistem	
Radni tlak	270 bar
Protok	
Spremnik ulja	
Sječni sistem	1 fixed and 5 moving delimbing knives
Uređaj za posmak	2 hydrst. driven steel rollers
Posmična brzina	6,5 m/s
Sila posmaka	29 kN
Mjerni uređaj	TM 1000 ili TM 2200
Masa s rotatorom	1024 kg
Cijena	51600 €

SP 451 LF

SP MASKINER i Ljungby AB
Box 870
SE-34118 Ljungby
Švedska
Internet: www.spmaskiner.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	350 mm
Sječni promjer	530 mm
Snaga	73 kW
Hidraulični sistem	Constant-pressure system
Radni tlak	230 bar
Protok	
Spremnik ulja	190 Litara
Sječni sistem	1 fixed and 4 moving delimbing knives
Uređaj za posmak	2 hydrst. driven steel rollers
Posmična brzina	6,0 m/s
Sila posmaka	18 kN
Mjerni uređaj	DASA, Motomit IT, Valmet MAXI, Timbermatic 300, 3000
Masa s rotatorom	700 kg
Cijena	

SP 561 LF

SP MASKINER i Ljungby AB
Box 870
SE-34118 Ljungby
Švedska
Internet:
www.spmaskiner.com



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	430 mm
Sječni promjer	600 mm
Snaga	96 kW
Hidraulični sistem	Constant-pressure system
Radni tlak	250 bar
Protok	
Spremnik ulja	195 Litara
Sječni sistem	1 fixed and 5 moving delimbing knives
Uređaj za posmak	2 hydrst. driven rollers
Posmična brzina	6,0 m/s
Sila posmaka	28 kN
Mjerni uređaj	DASA, Motomit IT, Valmet MAXI, Timbermatic 300, 3000
Masa s rotatorom	990 kg
Cijena	

SP 591 LX

SP MASKINER i Ljungby AB
Box 870
SE-34118 Ljungby
Švedska
Internet: www.spmaskiner.com



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	430 mm
Sječni promjer	600 mm
Snaga	96 kW
Hidraulični sistem	Constant-pressure system
Radni tlak	250 bar
Protok	
Spremnik ulja	195 Litara
Sječni sistem	2 fixed and 2 moving delimbing knives
Uređaj za posmak	3 hydrst. driven rollers
Posmična brzina	7,0 m/s
Sila posmaka	30 kN
Mjerni uređaj	DASA, Motomit IT, Valmet MAXI, Timbermatic 300, 3000
Masa s rotatorom	1800 kg
Cijena	

SP 761 LF

SP MASKINER i Ljungby AB
Box 870
SE-34118 Ljungby
Švedska
Internet: www.spmaskiner.com



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	540 mm
Sječni promjer	900 mm
Snaga	130 kW
Hidraulični sistem	Constant-pressure system
Radni tlak	250 bar
Protok	
Spremnik ulja	250 Litara
Sječni sistem	2 fixed and 3 moving delimbing knives
Uređaj za posmak	2 (4 optional). driven rollers
Posmična brzina	6,0 m/s
Sila posmaka	46 kN
Mjerni uređaj	
Masa s rotatorom	2030 kg
Cijena	

SP 861 LF

SP Maskiner AB
Box 322
SE-34126 Ljungby
Švedska
<http://www.spmaskiner.se/>



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	550 mm
Sječni promjer	800 mm
Snaga	-
Hidraulični sistem	Constant-pressure system
Radni tlak	-
Protok	
Spremnik ulja	-
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	
Posmična brzina	6,0 m/s
Sila posmaka	46 kN
Mjerni uređaj	-
Masa s rotatorom	2055 kg
Cijena	

TAPIO 350

RIUTTOLEHTO OY
Teollisuustie 11 A
FI-63800 Soini
FINSKA
tapio@riuttlehto.fi



TEHNIČKI DETALJI

Tip	Harvester head for mounting tractors, small tractors, small wood harvesting equipment
Promjer kresanja	40 mm
Sječni promjer	350 mm
Snaga	28 Kw
Hidraulični sistem	
Radni tlak	
Protok	
Spremnik ulja	
Sječni sistem	
Uređaj za posmak	
Posmična brzina	0,8 m/s
Sila posmaka	
Mjerni uređaj	Lenght measuring wgeel
Masa s rotatorom	285 kg
Cijena	20900 €

TAPIO 400

RIUTTOLEHTO OY
Teollisuustie 11 A
FI-63800 Soini
FINSKA
tapio@riuttolehto.fi



TEHNIČKI DETALJI

Tip	Harvester head for mounting on excavators 6 - 14t large tractors and other tractors
Promjer kresanja	400 mm
Sječni promjer	450 mm
Snaga	35 Kw
Hidraulični sistem	
Radni tlak	
Protok	
Spremnik ulja	
Sječni sistem	Knife
Uređaj za posmak	
Posmična brzina	1,0 m/s
Sila posmaka	25 kN
Mjerni uređaj	eLogger with length measuring wheel
Masa s rotatorom	470 kg
Cijena	25900 €

WARATAH H 412

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	370 mm
Sječni promjer	470 mm
Snaga	
Hidraulični sistem	
Radni tlak	280 bar
Protok	
Spremnik ulja	280 Litara
Sječni sistem	2 fixed and 3 moving delimbing knives
Uređaj za posmak	4 hydr. driven feed rollers
Posmična brzina	6,0 m/s
Sila posmaka	17 kN
Mjerni uređaj	Available for e.g.:DASA 380C, DASA 4, Timberjack 3000, Timbermatic 300, TimberRite, Motomit IT
Masa s rotatorom	780 kg
Cijena	58000 €

WARATAH H270

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	460 mm
Sječni promjer	650 mm
Snaga	
Hidraulični sistem	
Radni tlak	280 bar
Protok	
Spremnik ulja	260 Litara
Sječni sistem	1 fixed and 5 moving delimbing knives
Uređaj za posmak	2 hydr. driven feed rollers
Posmična brzina	6,0 m/s
Sila posmaka	34 kN
Mjerni uređaj	Available for e.g.:DASA 380C, DASA 4, Timberjack 3000, Timbermatic 300, TimberRite, Motomit IT
Masa s rotatorom	1310 kg
Cijena	63000 €

WARATAH H290

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	510 mm
Sječni promjer	750 mm
Snaga	
Hidraulični sistem	
Radni tlak	280 bar
Protok	
Spremnik ulja	320 Litara
Sječni sistem	1 fixed and 4 moving delimbing knives
Uređaj za posmak	2 hydr. driven feed rollers
Posmična brzina	6,0 m/s
Sila posmaka	37 kN
Mjerni uređaj	Available for e.g.:DASA 380C, DASA 4, Timberjack 3000, Timbermatic 300, TimberRite, Motomit IT
Masa s rotatorom	1850 kg
Cijena	76000 €

WARATAH H414

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	430 mm
Sječni promjer	620 mm
Snaga	
Hidraulični sistem	
Radni tlak	280 bar
Protok	
Spremnik ulja	200 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	4 hydr. driven feed rollers
Posmična brzina	6,0 m/s
Sila posmaka	27 kN
Mjerni uređaj	Available for e.g.:DASA 380C, DASA 4, Timberjack 3000, Timbermatic 300, TimberRite, Motomit IT
Masa s rotatorom	1140 kg
Cijena	63000 €

WARATAH H480 C

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	460 mm
Sječni promjer	710 mm
Snaga	
Hidraulični sistem	
Radni tlak	280 bar
Protok	
Spremnik ulja	290 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	4 hydr. driven feed rollers
Posmična brzina	5,3 m/s
Sila posmaka	30 kN
Mjerni uređaj	Available for e.g.:DASA 380C, DASA 4, Timberjack 3000, Timbermatic 300, TimberRite, Motomit IT
Masa s rotatorom	1200 kg
Cijena	69000 €

WARATAH HTH 618 C

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	520 mm
Sječni promjer	550 mm
Snaga	
Hidraulični sistem	
Radni tlak	320 bar
Protok	
Spremnik ulja	320 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	3 hydr. driven feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	
Mjerni uređaj	TimberRite
Masa s rotatorom	1940 kg
Cijena	

WARATAH HTH250 - HD

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	400 mm
Sječni promjer	570 mm
Snaga	
Hidraulični sistem	
Radni tlak	280 bar
Protok	
Spremnik ulja	180 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	4 hydr. driven feed rollers
Posmična brzina	6,0 m/s
Sila posmaka	30 Kn
Mjerni uređaj	Available for e.g.:DASA 380C, DASA 4, Timberjack 3000, Timbermatic 300, TimberRite, Motomit IT
Masa s rotatorom	950 kg
Cijena	50700 €

WARATAH HTH460

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	400 mm
Sječni promjer	620 mm
Snaga	
Hidraulični sistem	
Radni tlak	280 bar
Protok	
Spremnik ulja	200 Litara
Sječni sistem	1 fixed and 4 moving delimbing knives
Uređaj za posmak	4 hydr. driven feed rollers
Posmična brzina	6,0 m/s
Sila posmaka	28 kN
Mjerni uređaj	Available for e.g.:DASA 380C, DASA 4, Timberjack 3000, Timbermatic 300, TimberRite, Motomit IT
Masa s rotatorom	820 kg
Cijena	59000 €

WARATAH HTH616 C

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	520 mm
Sječni promjer	550 mm
Snaga	
Hidraulični sistem	
Radni tlak	350 bar
Protok	
Spremnik ulja	360 Litara
Sječni sistem	2 fixed and 2 moving delimbing knives
Uređaj za posmak	3 hydr. driven feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	
Mjerni uređaj	TimberRite
Masa s rotatorom	820 kg
Cijena	

WARATAH HTH622 B

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	640 mm
Sječni promjer	750 mm
Snaga	
Hidraulični sistem	
Radni tlak	320 bar
Protok	
Spremnik ulja	320 Litara
Sječni sistem	1 fixed and 2 moving delimbing knives
Uređaj za posmak	3 hydr. driven feed rollers
Posmična brzina	5,7 m/s
Sila posmaka	38 Kn
Mjerni uređaj	TimberRite
Masa s rotatorom	2120 kg
Cijena	

WARATAH HTH623 B

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	700 mm
Sječni promjer	750 mm
Snaga	
Hidraulični sistem	
Radni tlak	320 bar
Protok	
Spremnik ulja	320 Litara
Sječni sistem	1 fixed and 2 moving delimbing knives
Uređaj za posmak	3 hydr. driven feed rollers
Posmična brzina	5,4 m/s
Sila posmaka	47 Kn
Mjerni uređaj	TimberRite
Masa s rotatorom	2800 kg
Cijena	

WARATAH HTH624 C

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI	
Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	760 mm
Sječni promjer	810 mm
Snaga	
Hidraulični sistem	
Radni tlak	320 bar
Protok	
Spremnik ulja	360 Litara
Sječni sistem	1 fixed and 3 moving delimbing knives
Uređaj za posmak	3 hydr. driven feed rollers
Posmična brzina	3,7 m/s
Sila posmaka	
Mjerni uređaj	TimberRite
Masa s rotatorom	3386 kg
Cijena	

WARATAH HTH626

WARATAH
33101 Tampere
Finska
Internet: www.waratah.net



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	880 mm
Sječni promjer	860 mm
Snaga	
Hidraulični sistem	
Radni tlak	320 bar
Protok	
Spremnik ulja	360 Litara
Sječni sistem	1 fixed and 2 moving delimbing knives
Uređaj za posmak	3 hydr. driven feed rollers
Posmična brzina	3,7 m/s
Sila posmaka	
Mjerni uređaj	TimberRite
Masa s rotatorom	4720 kg
Cijena	

WOODY 50 H

KONRAD Forsttechnik GmbH
Oberpreitenegg 52
A-9451 Preitenegg
Austrija
Tel.: +43(0)4354/2432
E-mail: office@forsttechnik.at
Internet: www.forsttechnik.at



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	500 mm
Sječni promjer	550 mm
Snaga	88 kW
Hidraulični sistem	Single or dual-circuit hydr. system
Radni tlak	350 bar
Protok	
Spremnik ulja	180 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	2 hydr. driven feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	30 kN
Mjerni uređaj	KONRAD MC 3.0
Masa s rotatorom	1090 kg
Cijena	61100 €

WOODY 70 H

KONRAD Forsttechnik GmbH
Oberpreitenegg 52
A-9451 Preitenegg
Austrija
Tel.: +43(0)4354/2432
E-mail: office@forsttechnik.at
Internet: www.forsttechnik.at



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	700 mm
Sječni promjer	750 mm
Snaga	125 kW
Hidraulični sistem	dual-circuit hydr. system
Radni tlak	320 bar
Protok	
Spremnik ulja	250 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	2 hydr. driven rubber feed rollers, feed unit hydr. upwards foldable
Posmična brzina	4,0 m/s
Sila posmaka	45 kN
Mjerni uređaj	KONRAD MC 2.0
Masa s rotatorom	1720 kg
Cijena	

WOODY 60 H

KONRAD Forsttechnik GmbH
Oberpreitenegg 52
A-9451 Preitenegg
Austrija
Tel.: +43(0)4354/2432
E-mail: office@forsttechnik.at
Internet: www.forsttechnik.at



TEHNIČKI DETALJI

Tip	Harvester head equipped with delimbing tools, feed rollers, hydr. chain saw and electr. linear and diameter measurement
Promjer kresanja	600 mm
Sječni promjer	650 mm
Snaga	110 kW
Hidraulični sistem	Single or dual-circuit hydr. system
Radni tlak	350 bar
Protok	
Spremnik ulja	220 Litara
Sječni sistem	2 fixed and 4 moving delimbing knives
Uređaj za posmak	2 hydr. driven rubber feed rollers
Posmična brzina	5,0 m/s
Sila posmaka	37 kN
Mjerni uređaj	KONRAD MC 3.0
Masa s rotatorom	1350 kg
Cijena	69600 €

ZÖGgeler ZBH 58

Zöggeler
Baumaschinen und Nutzfahrzeuge KG
A-5771 Leogang, Hirnreit 115
Tel. +43(0)6583/20230,
Mobil: +43(0)664/4323182
e-mail: zoeggeler@aon.at
Internet: www.zoeggeler.at



TEHNIČKI DETALJI

Tip	Machine head for felling and processing trees to be mounted on a crane
Promjer kresanja	600 mm
Sječni promjer	700 mm
Snaga	110 kW
Hidraulični sistem	
Radni tlak	300 bar
Protok	
Spremnik ulja	300 Litara
Sječni sistem	5 limbing knives
Uređaj za posmak	4 feed rollers
Posmična brzina	5,5 m/s
Sila posmaka	42 kN
Mjerni uređaj	Photocells measurement
Masa s rotatorom	1500 kg
Cijena	

KATALOG HARVESTERA



1. ECO LOG	1
2. GEMO	7
3. HIGHLANDER	8
4. HSM	9
5. IMPEX	13
6. JOHN DEERE	16
7. KAISER	21
8. KOMATSU	22
9. LOGSET	29
10. MENZI MUCK	31
11. NEUSON	33
12. PONSSE	41
13. PROSILVA	51
14. ROTTNE	53
15. SAMPO	58
16. SILVATEC	60

ECO LOG 550 D

ECO LOG Schweden AB
Box 84, Nora Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI				
Tip		Articulated steered 4-wheel Harvester with swing arm Chassis		
Motor		MERCEDES-BENZ OM 926 LA, watercooled 6-cylinder-Turbodiesel with fuel-injection		
Snaga		195 kW		
Transmisija		Hydrost. drive, 2-speed drive. Shiftable differential lock. Tractive power 129 kN		
Hidraulični sistem		Multi-Loop hydr.system for drive and tools		
Hidraulični spremnik		234 Litara		
Spremnik za gorivo		460 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. articulated frame steering		
Kočnice		4 Multi disc brake in final drive		
Gume (gusjenice)		Front and rear: 600/65 - 34, Optional: 710/55 – 34		
Dizalica	Tip	ECO LOG 220 outer boom crane with telescop		
	Doseg	10 m		
	Moment	224 kNm		
Harvesterska glava		-		
Max. sječni promjer		500 mm		
Max. promjer kresanja		355 mm		
Noževi za kresanje		3 moving delimbing knives.		
Uređaj za posmak		2 hydr. steel, FlexDrive or rubber rolls		
Posmična brzina		4,2 m/s		
Mjerni uređaj		DASA 4		
Gusjenice		-		
Masa harvesterske glave		630 kg		
Duljina	Širina	Visina	7145 mm	2606 mm 3420 mm
Radijus okretanja		-		
Clearance		1324 mm		
Net masa		15400 kg		
Cijena		325000 €		

ECO LOG 560 D

ECO LOG Schweden AB
Box 84, Nora Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI				
Tip		Articulated steered 6-wheel Harvester with swing arm Chassis		
Motor		MERCEDES-BENZ OM 926 LA, watercooled 6-cylinder-Turbodiesel with fuel-injection		
Snaga		195 kW		
Transmisija		Hydrost. drive, 3-speed drive. Shiftable differential lock. Tractive power 155 kN		
Hidraulični sistem		Multi-Loop hydr.system for drive and tools		
Hidraulični spremnik		234 Litara		
Spremnik za gorivo		460 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. articulated frame steering		
Kočnice		4 Multi disc brake in final drive		
Gume (gusjenice)		Front: 600/55 - 26,5; rear: 710/55 – 34		
Dizalica	Tip	ECO LOG 250 outer boom crane with telescop		
	Doseg	10 m		
	Moment	255 kNm		
Harvesterska glava		LOGMAX 4000 B ili 5000 D		
Max. sječni promjer		500 mm		
Max. promjer kresanja		355 mm		
Noževi za kresanje		3 moving delimbing knives.		
Uređaj za posmak		2 hydr. steel, FlexDrive or rubber rolls		
Posmična brzina		4,2 m/s		
Mjerni uređaj		DASA 4		
Gusjenice		-		
Masa harvesterske glave		630 kg		
Duljina	Širina	Visina	7300 mm	3420 mm
Radijus okretanja		-		
Clearance		1291 mm		
Net masa		17500 kg		
Cijena		390000 €		

ECO LOG 570 D

ECO LOG Schweden AB
Box 84, Nora Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI				
Tip		Articulated steered 4-wheel Harvester with swing arm chassis		
Motor		MERCEDES-BENZ OM 926 LA, watercooled 6-cylinder-Turbodiesel with fuel-injection		
Snaga		210 kW		
Transmisija		Hydrost. drive, 2-speed drive. Shiftable differential lock. Tractive power 157 kN		
Hidraulični sistem		Multi-Loop hydr.system for drive and tools		
Hidraulični spremnik		234 Litara		
Spremnik za gorivo		460 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. articulated frame steering		
Kočnice		4 Multi disc brake in final drive		
Gume (gusjenice)		Prednje/stražnje: 600/55 - 26,5; optional : 710/55 – 34		
Dizalica		Tip	ECO LOG 250 outer boom crane with telescop	
		Doseg	11,3 m	
		Moment	255 kNm	
Harvesterska glava		LOGMAX 5000 D		
Max. sječni promjer		660 mm		
Max. promjer kresanja		415 mm		
Noževi za kresanje		3 moving delimbing knives.		
Uređaj za posmak		2 hydr. steel, FlexDrive or rubber rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		DASA 4		
Gusjenice		-		
Masa harvesterske glave		950 kg		
Duljina	Širina	Visina	7125 mm	2820 mm3420 mm
Radijus okretanja		-		
Clearance		1324 mm		
Net masa		16000 kg		
Cijena		385000 €		

ECO LOG 580 D

ECO LOG Schweden AB
Box 84, Nora Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI				
Tip		Articulated steered 6-wheel Harvester with swing arm chassis		
Motor		MERCEDES-BENZ OM 926 LA, watercooled 6-cylinder-Turbodiesel with fuel-injection		
Snaga		210 kW		
Transmisija		Hydrost. drive, 3-speed drive. Shiftable differential lock. Tractive power 172 kN		
Hidraulični sistem		Multi-Loop hydr.system for drive and tools		
Hidraulični spremnik		234 Litara		
Spremnik za gorivo		460 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. articulated frame steering		
Kočnice		4 Multi disc brake in final drive		
Gume (gusjenice)		Prednje: 600/55 - 26,5; stražnje : 710/55 – 34		
Dizalica	Tip	ECO LOG 260 outer boom crane with telescop		
	Doseg	10 m		
	Moment	215 kNm		
Harvesterska glava		-		
Max. sječni promjer		690 mm		
Max. promjer kresanja		500 mm		
Noževi za kresanje		3 moving delimbing knives.		
Uređaj za posmak		2 hydr. steel, FlexDrive or rubber rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		DASA 4		
Gusjenice		-		
Masa harvesterske glave		1300 kg		
Duljina	Širina	Visina	7300 mm	2990 mm 3420 mm
Radijus okretanja		-		
Clearance		1191 mm		
Net masa		18500 kg		
Cijena		425000 €		

ECO LOG 590 D

ECO LOG Schweden AB
Box 84, Nora Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI

TEHNIČKI DETALJI					
Tip		Articulated steered 6-wheel Harvester with swing arm chassis			
Motor		MERCEDES-BENZ OM 926 LA, watercooled 6-cylinder-Turbodiesel with fuel-injection			
Snaga		240 kW			
Transmisija		Hydrost. drive, 3-speed drive. Shiftable differential lock. Tractive power 189 kN			
Hidraulični sistem		Multi-Loop hydr.system for drive and tools, load-sensing system			
Hidraulični spremnik		234 Litara			
Spremnik za gorivo		460 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydrost. articulated frame steering			
Kočnice		4 Multi disc brake in final drive			
Gume (gusjenice)		Front 650/60 - 26,5; rear: 710/55 – 34			
Dizalica	Tip		ECO LOG 300 outer boom crane with telescop		
	Doseg		11,3 m		
	Moment		300 kNm		
Harvesterska glava		LOGMAX 7000 C			
Max. sječni promjer		720 mm			
Max. promjer kresanja		560 mm			
Noževi za kresanje		3 moving delimbing knives.			
Uređaj za posmak		2 hydr. steel rolls			
Posmična brzina		5,1 m/s			
Mjerni uređaj		DASA 4			
Gusjenice		-			
Masa harvesterske glave		1575 kg			
Duljina	Širina	Visina	7680 mm	3070 mm	3430 mm
Radijus okretanja		-			
Clearance		1278 mm			
Net masa		19500 kg			
Cijena		455000 €			

ECO LOG SteepHunter 688

ECO LOG Schweden AB
Box 84, Nora Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI			
Tip		8 kotačni harvester	
Motor		6 cyl. MB OM 926LA 7,2 l	
Snaga		225 kW	
Transmisija		Hydrost.meh. Max tensile force: 200 kN; Max speed: 20 km/h	
Hidraulični sistem		Crane pump: 140 cc; Amount of oil @ 1600 rev/ min for crane: 275 l/min; Physical pump: 145 c; Amount of oil @ 1600 rev/ min for harvester head 285 l/min; p:250 bar	
Hidraulični spremnik		200 Litara	
Spremnik za gorivo		460 Litara	
Spojka		-	
Mjenjač		-	
Upravljanje		Steering angle: 43 ° Interphalangeal joint sides: ± 24 °	
Kočnice		-	
Gume (gusjenice)		8-wheel 700/45 - 26.5"	
Dizalica	Tip	EC 260	
	Doseg	10/11,5 m	
	Moment	270 kNm	
Harvesterska glava		LOGMAX 5000 C ILI 6000	
Max. sječni promjer		-	
Max. promjer kresanja		-	
Noževi za kresanje		-	
Uređaj za posmak		-	
Posmična brzina		-	
Mjerni uređaj			
Gusjenice		-	
Masa harvesterske glave		-	
Duljina	Širina	Visina	
11050 mm		2910 mm	3810 mm
Radijus okretanja			
Clearance		650 mm	
Net masa		21700 kg	
Cijena		€	

GEMO

GREMO AB
Box 44
S-31061 Ätran
Švedska
Tel.: 0046(0)346/60515
Fax: 0046(0)346/60342
E-mail: info@gremo.se
Internet: www.gremo.com



TEHNIČKI DETALJI

Tip	Articulated Joint 8 wheels Harvester with bogie axle		
Motor	CUMMINS QSB, watercooled 6-cylinder-Common Rail-Turbodiesel with Intercooler,		
Snaga	160 kW		
Transmisija	Hydrostatic-mech. power transmission with two-tier powershift gear box. Manual shiftable differential lock front and rear, tractive power 125kN		
Hidraulični sistem	Load sensing/permanent pressure System. Pump with 190 cm ³ ; pressure: 240 bar		
Hidraulični spremnik	200 Litara		
Spremnik za gorivo	330 Litara		
Spojka	-		
Mjenjač	-		
Upravljanje	Power-assisted steering. Electrical proportional terrain steering		
Kočnice	4 multi-disc brakes in oil bath in front and rear differential. Emergency break through multi-disc brakes		
Gume (gusjenice)	Front and rear: 600/50 - 22.5		
Dizalica	Tip	LOGLIFT L181 V100	
	Doseg	10 m	
	Moment	138 kNm	
Harvesterska glava	SP 551 LF III		
Max. sječni promjer	600 mm		
Max. promjer kresanja	430 mm		
Noževi za kresanje	1 fixed and 4 moving delimbing knives		
Uređaj za posmak	4 hydrst. Steel rollers		
Posmična brzina	5,0 m/s		
Mjerni uređaj	DASA 4 with colour screen, keyboard and canbus communication, GPS available		
Gusjenice	-		
Masa harvesterske glave	990 kg		
Duljina	Širina	Visina	
	7599 mm	2600 mm	3455 mm
Radius okretanja	7,5 m		
Clearance	560 mm		
Net masa	14700 kg		
Cijena	€		

HIGHLANDER

KONRAD Forsttechnik GmbH
 Oberpreitenegg 52
 A-9451 Preitenegg
 Austrija
 Tel.: +43(0)4354/2432
 E-mail: office@forsttechnik.at
 Internet: www.forsttechnik.at



TEHNIČKI DETALJI				
Tip		4/6-wheel Harvester with synchroal drive and walking movement. Hydraulic bundler and 15t winch		
Motor		IVECO, watercooled 6-cylinder Turbo-Diesellengine with fuel-injection		
Snaga		200 kW		
Transmisija		Hydr. 2-speed drive, shiftable differential lock. Tractive power 300 kN		
Hidraulični sistem		Separated System for drive and tools		
Hidraulični spremnik		350 Litara		
Spremnik za gorivo		380 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Articulated frame steering		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear 6WD: 700/70 - 34; 4x 710/45 R26,5		
Dizalica	Tip		Konrad HL2400	
	Doseg		10,5 m	
	Moment		240 kNm	
Harvesterska glava		WOODY 60 H		
Max. sječni promjer		650 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		4 hydrst. rubber rollers		
Posmična brzina		3,0 m/s		
Mjerni uređaj		KONRAD MC 3.0 linear measurmrnt via actile wheel, PC with display and mouse programable		
Gusjenice		-		
Masa harvesterske glave		1350 kg		
Duljina	Širina	Visina	10500 mm	2950 mm
Radijus okretanja		7,0 m		
Clearance		1700 mm		
Net masa		20000 kg		
Cijena		330000€		

HSM 405 H1 8WD

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI				
Tip		Articulated steered, 8-wheel Harvester with NAF bogie axle and tiltable cabin		
Motor		IVECO 6-cylinder Common Rail-Turbo Diesel/ TIER3		
Snaga		175 kW		
Transmisija		Hydrost.-mech. drive with elect.control. NAF 2-gear transfer box gearing. Shiftble differential lock. Tractive power 140 kN		
Hidraulični sistem		Multi-Loop hydr.system for drive, aggregate and brake. Load Sensing System, 266 l/min/ 1400 r/pm		
Hidraulični spremnik		240 Litara		
Spremnik za gorivo		550 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydr. articulated´frame steering with hydr. distortion stop, steering angle: 52°		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear: 700/45 - 22.5		
Dizalica		Tip	Loglift L 181 V100	
		Doseg	10 m	
		Moment	138 kNm	
Harvesterska glava		CTL 453 (OPTIONAL: Waratah or other producters)		
Max. sječni promjer		530 mm		
Max. promjer kresanja		450 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		3 hydrst. steel rolls, feed: 20 kN		
Posmična brzina		4,5 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		-		
Masa harvesterske glave		650 kg		
Duljina	Širina	Visina	7780 mm	2700 mm3720 mm
Radijus okretanja				
Clearance		645 mm		
Net masa		18000 kg		
Cijena		426300€		

HSM 405 H2 8WD

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI				
Tip		Articulated steered, 8-wheel Harvester with NAF bogie axle and HSM tiltable and revolvable cabin.		
Motor		IVECO 6-cylinder Common Rail-Turbo Diesel/ TIER3		
Snaga		175 kW		
Transmisija		Hydrost.-mech. drive with elect.control. NAF 2-gear transfer box gearing. Shiftble differential lock. Tractive power 140 kN		
Hidraulični sistem		Multi-Loop hydr.system for drive, aggregate and brake. Load Sensing System, 469 l/min 1400 r/pm		
Hidraulični spremnik		240 Litara		
Spremnik za gorivo		550 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydr. articulated´frame steering with hydr. distortion stop, steering angle: 52°		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear: 710/45 - 26.5		
Dizalica		Tip	Loglift L 220 V100	
		Doseg	10 m	
		Moment	188 kNm	
Harvesterska glava		WARATAH H 480, optional: other producer		
Max. sječni promjer		710 mm		
Max. promjer kresanja		680 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		3 hydrst. steel rolls, feed: 30.2 kN		
Posmična brzina		5,0 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		-		
Masa harvesterske glave		1250 kg		
Duljina	Širina	Visina	7970 mm	2860 mm3750 mm
Radijus okretanja				
Clearance		675 mm		
Net masa		19500 kg		
Cijena		473500€		

HSM 405 H2L 8WD Steilhang

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI					
Tip		Articulated steered, 8-wheel Harvester with NAF bogie axle and HSM tiltable and revolvable cabin (+/- 11°)			
Motor		IVECO 6-cylinder Common Rail-Turbo Diesel/ TIER3			
Snaga		175 kW			
Transmisija		Hydrost.-mech. drive with elect.control. NAF 2-gear transfer box gearing. Shiftble differential lock. Tractive power 200 kN			
Hidraulični sistem		Multi-Loop hydr.system for drive, aggregate and brake. Load Sensing System, 469 l/min 1400 r/pm			
Hidraulični spremnik		240 Litara			
Spremnik za gorivo		550 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydr. articulated frame steering with hydr. distortion stop, steering angle: 52°			
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake			
Gume (gusjenice)		Front and rear: 710/45 - 26.5			
Dizalica		Tip	Loglift L 220 V100		
		Doseg	10 m		
		Moment	188 kNm		
Harvesterska glava		WARATAH H 480, optional: other producer			
Max. sječni promjer		710 mm			
Max. promjer kresanja		680 mm			
Noževi za kresanje		1 fixed and 4 moving delimbing knives			
Uređaj za posmak		3 hydrst. steel rolls, feed: 30.2 kN			
Posmična brzina		5,0 m/s			
Mjerni uređaj		MOTOMIT IT			
Gusjenice		-			
Masa harvesterske glave		1250 kg			
Duljina	Širina	Visina	8370 mm	2860 mm	3750 mm
Radijus okretanja					
Clearance		675 mm			
Net masa		21500 kg			
Cijena		517200€			

HSM 405 H3 8WD

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI				
Tip		Articulated steered, 8-wheel Harvester with NAF bogie axle and HSM tiltable and revolvable cabin		
Motor		IVECO 6-cylinder Common Rail-Turbo Diesel/ TIER3		
Snaga		175 kW		
Transmisija		Hydrost.-mech. drive with elect.control. NAF 2-gear transfer box gearing. Shiftble differential lock. Tractive power 195 kN		
Hidraulični sistem		Multi-Loop hydr.system for drive, aggregate and brake. Load Sensing System, 530l/min 1400 r/pm		
Hidraulični spremnik		240 Litara		
Spremnik za gorivo		460 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydr. articulated´frame steering with hydr. distortion stop, steering angle: 52°		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear: 710/45 - 26.5		
Dizalica		Tip	Loglift L 220 V110	
		Doseg	11 m	
		Moment	280 kNm	
Harvesterska glava		WARATAH H 480, optional: other producer		
Max. sječni promjer		710 mm		
Max. promjer kresanja		680 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		3 hydrst. steel rolls, feed: 30.2 kN		
Posmična brzina		5,0 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		-		
Masa harvesterske glave		1250 kg		
Duljina	Širina	Visina	8380 mm	3000 mm3720 mm
Radijus okretanja				
Clearance		675 mm		
Net masa		23000 kg		
Cijena		515900€		

IMPEX KÖNIGSTIGER T 25

IMPEX Forstmaschinen GmbH.
 Agendorfer Straße 13
 D-94327 Bogen/Furth
 Deutschland
 Tel.: +49(0)9422/4018715
<http://www.impex-forstmaschinen.de/>



TEHNIČKI DETALJI				
Tip		Harvester with crawler Chassis and tilttable upper structure. Levelling unit 27° Forward, 6° sideways and 6° backwards		
Motor		Doosan DL06, watercooled 6-cylinder-Diesel-engine		
Snaga		126 kW		
Transmisija		Hydrost. 2-gear drive. Tractive power: 335 kN		
Hidraulični sistem		Multi-Loop hydr. System for drive and Tools. Pump: 520 l/min		
Hidraulični spremnik		130 Litara		
Spremnik za gorivo		320 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydr. via planetary gear		
Kočnice		Hydr. operated brakes		
Gume (gusjenice)		-		
Dizalica	Tip		Telescopic crane	
	Doseg		15 m	
	Moment		*Lifting power 3t	
Harvesterska glava		LAKO Implex VV 675 ili 786		
Max. sječni promjer		630 mm		
Max. promjer kresanja		560 mm		
Noževi za kresanje		1 fixed and 3 moving delimbing knives		
Uređaj za posmak		3 hydrst. steel rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		Steel tracklaying gear, track width: 600 - 1300 mm, symmetric		
Masa harvesterske glave		1200 kg		
Duljina	Širina	Visina	13900 mm	4500 mm3780 mm
Radijus okretanja				
Clearance		600 mm		
Net masa		28000 kg		
Cijena		450000€		

IMPEX KÖNIGSTIGER T 30 und T30 Gigant

IMPEX Forstmaschinen GmbH.
 Agendorfer Straße 13
 D-94327 Bogen/Furth
 Deutschland
 Tel.: +49(0)9422/4018715
<http://www.impex-forstmaschinen.de/>



TEHNIČKI DETALJI					
Tip		Harvester with crawler Chassis and tiltable upper structure. Levelling unit 25° Forward, 12° sideways and 6° backwards			
Motor		DEUTZ Typ TCD 2013 L06 2V, watercooled 6-cylinder-Diesel-engine			
Snaga		180 kW			
Transmisija		Hydrost. 2-gear drive. Tractive power: 335 kN			
Hidraulični sistem		Multi-Loop hydr. System for drive and Tools. Pump: 610 l/min			
Hidraulični spremnik		430 Litara			
Spremnik za gorivo		380 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		-			
Kočnice		Hydr. operated breakes			
Gume (gusjenice)		-			
Dizalica		Tip	Telescopic crane		
		Doseg	15 m		
		Moment	*Lifting power 4t		
Harvesterska glava		LAKO Implex VV 897 ili 1118			
Max. sječni promjer		790 mm			
Max. promjer kresanja		750 mm			
Noževi za kresanje		1 fixed and 3 moving delimbing knives			
Uređaj za posmak		2 hydrst. steel rolls			
Posmična brzina		5,0 m/s			
Mjerni uređaj		MOTOMIT IT			
Gusjenice		Steel tracklaying gear, track width: 600 - 900 mm, symmetric			
Masa harvesterske glave		1750 kg			
Duljina	Širina	Visina	11100 mm	3000 mm	3400 mm
Radijus okretanja					
Clearance		600 mm			
Net masa		32000 kg			
Cijena		585000€			

IMPEX MINI KÖNIGSTIGER

IMPEX Forstmaschinen GmbH.
 Agendorfer Straße 13
 D-94327 Bogen/Furth
 Deutschland
 Tel.: +49(0)9422/4018715
<http://www.impex-forstmaschinen.de/>



TEHNIČKI DETALJI

TEHNIČKI DETALJI				
Tip		Harvester with crawler Chassis and tiltable upper structure. Levelling unit 25° Forward, 6° sideways and 7° backwards		
Motor		PERKINS Typ 3PKX L04 4RS1, oil-watercooled 4-cylinder-Diesel-engine		
Snaga		98 kW		
Transmisija		Hydrost. 2-gear drive. Tractive power: 270 kN		
Hidraulični sistem		Multi-Loop hydr. System for drive and Tools. Pump: 300 l/min		
Hidraulični spremnik		200 Litara		
Spremnik za gorivo		350 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydr. via planetary gear		
Kočnice		Hydr. operated breakes		
Gume (gusjenice)		-		
Dizalica		Tip	Telescopic crane	
		Doseg	13,5 m	
		Moment		
Harvesterska glava		LAKO 43 Impex VV 564		
Max. sječni promjer		510 mm		
Max. promjer kresanja		430 mm		
Noževi za kresanje		1 fixed and 3 moving delimbing knives		
Uređaj za posmak		3 hydrst. steel rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		Steel tracklaying drive, track width: 600 mm		
Masa harvesterske glave		750 kg		
Duljina	Širina	Visina	8900 mm	2800 mm
Radijus okretanja		3300 mm		
Clearance		500 mm		
Net masa		17500 kg		
Cijena		311000€		

JOHN DEERE 1070D Eco III

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI					
Tip		Articulated Joint 6 wheels Harvester with front bogie axle and rear live axle			
Motor		JOHN DEERE Typ 6068 watercooled 6-cylinder-Diese engine with charge air cooling			
Snaga		136 kW			
Transmisija		Hydrostatic-mechanical power Transmission 2- gear, hydromech. differential lock tractive power 130kN			
Hidraulični sistem		Load sensing hydrostatic System; Pump capacity: 145 cm³			
Hidraulični spremnik		170 Litara			
Spremnik za gorivo		300 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydr. articulated frame steering			
Kočnice		System brake: hydr. multi-disc Brakes in oil bath. Fixing/emergency brake: spring-loaded brake			
Gume (gusjenice)		Front: 600/50 - 22.5, rear: 650/65 - 26.5			
Dizalica		Tip	JOHN DEERE 180S parallel boom		
		Doseg	8,6 – 10 – 11,3 m		
		Moment	143 kNm		
Harvesterska glava		JOHN DEERE 745			
Max. sječni promjer		550 mm			
Max. promjer kresanja		400 mm			
Noževi za kresanje		1 fixed and 3 moving delimbing knives			
Uređaj za posmak		4 hydrst. rubber roller			
Posmična brzina		5,0 m/s			
Mjerni uređaj		Integrated Timbermatic 300 Bordcomputer System. PC with colour display for programming and colour printer			
Gusjenice		-			
Masa harvesterske glave		780 kg			
Duljina	Širina	Visina	6750 mm	2640 mm	3620 mm
Radijus okretanja					
Clearance		575 mm			
Net masa		14200 kg			
Cijena		296000€			

JOHN DEERE 1070E

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI				
Tip		Articulated Joint 4/6 wheels Harvester with front bogie axle and rear live axle		
Motor		JOHN DEERE Typ watercooled 6-cylinder-Diese engine		
Snaga		136 kW		
Transmisija		Hydrostatic-mechanical power Transmission 2- gear, tractive power 130kN		
Hidraulični sistem		Load sensing hydrostaticsystem with permanent pressure		
Hidraulični spremnik		-		
Spremnik za gorivo		320 Litara		
Spojka		-		
Mjenjač		Hydrostatic-mechanical power Transmission 2- gear, tractive power 130kN		
Upravljanje		Proportional articulated steering		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front: 710 22.5-16, rear: 34 -14/26,5-12 / 26,5-20		
Dizalica		Tip	TIMBERJACK 180 S parallel boom	
		Doseg	8,6 – 10 – 11,3 m	
		Moment	143 kNm	
Harvesterska glava		H752HD, H754, H412, H414		
Max. sječni promjer		470 mm		
Max. promjer kresanja		400 mm		
Noževi za kresanje		1 fixed and 3 moving delimbing knives		
Uređaj za posmak		4 hydrst. rubber roller		
Posmična brzina		5,0 m/s		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		930 kg		
Duljina	Širina	Visina	6820 mm	2800 mm3620 mm
Radijus okretanja				
Clearance		575 mm		
Net masa		15750 kg		
Cijena		345000€		

JOHN DEERE 1170E

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI				
Tip		Articulated Joint 6 wheels Harvester with front bogie axle and rear live axle		
Motor		JOHN DEERE 6068 PowerTech Plus with turbocharger and intercooler, 6 cylinders, displacement 6.8L		
Snaga		145 kW		
Transmisija		Hydrostatic-mechanical power transmission 2- gears, Hydromechanical differential lock front and rear. Max. tractive power 150 kN		
Hidraulični sistem		Load sensing hydrostaticsystem with permanent pressure; capacity: 0-160 cm³/r		
Hidraulični spremnik		-		
Spremnik za gorivo		320 Litara		
Spojka		Hydrostatic		
Mjenjač		Hydrostatic-mechanical power Transmission 2- gear		
Upravljanje		Hydrostatic articulated steering		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front: 710 24.5-20, rear: 34 -15		
Dizalica		Tip	JOHN DEERE CH6	
		Doseg	10/11,3 m	
		Moment	165 kNm	
Harvesterska glava		John Deere H752 ILI H754, H412, H414		
Max. sječni promjer		570 mm		
Max. promjer kresanja		400 mm		
Noževi za kresanje		2 fixed and 4 moving delimbing knives		
Uređaj za posmak		4 hydrst. steel rollers		
Posmična brzina		5,0 m/s		
Mjerni uređaj		TIMBERMATIC H-09 OS integrating control-units and TMC functions. PC with colour touchscreen and A4 colour printer included		
Gusjenice		-		
Masa harvesterske glave		950 kg		
Duljina	Širina	Visina	7080 mm	2820 mm
Radijus okretanja				
Clearance		635 mm		
Net masa		17800 kg		
Cijena		390000€		

JOHN DEERE 1270E IT4 6w

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI				
Tip		Articulated Joint 6 wheels Harvester with front bogie axle and rear live axle		
Motor		JOHN DEERE Typ 6090 PowerTech Plus watercooled 6-cylinder-Diesel engine, charge air intercooler		
Snaga		170 kW		
Transmisija		Hydrostatic-mechanical power transmission 2- gears, hydrost. differential lock (front and rear); tractive power 175 kN		
Hidraulični sistem		Load sensing hydrostaticsystem with permanent pressure; capacity: 190 cm³		
Hidraulični spremnik		-		
Spremnik za gorivo		435 Litara		
Spojka		-		
Mjenjač		Hydrostatic-mechanical power Transmission 2- gear		
Upravljanje		Hydrostatic articulated steering		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front: 710 26.5 - 20, rear: 34 – 14		
Dizalica		Tip	JOHN DEERE CH7 parallel boom	
		Doseg	8,6/10/11,3 m	
		Moment	197 kNm	
Harvesterska glava		John Deere H752HD, H754, H414, H270 I H4800C		
Max. sječni promjer		710 mm		
Max. promjer kresanja		460 mm		
Noževi za kresanje		2 fixed and 4 moving delimbing knives		
Uređaj za posmak		2 hydrst. rubber rollers		
Posmična brzina		4,9 m/s		
Mjerni uređaj		TIMBERMATIC H-09 OS integrating control-units and TMC functions. PC with colour touchscreen and A4 colour printer included		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	7550 mm	2770 mm
Radijus okretanja		-		
Clearance		625 mm		
Net masa		20500 kg		
Cijena		440000€		

JOHN DEERE 1270E IT4 8w

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI				
Tip		Articulated Joint 8 wheels Harvester with front bogie axle and rear live axle		
Motor		John Deere 6090 PowerTech Plus with turbocharger and intercooler, 6 cylinders, displacement 9		
Snaga		190 Kw		
Transmisija		-		
Hidraulični sistem		-		
Hidraulični spremnik		300 Litara		
Spremnik za gorivo		-		
Spojka		-		
Mjenjač		-		
Upravljanje		-		
Kočnice				
Gume (gusjenice)		-		
Dizalica		Tip	JOHN DEERE CH7 parallel boom	
		Doseg	8,6/10/11,3 m	
		Moment	197 kNm	
Harvesterska glava		H4800C		
Max. sječni promjer		710 mm		
Max. promjer kresanja		460 mm		
Noževi za kresanje		2 fixed and 4 moving delimbing knives		
Uređaj za posmak		4WD with 4 Moipu feed rollers		
Posmična brzina		5,0 m/s		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	7927 mm	2750 mm3880 mm
Radijus okretanja				
Clearance		715 mm		
Net masa		22800 kg		
Cijena		475000€		

KAISER FORST S2 4 X 4 Cross

KAISER AG Fahrzeugwerk
Vorarlbergerstraße 220
FL-9486 Schaanwald
Liechtenstein
Tel.: +423-3772121
E-mail: kaiserag@kaiser.li
Internet: www.kaiser.li



TEHNIČKI DETALJI			
Tip		All-wheel walking-drive Harvester	
Motor		PERKINS 1104D-E44TA, watercooled 4-Zylinder-Common Rail-Turbodiesel.	
Snaga		117 kW	
Transmisija		Hydr. with separated pump. Drive and tools functional together	
Hidraulični sistem		Load-sensing system with piston pump, Pressure: 300 bar, 190 l/min	
Hidraulični spremnik		200 Litara	
Spremnik za gorivo		396 Litara	
Spojka		-	
Mjenjač		-	
Upravljanje		Hydrost. On all 4 wheels	
Kočnice		System brake: Multi-disc brake in oil bath	
Gume (gusjenice)		Front and rear: 500/60 – 22.5	
Dizalica	Tip		Telescopic crane
	Doseg		8,5 m
	Moment		16 kNm
Harvesterska glava		WOODY 50 H	
Max. sječni promjer		550 mm	
Max. promjer kresanja		500 mm	
Noževi za kresanje		2 fixed and 4 moving delimbing knives	
Uređaj za posmak		2 hydrost. Rubber rolls	
Posmična brzina		4,0 m/s	
Mjerni uređaj		KONRAD MSC 2.2 Data collection via photocell,measuring wheel. Computer with display and printer	
Gusjenice		-	
Masa harvesterske glave		980 kg	
Duljina	Širina	Visina	
6660 mm		2440 mm	2530 mm
Radijus okretanja			
Clearance		190 mm	
Net masa		10500 kg	
Cijena		€	

Komatsu 901TX.1 4/6 - Rad

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI					
Tip		Articulated joint 4/6-wheel Harvester			
Motor		66-AWI. 6-cylinder, Turbo mit Common-Rail. EU Stage IIIB und EPA Tier 4 Interim			
Snaga		150 kW			
Transmisija		Hydrost.-mech. Operation with MaxiXplorer, transfer box gearing. Disengageable front drive; tractive power 128 kN			
Hidraulični sistem		Multii-loop System for crane, drive and aggregate			
Hidraulični spremnik		200 Litara			
Spremnik za gorivo		370 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydrost. Articulated joint steering			
Kočnice		Hydr. multi-disc Brakes. Hydr. accumulator valve charging			
Gume (gusjenice)		4WD front/rear600/65 x 34; 710/55 x 34; 6WD rear 600/65 x 34; 710/55 x 34; 6WD front 650/45 x 24,5; 710/40 x 24,5			
Dizalica		Tip	Optional: CRH16		
		Doseg	10 m		
		Moment	174 kNm; slewing torque: 40,8 kNm		
Harvesterska glava		Aggregat: 350.1			
Max. sječni promjer		600 mm			
Max. promjer kresanja		-			
Noževi za kresanje		-			
Uređaj za posmak		Steel rolls			
Posmična brzina		5,0 m/s			
Mjerni uređaj		-			
Gusjenice		-			
Masa harvesterske glave		960 kg			
Duljina	Širina	Visina	7065 mm	2900 mm	3740 mm
Radijus okretanja					
Clearance					
Net masa		16800 kg			
Cijena		€			

Komatsu 911.5 4/6 - Rad

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI					
Tip		Articulated joint 4/6-wheel Harvester			
Motor		74-AWI. 6-Zylinder, Turbo Common-Rail. EU Stage IIIB und EPA Tier 4			
Snaga		130 kW			
Transmisija		Hydrost.-mech. Operation with MaxiXplorer, transfer box gearing. Disengageable front drive			
Hidraulični sistem		Load-sensing constant pressure system with piston pump			
Hidraulični spremnik		200 Litara			
Spremnik za gorivo		370 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydrost. Articulated joint steering			
Kočnice		Hydr. multi-disc Brakes. Hydr. accumulator valve charging			
Gume (gusjenice)		4WD front/rear600/65 x 34; 710/55 x 34; 6WD rear 600/65 x 34; 710/55 x 34; 6WD front 650/45 x 24,5; 710/40 x 24,5			
Dizalica		Tip	Optional: CRH16		
		Doseg	10 m		
		Moment			
Harvesterska glava		Kamatsu 365			
Max. sječni promjer		650 mm			
Max. promjer kresanja		575 mm			
Noževi za kresanje		-			
Uređaj za posmak		-			
Posmična brzina		5,0 m/s			
Mjerni uređaj		-			
Gusjenice		-			
Masa harvesterske glave		1250 kg			
Duljina	Širina	Visina	7170 mm	2960 mm	3740 mm
Radijus okretanja		14 m			
Clearance		650 mm			
Net masa		17900 kg			
Cijena		45000€			

Komatsu 931

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI						
Tip		Articulated joint 6-wheel Harvester built for use in highly demanding harvesting areas				
Motor		AGCO 74 -AWF, EPA Tier 4 Final und EU Stage IV				
Snaga		185 kW				
Transmisija		6-cylinder turbo diesel engine with intercooler				
Hidraulični sistem		Load sensing dual-circuit system with variable piston Pumps				
Hidraulični spremnik		220 Litara				
Spremnik za gorivo		405 Litara				
Spojka		-				
Mjenjač		Hydrostatic-mechanical, controlled with Maxi Explorer. Transfer gearbox with 2 Translations. Switchable Front wheel drive				
Upravljanje		Hydraulic articulated steering with two double-acting hydraulic cylinders				
Kočnice		Single circuit, fully hydraulic multi-disc brakes.				
Gume (gusjenice)		Front: 600 / 55x26,5 Rear: 600/65 x 34				
Dizalica	Tip		230 H			
	Doseg		8,7/ 10/ 11 m			
	Moment		229 kNm; torque: 47,5 kNm			
Harvesterska glava		Kamatsu S92/ C93 / 360.2/ 365.1/ C144/ 370.2/ S132				
Max. sječni promjer		720 mm				
Max. promjer kresanja		655 mm				
Noževi za kresanje		-				
Uređaj za posmak		-				
Posmična brzina		5,0 m/s				
Mjerni uređaj		-				
Gusjenice		-				
Masa harvesterske glave		1345 kg				
Duljina	Širina	Visina	7550 mm		2730 mm	3930 mm
Radijus okretanja						
Clearance		650 mm				
Net masa		19600 kg				
Cijena		48000€				

Komatsu 931.1

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI				
Tip		Articulated joint 6-wheel Harvester front-axle: bogie axle, mech. differential lock. Rear-axle: pendulum axle with hub gear		
Motor		VALMET 634 DWBIE, watercooled 6-cylinder-Turbo-WASTEGATE-Diesel engine. Biodiesel ready		
Snaga		155 kW		
Transmisija		74 –AWI. 6-cylinder, Turbo mit Common-Rail. EU Stage IIIB und EPA Tier 4 Interim		
Hidraulični sistem		Load sensing dual-circuit system with variable piston Pumps		
Hidraulični spremnik		200 Litara		
Spremnik za gorivo		370 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydraulic articulated steering		
Kočnice		Hydr. multi-disc Brakes. Hydr. accumulator valve charging		
Gume (gusjenice)		6WD (front) 600/55 x 26,5; 710/45 x 26,5 6WD (rear) 600/65 x 34; 710/55 x 34		
Dizalica		Tip	CRH 22	
		Doseg	10 m	
		Moment		
Harvesterska glava		Komatsu 370.2		
Max. sječni promjer		700 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		-		
Uređaj za posmak		Rubber rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		1470 kg		
Duljina	Širina	Visina	7300 mm - mm 3910 mm	
Radijus okretanja				
Clearance		- mm		
Net masa		19400 kg		
Cijena		- €		

Komatsu 941.1

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI

Tip	Articulated joint 6-wheel Harvester; front-axle: bogie axle, mech. differential lock. Rear-axle: pendulum axle with hub gear Automatic levelling unit for the cabin		
Motor	84 CTA. 6-cylinder, Turbo mit Commonrail, tire 3		
Snaga	210 kW		
Transmisija	Hydrost.-mech. Operation with MaxiXplorer, transfer box gearing. Disengageable front drive		
Hidraulični sistem	Load sensing dual-circuit system with variable piston Pumps		
Hidraulični spremnik	235 Litara		
Spremnik za gorivo	550 Litara		
Spojka	-		
Mjenjač	-		
Upravljanje	Hydraulic articulated steering		
Kočnice	Hydr. multi-disc Brakes. Hydr. accumulator valve charging		
Gume (gusjenice)	Front: 650/65 - 26,5, rear: 700/70 – 34		
Dizalica	Tip	CRH 24	
	Doseg	10 m	
	Moment		
Harvesterska glava	Komatsu 370E		
Max. sječni promjer	700 mm		
Max. promjer kresanja	600 mm		
Noževi za kresanje	-		
Uređaj za posmak	-		
Posmična brzina	5,0 m/s		
Mjerni uređaj	-		
Gusjenice	-		
Masa harvesterske glave	1600 kg		
Duljina	Širina	Visina	
	7075 mm	2990 mm	3920 mm
Radijus okretanja	-		
Clearance	- mm		
Net masa	23500 kg		
Cijena	- €		

LOGSET 5H GT

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.com



TEHNIČKI DETALJI				
Tip		Articulated Joint 6 wheels Harvester with front bogie axle and planetary axle at rear		
Motor		SISU 49 CWA, watercooled 4-cyl. elec. fuel injection Diesel engine		
Snaga		125 kW		
Transmisija		Hydr,-mech. 2-gear drive, Hydr. shiftable differential lock 100%, tractive power: 135 kN		
Hidraulični sistem		Multi-Loop hydr. System for drive and Tools. Pump capacity 160l/1000 U/min		
Hidraulični spremnik		200 Litara		
Spremnik za gorivo		500 Litara		
Spojka		-		
Mjenjač		2 gear		
Upravljanje		Hydraulic articulated steering		
Kočnice		Hydr. multi-disc (emergency) break		
Gume (gusjenice)		Front: 710/40-22.5 , rear: 700/55-34		
Dizalica	Tip		LOGLIFT L 181 V tiltable barallel boom	
	Doseg		8,3 – 11 m	
	Moment		138 kNm	
Harvesterska glava		TH45, TH55, TH 65		
Max. sječni promjer		-		
Max. promjer kresanja		-		
Noževi za kresanje		-		
Uređaj za posmak		-		
Posmična brzina		-		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	6940mm	2680 mm3860 mm
Radijus okretanja		12 m		
Clearance		575 mm		
Net masa		14000 kg		
Cijena		- €		

LOGSET 8H GT

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.com



TEHNIČKI DETALJI				
Tip		Articulated Joint 6 wheels Harvester with front bogie axle and planetary axle at rear		
Motor		SISU 74 AWI, watercooled 6-cyl. elec. fuel injection Diesel engine		
Snaga		205 kW		
Transmisija		Hydr,-mech. 2-gear drive, Hydr. shiftable differential lock 100%, tractive power: 169 kN		
Hidraulični sistem		Multi-Loop hydr. System for drive and Tools. Pump capacity:190l/1000 rpm		
Hidraulični spremnik		280 Litara		
Spremnik za gorivo		520 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydraulic articulated steering		
Kočnice		Hydr. multi-disc (emergency) break		
Gume (gusjenice)		Front: 710/45-26.5 , rear: 700/55-34		
Dizalica	Tip		LOGLIFT L 220 V tiltable barallel boom	
	Doseg		10 m	
	Moment		188 kNm	
Harvesterska glava		LOGSET 7L; OPTIONAL: TH65, TH75		
Max. sječni promjer		650 mm		
Max. promjer kresanja		550 mm		
Noževi za kresanje		2 fixed and 4 moving delimbing knives		
Uređaj za posmak		2 hydrs. bogie mounted drive belt; optional: 3 drive rollers		
Posmična brzina		4,4 m/s		
Mjerni uređaj		MOTOMIT IT or MOTOMIT PC, GPS ready		
Gusjenice		-		
Masa harvesterske glave		1300 kg		
Duljina	Širina	Visina	7200 mm	2930 mm3700 mm
Radijus okretanja		12 m		
Clearance		630 mm		
Net masa		18000 kg		
Cijena		- €		

MENZI MUCK A111

MENZI MUCK
Auenstraße 7
CH-9443 Widnau
Švicarska
Tel.: +41(0)71727 1212
E-mail: info@menzimuck.com
Internet: www.menzimuck.com



TEHNIČKI DETALJI			
Tip		Articulated Joint 6 wheels Harvester with front bogie axle and planetary axle at rear	
Motor		JOHN DEERE 4045 HF 275, watercooled 4-cylinder Common Rail-Turbodiesel, charge air cooling. TIER 3	
Snaga		105 kW	
Transmisija		Hydrost. 2-gear drive and additional walking legs. Tractive power: 80 Kn	
Hidraulični sistem		Elec. load sensing 3-circuit hydr. System for drive, tools and harvester-head	
Hidraulični spremnik		200 Litara	
Spremnik za gorivo		330 Litara	
Spojka		-	
Mjenjač		-	
Upravljanje		Articulated steering	
Kočnice		System brake: Hydrost. on every wheel; fixing brake: spring operated multi-disc brake in oil bath	
Gume (gusjenice)		Front and rear: 600/55 - 26,5	
Dizalica	Tip		Telescopic crane
	Doseg		9 m
	Moment		*min. Lifting power 1,9t
Harvesterska glava		WOODY 52 H	
Max. sječni promjer		550 mm	
Max. promjer kresanja		500 mm	
Noževi za kresanje		2 fixed and 4 moving delimbing knives	
Uređaj za posmak		2 hydrs. Rubber rolls	
Posmična brzina		4,0 m/s	
Mjerni uređaj		KONRAD MC 3.0 linear measurement via actile wheel, photocell and PC with display and printer	
Gusjenice		-	
Masa harvesterske glave		1350 kg	
Duljina	Širina	Visina	
5610 mm	2445 mm	2753 mm	
Radijus okretanja		M	
Clearance		1640 mm	
Net masa		13100 kg	
Cijena		- €	

MENZI MUCK A91E

MENZI MUCK
Auenstraße 7
CH-9443 Widnau
Švicarska
Tel.: +41(0)71727 1212
E-mail: info@menzimuck.com
Internet: www.menzimuck.com



TEHNIČKI DETALJI				
Tip		Harvester with drive and walking movement. All-wheel drive, for very steep slopes.		
Motor		JOHN DEERE 4045 HF 275, watercooled 4-cylinder Common Rail-Turbodiesel, charge air cooling. TIER 3		
Snaga		104 kW		
Transmisija		Hydrost. 2-gear drive and additional walking legs. Tractive power: 80 Kn		
Hidraulični sistem		Elec. load sensing 3-circuit hydr. System for drive, tools and harvester-head		
Hidraulični spremnik		200 Litara		
Spremnik za gorivo		330 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. Kingpin steering		
Kočnice		System brake: Hydrost. on every wheel; fixing brake: spring operated multi-disc brake in oil bath		
Gume (gusjenice)		Front and rear: 600/55 - 26,5		
Dizalica		Tip	Telescopic crane	
		Doseg	9 m	
		Moment	*min. Lifting power 1,9t	
Harvesterska glava		WOODY 52 H		
Max. sječni promjer		550 mm		
Max. promjer kresanja		500 mm		
Noževi za kresanje		2 fixed and 4 moving delimbing knives		
Uređaj za posmak		2 hydrs. Rubber rolls		
Posmična brzina		4,0 m/s		
Mjerni uređaj		KONRAD MC 3.0 linear measurement via actile wheel, photocell and PC with display and printer		
Gusjenice		-		
Masa harvesterske glave		1350 kg		
Duljina	Širina	Visina	5700 mm	2330 mm2570 mm
Radijus okretanja		M		
Clearance		1600 mm		
Net masa		12400 kg		
Cijena		300000 €		

NEUSON 103 HVT

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Anselden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI				
Tip		Harvester on tracks		
Motor		John Deere 4045		
Snaga		85 kW		
Transmisija		-		
Hidraulični sistem		-		
Hidraulični spremnik		-		
Spremnik za gorivo		-		
Spojka		-		
Mjenjač		-		
Upravljanje		-		
Kočnice		-		
Gume (gusjenice)		3.370 x 500		
Dizalica	Tip		Neuson Ecotec Long crane Range	
	Doseg		10 m	
	Moment			
Harvesterska glava		Logmax 4000		
Max. sječni promjer		-		
Max. promjer kresanja		-		
Noževi za kresanje		-		
Uređaj za posmak		-		
Posmična brzina		-		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	7100 mm	2550 mm3400 mm
Radijus okretanja		M		
Clearance		520 mm		
Net masa		12800 kg		
Cijena		€		

NEUSON 132 HVT

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Ansfelden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI				
Tip		Harvester with crawler Chassis and tiltable cabin. Levelling unit 25° forward and 15° sideways		
Motor		JOHN DEERE 4045, watercooled 4-cylinder-Turbo-Diesel engine		
Snaga		104 kW		
Transmisija		Hydr. 2-speed drive: 2,1 km/h and 4,6 km/h. Tractive power: 145 kN		
Hidraulični sistem		Load Sensing hydraulicsystem; elec.-hydr. operated System		
Hidraulični spremnik		370 Litara		
Spremnik za gorivo		190 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydr. with pedal		
Kočnice		Automatic parking brake		
Gume (gusjenice)		-		
Dizalica	Tip		WARATAH CH 135 parallel boom	
	Doseg		11 m	
	Moment		125 kNm	
Harvesterska glava		Logmax 5000		
Max. sječni promjer		660 mm		
Max. promjer kresanja		515 mm		
Noževi za kresanje		1 fixed and 3 moving delimbing knives		
Uređaj za posmak		2 hydr. rolls (steel, aluminium or rubber)		
Posmična brzina		5,0 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		Steel chain, track width: 500mm, running gear length 3370 mm, gradient ability: 30°		
Masa harvesterske glave		935 KG		
Duljina	Širina	Visina	3370 mm	2550 mm3400 mm
Radijus okretanja				
Clearance		520 mm		
Net masa		14400 kg		
Cijena		270000 €		

NEUSON 133 HVT

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Ansfelden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI				
Tip		Harvester on tracks		
Motor		JOHN DEERE 4045		
Snaga		106 kW		
Transmisija		-		
Hidraulični sistem		-		
Hidraulični spremnik		-		
Spremnik za gorivo		-		
Spojka		-		
Mjenjač		-		
Upravljanje		-		
Kočnice		-		
Gume (gusjenice)		3.370 x 500		
Dizalica		Tip	Neuson Ecotec Long crane	
		Doseg	10 m	
		Moment		
Harvesterska glava		Logmax 5000		
Max. sječni promjer		-		
Max. promjer kresanja		-		
Noževi za kresanje		-		
Uređaj za posmak		-		
Posmična brzina		-		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	8200 mm	2550 mm3500 mm
Radijus okretanja				
Clearance		520 mm		
Net masa		14500 kg		
Cijena		270000 €		

NEUSON 182 HVT

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Ansfelden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI

Tip	Harvester with crawler Chassis and tiltable cabin. Levelling unit 25° forward and 15° sideways		
Motor	JOHN DEERE 6068 HF285, watercooled 6-cylinder-Turbo-Diesel engine		
Snaga	132 kW		
Transmisija	Hydr. 2-speed drive: 1,6 km/h and 3,1 km/h. Tractive power: 205 kN		
Hidraulični sistem	2 separated Systems with pump for the engine and pump for aggregate		
Hidraulični spremnik	220 Litara		
Spremnik za gorivo	400 Litara		
Spojka	-		
Mjenjač	-		
Upravljanje	Hydr. with pedal		
Kočnice	Automatic parking brake		
Gume (gusjenice)	-		
Dizalica	Tip	WARATAH CH 175 PARALLEL BOOM	
	Doseg	12,5 m	
	Moment	188 kNm	
Harvesterska glava	WARATAH 480		
Max. sječni promjer	650 mm		
Max. promjer kresanja	680 mm		
Noževi za kresanje	1 fixed and 5 moving delimbing knives		
Uređaj za posmak	4 hydr. rolls (steel, Aluminium or rubber)		
Posmična brzina	5,0 m/s		
Mjerni uređaj	TIMBERRIGHT		
Gusjenice	Steel chain, track width: 600mm, running gear length 4045 mm, gradient ability: 30°		
Masa harvesterske glave	1250 kg		
Duljina	Širina	Visina	
	4045 mm	2550 mm	3500 mm
Radijus okretanja			
Clearance	590 mm		
Net masa	20500 kg		
Cijena	340000 €		

NEUSON 242 HVT

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Ansfelden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI

TEHNIČKI DETALJI					
Tip		Harvester with crawler Chassis and tiltable cabin. Levelling unit 25° forward and 15° sideways			
Motor		JOHN DEERE 6081 HF070, watercooled 6-cylinder-Turbo-Diesel engine			
Snaga		168 kW			
Transmisija		Hydr. 2-speed drive: 1,4 km/h and 3,5 km/h.. Tractive power: 225 kN			
Hidraulični sistem		2 separated Systems with pump for the engine and pump for aggregate			
Hidraulični spremnik		390 Litara			
Spremnik za gorivo		650 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydr. with pedal			
Kočnice		Automatic parking brake			
Gume (gusjenice)		-			
Dizalica		Tip	NEUSON P83 parallel boom		
		Doseg	13,5 m		
		Moment	260 kNm		
Harvesterska glava		WARATAH HTH 470 - HD			
Max. sječni promjer		710 mm			
Max. promjer kresanja		680 mm			
Noževi za kresanje		2 fixed and 4 moving delimbing knives			
Uređaj za posmak		2 hydr. rolls			
Posmična brzina		4,7 m/s			
Mjerni uređaj		TIMBERRIGHT			
Gusjenice		Steel chain, track width: 600mm, running gear length 4045 mm, gradient ability: 30°			
Masa harvesterske glave		1080 kg			
Duljina	Širina	Visina	4420 mm	2950 mm	3750 mm
Radijus okretanja					
Clearance		760 mm			
Net masa		24700 kg			
Cijena		390000 €			

NEUSON 242 HV

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Ansfelden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI				
Tip		Harvester with crawler chassis		
Motor		JOHN DEERE 6081 HF070, watercooled 6-cylinder-Turbo-Diesel engine		
Snaga		168 kW		
Transmisija		Hydr. 2-speed drive: 1,4 km/h and 3,5 km/h.. Tractive power: 225 kN		
Hidraulični sistem		2 separated Systems with pump for the engine and pump for aggregate		
Hidraulični spremnik		390 Litara		
Spremnik za gorivo		650 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydr. with pedal		
Kočnice		Automatic parking brake		
Gume (gusjenice)		-		
Dizalica	Tip		NEUSON P83 parallel boom	
	Doseg		13,5 m	
	Moment		260 kNm	
Harvesterska glava		LOGMAX 7000		
Max. sječni promjer		690 mm		
Max. promjer kresanja		700 mm		
Noževi za kresanje		1 fixed and 3 moving delimbing knives		
Uređaj za posmak		2 hydr. rolls (steel, Aluminium or rubber)		
Posmična brzina		5,1 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		Steel chain, track width: 600mm, running gear length 4045 mm, gradient ability: 30°		
Masa harvesterske glave		1640 kg		
Duljina	Širina	Visina	4420 mm	2950 mm
Radijus okretanja		3750 mm		
Clearance		760 mm		
Net masa		24700 kg		
Cijena		370000 €		

NEUSON 243 HVT

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Ansfelden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI				
Tip		Harvester on tracks		
Motor		John Deere 6068		
Snaga		183 kW		
Transmisija		-		
Hidraulični sistem		-		
Hidraulični spremnik		-		
Spremnik za gorivo		-		
Spojka		-		
Mjenjač		-		
Upravljanje		-		
Kočnice		-		
Gume (gusjenice)		4.420 x 600		
Dizalica		Tip	NEUSON ECOTEC Long crane	
		Doseg	14 m	
		Moment		
Harvesterska glava		WARATAH		
Max. sječni promjer		-		
Max. promjer kresanja		-		
Noževi za kresanje		-		
Uređaj za posmak		-		
Posmična brzina		-		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	9200 mm	2950 mm3600 mm
Radijus okretanja				
Clearance		760 mm		
Net masa		24700 kg		
Cijena		€		

NEUSON 9002 HV

NEUSON ECOTEC GmbH
 Actualstraße 32
 4053 Haid/Ansfelden
 Austrija
 Tel.: +43(0)7229/78000-0
 E-mail: office@neuson-ecotec.com
 Internet: www.neuson-ecotec.com



TEHNIČKI DETALJI					
Tip			Harvester with crawler Chassis		
Motor			DEUTZ Typ BF4M2012, watercooled 4-cylinder-Turbo-Dieselmotor		
Snaga			74 kW		
Transmisija			Hydr. 2-speed drive: 2,4 km/h and 4,2 km/h. Tractive power: 91,5 kN		
Hidraulični sistem			Dual-adjustable hydr.pump		
Hidraulični spremnik			120 Litara		
Spremnik za gorivo			170 Litara		
Spojka			-		
Mjenjač			-		
Upravljanje			Hydr. with pedal		
Kočnice			Automatic parking brake		
Gume (gusjenice)			-		
Dizalica			Tip	NEUSON	
			Doseg	9,3 m	
			Moment	141 kNm	
Harvesterska glava			LOGMAX 4000		
Max. sječni promjer			500 mm		
Max. promjer kresanja			400 mm		
Noževi za kresanje			1 fixed and 3 moving delimbing knives		
Uređaj za posmak			2 hydr. rolls (steel, aluminium or rubber)		
Posmična brzina			4,2 m/s		
Mjerni uređaj			MOTOMIT IT		
Gusjenice			Steel chain, track width: 500mm, running gear length 3350 mm, gradient ability: 21°		
Masa harvesterske glave			630 kg		
Duljina	Širina	Visina	3350 mm	2150 mm	3080 mm
Radijus okretanja			-		
Clearance			425 mm		
Net masa			11000 kg		
Cijena			220000 €		

PONSSE BEAVER

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated Joint 6 wheel Harvester with front pendulum portal axle and rear bogie axle		
Motor		MERCEDES-BENZ OM 904 LA, watercooled 4-cylinder-Turbodiesel with fuel injection		
Snaga		130 kW		
Transmisija		Hydrost.-mech. 2-speed drive. Elec. powered hydrostat and shiftable differential lock. Tractive power: 130 kN		
Hidraulični sistem		Multi-Loop hydr, System for drive and Tools		
Hidraulični spremnik		200 Litara		
Spremnik za gorivo		180 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. Articulated frame steering		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear: 600/55 - 26,5, Option: 710/55 - 26,5		
Dizalica		Tip	PONSSE HN 125, HN200, C33	
		Doseg	10 m	
		Moment	205/200 kNm	
Harvesterska glava		POMSSE H5/H6		
Max. sječni promjer		520 mm		
Max. promjer kresanja		500 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		3 hydrost. powered spiked rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		PONSSE Opti		
Gusjenice		-		
Masa harvesterske glave		850 kg		
Duljina	Širina	Visina	7070 mm	2600 mm3800 mm
Radijus okretanja				
Clearance		640 mm		
Net masa		16000 kg		
Cijena		330000 €		

PONSSE ERGO

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated Joint 6 or 8 wheel Harvester with front pendulum portal axle and rear bogie axle		
Motor		MERCEDES-BENZ OM 906 LA, watercooled 6-cylinder-Turbodiesel with fuel injection		
Snaga		210 kW		
Transmisija		Hydrst.-mech. 2-speed drive. Elec. powered hydrostat and shiftable differential lock. Tractive power: 160 Kn		
Hidraulični sistem		Multi-Loop hydr, System for drive and Tools		
Hidraulični spremnik		350 Litara		
Spremnik za gorivo		400 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. Articulated frame steering		
Kočnice		Service brake: hydr. multi-disc break in oil bath. Fixing brake: spring-loaded brake		
Gume (gusjenice)		710/26.5 – 34		
Dizalica		Tip	PONSSE C4/C5	
		Doseg	10 m	
		Moment	225/248/228 kNm	
Harvesterska glava		POMSSE H6/H7		
Max. sječni promjer		620 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		2 oscillating double roller or spiked rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		PONSSE Opti4G, System (HKS)		
Gusjenice		-		
Masa harvesterske glave		850 kg		
Duljina	Širina	Visina	7680 mm	2670 mm3770 mm
Radijus okretanja				
Clearance		610 mm		
Net masa		15700 kg		
Cijena		430000 €		

PONSSE ERGO 8W

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated steering, 8-wheeled timber harvester		
Motor		MB OM936 LA EU Stage IV		
Snaga		210 Kw		
Transmisija		-		
Hidraulični sistem		PONSSE OptiControl, Separate hydraulic travel for harvester head and crane		
Hidraulični spremnik		290 Litara		
Spremnik za gorivo		380 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		-		
Kočnice		-		
Gume (gusjenice)		Front: 600-26.5, 710-26.5 or 800-26.5 Rear: 600-26.5, 710-26.5 or 800-26.5		
Dizalica	Tip		PONSSE C44+	
	Doseg		10/11 m	
	Moment		225/248/228 kNm	
Harvesterska glava		POMSSE H6/H7		
Max. sječni promjer		650 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		4 + 1 + 1 knife		
Uređaj za posmak		2 swinging mounted drive double rollers or sting tapes		
Posmična brzina		5,0 m/s		
Mjerni uređaj		PONSSE Opti4G		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	9660 mm	2630 mm3800 mm
Radijus okretanja				
Clearance		600 mm		
Net masa		21500 kg		
Cijena		487000 €		

PONSSE Fox

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated Joint 8 wheel Harvester		
Motor		MERCEDES-BENZ OM936 LA, watercooled 6-cylinder-Turbodiesel		
Snaga		210 kW		
Transmisija		Hydrst.-mech. 2-speed drive. Elec. powered hydrostat and shiftable differential lock		
Hidraulični sistem		Multi-Loop hydr. system for drive and tools		
Hidraulični spremnik		290 Litara		
Spremnik za gorivo		320 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrst. articulated frame steering		
Kočnice		Service brake: hydr. multi-disc brake. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear: 600/55 - 26,5; Optional: 710/55 - 26,5		
Dizalica	Tip		PONSSE C50	
	Doseg		11 m	
	Moment		252 kNm	
Harvesterska glava		POMSSE H5/H6/H7		
Max. sječni promjer		640		
Max. promjer kresanja		600		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		3 hydrost. feed rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		PONSSE OptiControl		
Gusjenice		-		
Masa harvesterske glave		1300 kg		
Duljina	Širina	Visina	8020 mm	2640 mm3720 mm
Radijus okretanja				
Clearance				
Net masa		17700 kg		
Cijena		€		

PONSSE Scorpion

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated Joint 8 wheel Harvester		
Motor		MERCEDES-BENZ OM936 LA, watercooled 6-cylinder-Turbodiesel		
Snaga		210 kW		
Transmisija		Hydrst.-mech. 2-speed drive. Elec. powered hydrostat and shiftable differential lock		
Hidraulični sistem		Multi-Loop hydr. system for drive and tools		
Hidraulični spremnik		290 Litara		
Spremnik za gorivo		320 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrst. articulated frame steering		
Kočnice		Service brake: hydr. multi-disc brake. Fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear: 600/55 - 26,5;		
Dizalica	Tip		PONSSE C50	
	Doseg		11 m	
	Moment		252 kNm	
Harvesterska glava		POMSSE H5/H6/H7		
Max. sječni promjer		640 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		3 hydrost. Feed rolls		
Posmična brzina		5,0 m/s		
Mjerni uređaj		PONSSE OptiControl		
Gusjenice		-		
Masa harvesterske glave		1300 kg		
Duljina	Širina	Visina	2640 mm	3720 mm
Radijus okretanja				
Clearance		655 mm		
Net masa		20800 kg		
Cijena		€		

PONSSE Scorpion King

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated steering, 8-wheeled timber harvester		
Motor		MERCEDES-BENZ OM936 LA		
Snaga		210 Kw		
Transmisija		-		
Hidraulični sistem		-		
Hidraulični spremnik		280 Litara		
Spremnik za gorivo		320 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrst. articulated frame steering		
Kočnice		Service brake: hydr. multi-disc brake. Fixing brake: spring-loaded brake		
Gume (gusjenice)		600/55-, 710/45- oder 800/40-26.5		
Dizalica		Tip	PONSSE C50	
		Doseg	11 m	
		Moment	252 kNm	
Harvesterska glava		POMSSE H5/H6/H7		
Max. sječni promjer		640 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		4+1+1 knives		
Uređaj za posmak		3 hydrost. Feed rolls		
Posmična brzina		6,0 m/s		
Mjerni uređaj		PONSSE OptiControl		
Gusjenice		-		
Masa harvesterske glave				
Duljina	Širina	Visina	8200 mm	2640 mm3720 mm
Radijus okretanja				
Clearance		655 mm		
Net masa		22800 kg		
Cijena		483000 €		

PONSSE H84 V.III

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated steered, 6-wheel Harvester with front bogie axle and rear planetary solid axle		
Motor		DEUTZ, oil-cooled 4-cylinder-Common Rail-Dieselmotor		
Snaga		113 Kw		
Transmisija		Elec. operated hydrst. drive, with road and underdrive gear. Differential lock. Tractive power 131 kN		
Hidraulični sistem		Output-regulated multi-hydr.system for drive and Tools		
Hidraulični spremnik		140 Litara		
Spremnik za gorivo		285 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		2-cylinder articulated frame steering, controled via crane-control		
Kočnice		System brake: hydr. multi-disc brakes with spring. drive-brake pressure controlled with pressure accumulator. Stabilisation swing brake when using the crane		
Gume (gusjenice)		Front: 600/40 - 22,5 16 pr; rear: 600/55 - 26,5 12 pr		
Dizalica		Tip		WARTAH CH 95
		Doseg		8,9 m
		Moment		95 kNm
Harvesterska glava		KETO 51 Supreme		
Max. sječni promjer		370 mm		
Max. promjer kresanja		320 mm		
Noževi za kresanje		1 fixed and 2 moving delimbing knives		
Uređaj za posmak		2 hydr. chain belts		
Posmična brzina		3,8 m/s		
Mjerni uređaj		EPEC 4W 30		
Gusjenice		-		
Masa harvesterske glave		430 kg		
Duljina	Širina	Visina	6100 mm	2500 mm3350 mm
Radijus okretanja				
Clearance		500 mm		
Net masa		11000 kg		
Cijena		€		

PONSSE H84 V.III 4-Rad

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI						
Tip		Articulated steered, 4-wheel Harvester with front and rear planetary solid axle				
Motor		DEUTZ, oil-cooled 4-cylinder-Common Rail-Dieselmotor				
Snaga		113 Kw				
Transmisija		Elec. operated hydrst. drive, with road and underdrive gear. Differential lock. Tractive power 131 kN				
Hidraulični sistem		Output-regulated multi-hydr.system for drive and Tools				
Hidraulični spremnik		140 Litara				
Spremnik za gorivo		285 Litara				
Spojka		-				
Mjenjač		-				
Upravljanje		2-cylinder articulated frame steering, controled via crane-control				
Kočnice		System brake: hydr. multi-disc brakes with spring. drive-brake pressure controlled with pressure accumulator. Stablilisation swing brake when using the crane				
Gume (gusjenice)		Front and rear: 600/55 - 26,5 20 pr				
Dizalica		Tip		WARTAH CH 95		
		Doseg		8,9 m		
		Moment		95 kNm		
Harvesterska glava		KETO Forst Energy				
Max. sječni promjer		300 mm				
Max. promjer kresanja		250 mm				
Noževi za kresanje		1 fixed and 2 moving delimbing knives				
Uređaj za posmak		2 hydr. chain belts				
Posmična brzina		5,0 m/s				
Mjerni uređaj		EPEC 4W 30				
Gusjenice		-				
Masa harvesterske glave		280 kg				
Duljina	Širina	Visina	5900 mm		2400 mm	3600 mm
Radijus okretanja						
Clearance		500 mm				
Net masa		10440 kg				
Cijena		€				

PONSSE H85 V.III

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI					
Tip		Articulated steered, 6-wheel Harvester with front bogie axle and rear planetary solid axle			
Motor		DEUTZ Typ TCD2013 V06 L02, oil-cooled 6-cylinder-Common Rail-Diesel engine			
Snaga		152 Kw			
Transmisija		Elec. operated hydrst. drive, with road and underdrive gear. Differential lock			
Hidraulični sistem		Output-regulated multi-hydr.system 240 l/1500 r/pm			
Hidraulični spremnik		190 Litara			
Spremnik za gorivo		285 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		2-cylinder articulated frame steering, controled via crane-control			
Kočnice		System brake: hydr. multi-disc brakes with spring. drive-brake pressure controlled with pressure accumulator. Stablilisation swing brake when using the crane			
Gume (gusjenice)		Front: 600/50 - 22,5 16 rear: 600/60-30,5 14 pr			
Dizalica		Tip	WARTAH CH 135		
		Doseg	9,7 m		
		Moment	143 kNm		
Harvesterska glava		KETO 100 Supreme			
Max. sječni promjer		450 mm			
Max. promjer kresanja		400 mm			
Noževi za kresanje		1 fixed and 3 moving delimbing knives			
Uređaj za posmak		2 hydr. chain belts			
Posmična brzina		4,0 m/s			
Mjerni uređaj		EPEC 4W 30 ili MOTOMIT			
Gusjenice		-			
Masa harvesterske glave		620 kg			
Duljina	Širina	Visina	5900 mm	2400 mm	3650 mm
Radijus okretanja					
Clearance		600 mm			
Net masa		12400 kg			
Cijena		€			

PONSSE H86 V.III

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
 Internet: <http://www.ponsse.com>



TEHNIČKI DETALJI				
Tip		Articulated steered, 6-wheel Harvester with front bogie axle and rear planetary solid axle		
Motor		DEUTZ Typ TCD2013 V06 L02, oil-cooled 6-cylinder-Common Rail-Diesel engine		
Snaga		181 Kw		
Transmisija		Elec. operated hydrst. drive, with road and underdrive gear. Differential lock		
Hidraulični sistem		Output-regulated multi-hydr.system with transmission valve techn. Max pressure: 210 - 240 bar		
Hidraulični spremnik		200 Litara		
Spremnik za gorivo		285 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		2-cylinder articulated frame steering, controled via crane-control		
Kočnice		System brake: hydr. multi-disc brakes with spring. drive-brake pressure controlled with pressure accumulator. Stabilisation swing brake when using the crane		
Gume (gusjenice)		Front: 600/55 - 26,5 16 pr rear: 600/65 - 34 14 pr		
Dizalica		Tip	WARTAH CH 175	
		Doseg	9,7 m	
		Moment	178 kNm	
Harvesterska glava		KETO 150 LD		
Max. sječni promjer		550 mm		
Max. promjer kresanja		450 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		2 hydr. chain belts		
Posmična brzina		4,0 m/s		
Mjerni uređaj		EPEC 4W 30 ili MOTOMIT		
Gusjenice		-		
Masa harvesterske glave		890 kg		
Duljina	Širina	Visina		
			7200 mm	3000 mm3800 mm
Radijus okretanja				
Clearance		600 mm		
Net masa		20500 kg		
Cijena		€		

PRO SILVA 810

PROSILVA OYJ
Teollisuustie 3
SF-34600 Ruovesi
Finska
E-mail: prosilva@prosilva.fi
Internet: www.prosilva.fi



TEHNIČKI DETALJI					
Tip		Articulated Joint steering 4-wheel Harvester			
Motor		DEUTZ 2012C, watercooled 6-cylinder-Turbo-Dieselengine with fuel-injection and Intercooler			
Snaga		151 Kw			
Transmisija		Hydrost.-mech. 2-gear drive, shiftable differential lock. Tractive power: 120 kN			
Hidraulični sistem		Multi-Loop hydr. system for drive and tools. Elec. load sensing system			
Hidraulični spremnik		215 Litara			
Spremnik za gorivo		215 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydrost. articulated frame steering			
Kočnice		System Brakes: hydrost. Multi-disc brake. Fixing brake: elec.-hydr.spring-loaded brake			
Gume (gusjenice)		Front and rear: 600/65 – 34			
Dizalica		Tip	LOGMER 10-95		
		Doseg	9 m		
		Moment	160 kNm		
Harvesterska glava		KETO 100			
Max. sječni promjer		510 mm			
Max. promjer kresanja		480 mm			
Noževi za kresanje		1 fixed and 2 moving delimbing knives			
Uređaj za posmak		2 hydr. chain belts			
Posmična brzina		5,0 m/s			
Mjerni uređaj		MOTOMIT			
Gusjenice		-			
Masa harvesterske glave		800 kg			
Duljina	Širina	Visina	5700 mm	2650 mm	3100 mm
Radijus okretanja					
Clearance		600 mm			
Net masa		11000 kg			
Cijena		230000 €			

PRO SILVA 910

PROSILVA OYJ
Teollisuustie 3
SF-34600 Ruovesi
Finska
E-mail: prosilva@prosilva.fi
Internet: www.prosilva.fi



TEHNIČKI DETALJI				
Tip		Articulated Joint steering 4-wheel Harvester		
Motor		DEUTZ 2012C, watercooled 6-cylinder-Turbo-Dieselengine with fuel-injection and Intercooler		
Snaga		151 Kw		
Transmisija		Hydrost.-mech. 2-gear drive, shiftable differential lock. Tractive power: 160 kN		
Hidraulični sistem		Multi-Loop hydr. system for drive and tools. Elec. load sensing system		
Hidraulični spremnik		215 Litara		
Spremnik za gorivo		215 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. articulated frame steering		
Kočnice		System Brakes: hydrost. Multi-disc brake. Fixing brake: elec.-hydr.spring-loaded brake		
Gume (gusjenice)		Front and rear: 700/70 – 34		
Dizalica		Tip	LOGMER 10-95	
		Doseg	9 m	
		Moment	160 kNm	
Harvesterska glava		FORESTERI 25 RH		
Max. sječni promjer		630 mm		
Max. promjer kresanja		550 mm		
Noževi za kresanje		1 fixed and 2 moving delimbing knives		
Uređaj za posmak		2 hydr. chain belts		
Posmična brzina		5,0 m/s		
Mjerni uređaj		MOTOMIT IT		
Gusjenice		-		
Masa harvesterske glave		800 kg		
Duljina	Širina	Visina	5700 mm2800 mm3300 mm	
Radijus okretanja				
Clearance		700 mm		
Net masa		13000 kg		
Cijena		250000 €		

ROTTNE H-14 C

ROTTNE INDUSTRIE AB

Fabrigsvägen 12

SE-36040 Rottne

Švedska

Internet: <http://www.rottne.com>



TEHNIČKI DETALJI					
Tip		Articulated steered, 6-wheel Harvester with front bogie axle and rear single axle			
Motor		JOHN DEERE 6068 HF485, TIER3B, watercooled 6-cylinder-Turbodiesel, charge air cooling			
Snaga		187 Kw			
Transmisija		Hydr.-mech. 2-speed drive, shiftable differential lock. Tractive power 168 kN			
Hidraulični sistem		Separated System for drive and Tools			
Hidraulični spremnik		200 Litara			
Spremnik za gorivo		460 Litara			
Spojka		-			
Mjenjač		-			
Upravljanje		Hydrost. articulated frame steering			
Kočnice		System Brakes: hydrost. Multi-disc brake. Fixing brake: elec.-hydr.spring-loaded brake			
Gume (gusjenice)		Front: 700/45 - 26.5,rear: 700/55 – 34			
Dizalica	Tip		ROTTNR RH 140		
	Doseg		10,3 m		
	Moment		150/202 kNm		
Harvesterska glava		ROTTNE EGS 595 Optional: SP451L7/SP561LF			
Max. sječni promjer		600 mm			
Max. promjer kresanja		600 mm			
Noževi za kresanje		1 fixed and 4 moving delimbing knives			
Uređaj za posmak		3 hydr. FEED-WHEELS			
Posmična brzina		5,1 m/s			
Mjerni uređaj		ROTTNE D5, Operated via Pc-based OS with display and keyboard. Data exchange via disc, online or laptop			
Gusjenice		-			
Masa harvesterske glave		1100 kg			
Duljina	Širina	Visina	12000 mm	2800 mm	3650 mm
Radijus okretanja					
Clearance		525 mm			
Net masa		19000 kg			
Cijena		387543 €			

ROTTNE H-20 B

ROTTNE INDUSTRIE AB

Fabrigsvägen 12

SE-36040 Rottne

Švedska

Internet: <http://www.rottnet.com>



TEHNIČKI DETALJI			
Tip		Articulated steered, 6-wheel Harvester with front bogie axle and rear single axle	
Motor		JOHN DEERE 6068 HF485, TIER3B, watercooled 6-cylinder-Turbodiesel, charge air cooling	
Snaga		187 Kw	
Transmisija		Hydr.-mech. 2-speed drive, shiftable differential lock. Tractive power 180 kN	
Hidraulični sistem		Separated System for drive and Tools	
Hidraulični spremnik		200 Litara	
Spremnik za gorivo		460 Litara	
Spojka		-	
Mjenjač		-	
Upravljanje		Hydrost. articulated frame steering	
Kočnice		System Brakes: hydrost. Multi-disc brake. Fixing brake: elec.-hydr.spring-loaded brake	
Gume (gusjenice)		Front: 700/45 - 30,5,rear: 700/70 – 34	
Dizalica		Tip	ROTTNR RH 200
		Doseg	10 m
		Moment	200/254 kNm
Harvesterska glava		ROTTNE EGS 705	
Max. sječni promjer		750 mm	
Max. promjer kresanja		700 mm	
Noževi za kresanje		1 fixed and 4 moving delimbing knives	
Uređaj za posmak		4 hydr. FEED-WHEELS	
Posmična brzina		6,1 m/s	
Mjerni uređaj		ROTTNE D5, Operated via Pc-based OS with display and keyboard. Data exchange via disc, online or laptop	
Gusjenice		-	
Masa harvesterske glave		1480 kg	
Duljina	Širina	Visina	
12600 mm	3000 mm	3700 mm	
Radijus okretanja			
Clearance		630 mm	
Net masa		21500 kg	
Cijena		421891 €	

ROTTNE H-8

ROTTNE INDUSTRIE AB
 Fabrigsvägen 12
 SE-36040 Rottne
 Švedska
 Internet: <http://www.rottne.com>



TEHNIČKI DETALJI				
Tip		Articulated steered, 4-wheel Harvester with levelling unit for the swing arm chassis		
Motor		JOHN DEERE 4045 HF, TIER3, watercooled 4-cylinder-Turbodiesel		
Snaga		116 Kw		
Transmisija		Hydr. 4-speed drive, shiftable differential lock. Tractive power 73 Kn		
Hidraulični sistem		Separated System for drive and Tools		
Hidraulični spremnik		140 Litara		
Spremnik za gorivo		260 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		articulated frame steering		
Kočnice		System brake: hydrostat Brakes on all wheels fixing brake: spring-loaded brake		
Gume (gusjenice)		Front and rear: 500/60 - 26.5		
Dizalica	Tip		ROTTNR RK 50	
	Doseg		7 m	
	Moment		53/80 kNm	
Harvesterska glava		ROTTNE EGS 405		
Max. sječni promjer		450 mm		
Max. promjer kresanja		400 mm		
Noževi za kresanje		1 fixed and 4 moving delimbing knives		
Uređaj za posmak		4 hydr. FEED-WHEELS with chains		
Posmična brzina		4,0 m/s		
Mjerni uređaj		ROTTNE D5, Operated via Pc-based OS with display and keyboard. Data exchange via disc, online or laptop		
Gusjenice		-		
Masa harvesterske glave		420 kg		
Duljina	Širina	Visina	8369 mm	2050 mm3060 mm
Radijus okretanja				
Clearance		1000 mm		
Net masa		9000 kg		
Cijena		268307 €		

ROTTNE H 11 C 6WD

ROTTNE INDUSTRIE AB
S-36040 Rottne
Švedska
<http://www.rottnet.com/>



TEHNIČKI DETALJI				
Tip		6		
Motor		J.DEERE 6068 HFC94, TIER 3B		
Snaga		164 kW		
Transmisija		Hydr.-mech. drive load controled. Shiftable differential lock		
Hidraulični sistem		Load-dependent separated System, disconnected from transmission		
Hidraulični spremnik		150 Litara		
Spremnik za gorivo		377 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydrost. articulated frame steering		
Kočnice		System brake: dual-circuit pneumatic-hydr. wet Multi-disc brakes		
Gume (gusjenice)		Prednje: 710/40 x 24.5, stražnje 710/55 x 34		
Dizalica		Tip	ROTTNE RC 185. Parallel telescopic crane	
		Doseg	11,3 m	
		Moment	193 kNm	
Harvesterska glava		ROTTNE SP451LF; Optional: SP561 LF		
Max. sječni promjer		450 mm		
Max. promjer kresanja		350 mm		
Noževi za kresanje				
Uređaj za posmak				
Posmična brzina		6,0 m/s		
Mjerni uređaj		ROTTNE D4, Operated via Pc-based OS with display and keyboard.Data Exchange via disc, online or laptop		
Gusjenice		-		
Masa harvesterske glave		640 kg		
Duljina	Širina	Visina	7888 mm	2830 mm3633 mm
Radijus okretanja		14,1 m		
Clearance		600		
Net masa		17400 kg		
Cijena				

ROTTNE H 11 C 8WD

ROTTNE INDUSTRIE AB
S-36040 Rottne
Švedska
<http://www.rottne.com/>



TEHNIČKI DETALJI				
Tip		Articulated steered, 8-wheel Harvester		
Motor		J.DEERE 6068 HFC 94, TIER 3B		
Snaga		164 Kw		
Transmisija		Hydr.-mech. drive load controled, differential lock		
Hidraulični sistem		Load-dependent separated System, disconnected from transmission		
Hidraulični spremnik		150 Litara		
Spremnik za gorivo		377 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Articulated frame steering		
Kočnice		System brake: dual-circuit pneumatic-hydr. wet Multi-disc brakes fixing brake: spring-loaded brake		
Gume (gusjenice)		Prednje/stražnje: 710/40 x 24.5		
Dizalica	Tip		ROTTNE RC 185. Parallel telescopic crane	
	Doseg		11,3 m	
	Moment		193 kNm	
Harvesterska glava		ROTTNE SP451LF; Optional: SP561 LF		
Max. sječni promjer		420 mm		
Max. promjer kresanja		350 mm		
Noževi za kresanje		-		
Uređaj za posmak		-		
Posmična brzina		6,0 m/s		
Mjerni uređaj		ROTTNE D5, Operated via Pc-based OS with display and keyboard.Data Exchange via disc, online or laptop		
Gusjenice		-		
Masa harvesterske glave		640 kg		
Duljina	Širina	Visina	7888 mm	3633 mm
Radijus okretanja		-		
Clearance		600		
Net masa		18900 kg		
Cijena		338620 €		

SAMPO Rosenlew HR 46

SAMPO ROSENLEW OY

Teollisuuskatu 2-6

FIN-28101 Pori

Finska

Internet: <http://www.sampo-rosenlew.fi>



TEHNIČKI DETALJI				
Tip		Articulated steered, 4-wheel Harvester		
Motor		Agco Power 44 CTA		
Snaga		84 kW		
Transmisija		Hydrst		
Hidraulični sistem		Pump Rexroth A10V0 135cc/297 l/min/2200rpm		
Hidraulični spremnik		110 Litara		
Spremnik za gorivo		160 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Hydro. articulated frame steering		
Kočnice		Multi disc brakes in oil bath		
Gume (gusjenice)		Front and rear: 500/70-28, 540/65-28, 650/60-26.5		
Dizalica		Tip		
		Doseg		
		Moment		
Harvesterska glava		KETO 11-55/ KESLA 18RH/NISULA 400H		
Max. sječni promjer		370 mm		
Max. promjer kresanja		320 mm		
Noževi za kresanje		-		
Uređaj za posmak		-		
Posmična brzina		-		
Mjerni uređaj		-		
Gusjenice		-		
Masa harvesterske glave		-		
Duljina	Širina	Visina	4900 mm	2400 mm3140 mm
Radijus okretanja		4,2		
Clearance		670 mm		
Net masa		9500 kg		
Cijena		215634 €		

SAMPO Rosenlew 1066

SAMPO ROSENLEW OY
Teollisuuskatu 2-6
FIN-28101 Pori
Finska
Internet: <http://www.sampo-rosenlew.fi>



TEHNIČKI DETALJI

Tip		Articulated steered, 4-wheel Harvester				
Motor		SISU 66 ETA, watercooled 6-cylinder-Turbodiesel				
Snaga		129 Kw				
Transmisija		Hydrst.-mech. 2-gear drive and differential lock				
Hidraulični sistem		Separated System for drive and Tools				
Hidraulični spremnik		200 Litara				
Spremnik za gorivo		330 Litara				
Spojka		-				
Mjenjač		-				
Upravljanje		Hydro. articulated frame steering				
Kočnice		Hydr. disc brakes				
Gume (gusjenice)		Front and rear: 600/65 - 34				
Dizalica		Tip		KESLA H 13105		
		Doseg				
		Moment				
Harvesterska glava		KETO 100				
Max. sječni promjer		450 mm				
Max. promjer kresanja		400 mm				
Noževi za kresanje		3 moving delimbing knives				
Uređaj za posmak		-				
Posmična brzina		5,5 m/s				
Mjerni uređaj		MOTOMIT				
Gusjenice		-				
Masa harvesterske glave		700 kg				
Duljina	Širina	Visina	9500 mm		3000 mm	3390 mm
Radijus okretanja						
Clearance			600 mm			
Net masa			13000 kg			
Cijena			€			

SILVATEC Sleipner 8280TH „B.O.S.S. – Top Line“

SILVATEC A/S
 Fabriksvej 50
 DK-9640 Farso
 Dänemark
 Tel.: 0045/9863/2411
 E-mail: silvatec@silvatec.com
 Internet: www.silvatec.com



TEHNIČKI DETALJI				
Tip		Articulated steered, 8-wheer		
Motor		Mercedes OM906LA		
Snaga		205 kW		
Transmisija		Hydr.-mech. 2-gear drive, differential lock (front and rear)		
Hidraulični sistem		Load-Sensing-constant pressure System; 1 x 190/1 x 130 ccm hydr. Pumps		
Hidraulični spremnik		400 Litara		
Spremnik za gorivo		400 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Articulated frame steering		
Kočnice		Hydr. dual-circuit braking System. Hydr. fixing brake: spring-loaded brake		
Gume (gusjenice)		Trelleborg 422 SB 710/45 x 26,5		
Dizalica	Tip		Trelleborg 422 SB	
	Doseg		10 m	
	Moment		188 kNm	
Harvesterska glava		Silvatec Modell 560 IP supercut		
Max. sječni promjer		635 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		1 fixed and 5 moving delimbing knives		
Uređaj za posmak		2 hydr. steel rolls. (Optional rubber rolls with chains)		
Posmična brzina		5,5 m/s		
Mjerni uređaj		TM2200		
Gusjenice		-		
Masa harvesterske glave		1350 kg		
Duljina	Širina	Visina	7700 mm	2850 mm3350 mm
Radijus okretanja		7,5 m		
Clearance		580 mm		
Net masa		23200 kg		
Cijena		486000 €		

SILVATEC Sleipner 8280TH

SILVATEC A/S
 Fabriksvej 50
 DK-9640 Farso
 Dänemark
 Tel.: 0045/9863/2411
 E-mail: silvatec@silvatec.com
 Internet: www.silvatec.com



TEHNIČKI DETALJI				
Tip		Articulated steered, 8-wheel Harvester with 2 bogie axles		
Motor		Mercedes OM906LA		
Snaga		205 kW		
Transmisija		Hydr.-mech. 2-gear drive. All wheel drive with differential lock (front and rear)		
Hidraulični sistem		-		
Hidraulični spremnik		400 Litara		
Spremnik za gorivo		400 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Articulated frame steering		
Kočnice		Hydr. dual-circuit braking System. Hydr. fixing brake: spring-loaded brake		
Gume (gusjenice)		Trelleborg 422 SB 710/45 x 26,5		
Dizalica	Tip		Loglift 220 V	
	Doseg		10 m	
	Moment		188 kNm	
Harvesterska glava		Silvatec Modell 560		
Max. sječni promjer		635 mm		
Max. promjer kresanja		600 mm		
Noževi za kresanje		1 fixed and 5 moving delimbing knives		
Uređaj za posmak		2 hydr. steel rolls		
Posmična brzina		5,5 m/s		
Mjerni uređaj		TM2200		
Gusjenice		-		
Masa harvesterske glave		1350 kg		
Duljina	Širina	Visina	7700 mm	2850 mm3350 mm
Radijus okretanja		7,5 m		
Clearance		580 mm		
Net masa		18800 kg		
Cijena		451000 €		

SILVATEC Sleipner 8280TH „Efficiency Line“

SILVATEC A/S
 Fabriksvej 50
 DK-9640 Farso
 Dänemark
 Tel.: 0045/9863/2411
 E-mail: silvatec@silvatec.com
 Internet: www.silvatec.com



TEHNIČKI DETALJI				
Tip		Articulated steered, 8-wheel Harvester with 2 bogie axles		
Motor		Mercedes OM906LA		
Snaga		205 kW		
Transmisija		Hydr.-mech. 2-gear drive. Differential lock (front and rear)		
Hidraulični sistem		Load-Sensing-constant pressure System; 1 x 190/hydr. Pump		
Hidraulični spremnik		400 Litara		
Spremnik za gorivo		400 Litara		
Spojka		-		
Mjenjač		-		
Upravljanje		Articulated frame steering		
Kočnice		Hydr. breaking System. Hydr. fixing brake: spring-loaded brake		
Gume (gusjenice)		Trelleborg 422 SB 710/45 x 26,5		
Dizalica	Tip		Loglift 220 V	
	Doseg		8,3 m	
	Moment		188 kNm	
Harvesterska glava		Silvatec Modell 450		
Max. sječni promjer		550 mm		
Max. promjer kresanja		500 mm		
Noževi za kresanje		1 fixed and 5 moving delimbing knives		
Uređaj za posmak		2 hydr. steel rolls		
Posmična brzina		6,5 m/s		
Mjerni uređaj		TM1000		
Gusjenice		-		
Masa harvesterske glave		1024 kg		
Duljina	Širina	Visina	7700 mm	2620 mm3300 mm
Radijus okretanja		7,5 m		
Clearance		580 mm		
Net masa		18800 kg		
Cijena		395000 €		

KATALOG SKIDERA



1. CAMOX.....	1
2. HITTNER.....	3
3. HSM	6
4. JOHN DEERE.....	13
5. PFANZELT	14
6. WELTE.....	17

CAMOX F 140

PIALLEPORT S.A.
 ZA le Lombard
 FR-38870 St.Simeon de Bressieux
 Francuska
 E-mail: pialleport@wanadoo.fr
 Internet: www.perso.wanadoo.fr/sa.piallepor



TEHNIČKI DETALJI

Tip	Articulated steered forestry tractor, 4 same size wheels. All wheel drive and single-drum winch			Vitlo	
Motor	Cummins TYP 6 BT 5.9 lt			Ulazna sila	160 Kn
Snaga	114 KW			Izlazna sila	100 kN
Broj okretaja	2200 1/min			Unutarnji R bubnja	200 mm
Spojka	Torque converter			Vanjski R bubnja	500 mm
Mjenjač	Powershift with torque converter 5 forward speed, 3 backward speed			Duljina užeta	180 mm
Osovina	Proportional differential lock, front axle seperatly cassis mounted; pendulum radius 30 °			Promjer užeta	16 mm
Upravljanje	articulated steering wheel via double cylinder			Pomoćno uže	-
Kočnice	Hydraulic disc brake oil-cooled Parking brake: gear box disc brake			Prosječna brzina užeta	0,5 m/s
Spremnik	150 Litara			Pogon	Hydrostatic
Prednja odrivna daska	2000 mm			Reduktor vitla	Worm wheel gear box
Stražnja odrivna daska	-			Spojka vitla	Hydr. disc cluch
Gume	18,4 x 34			Kočnica vitla	Hydr. multi disc-brake
Sigurnosni sistem	Steel protection cabin			Upravljač vitla	Electro-hydraulic via push-button control or remote control
Duljina	širina	visina	5680 mm	2420 mm	2800 mm
Visina težišta					
Radius okretanja					
Clearance		600 mm			
Masa		Pred.Osovin			
		Straž.Osovin			
		Net masa	9500 kg		
Ostalo					
Cijena		170285 €			

CAMOX F 175

PIALLEPORT S.A.
 ZA le Lombard
 FR-38870 St.Simeon de Bressieux
 Francuska
 E-mail: pialleport@wanadoo.fr
 Internet: www.perso.wanadoo.fr/sa.piallepor



TEHNIČKI DETALJI

Tip			Articulated steered forestry tractor, 4 same size wheels. All wheel drive and single-drum winch			Vitlo	Single drum winch Mod. CMC 16 t Zugkraftc
Motor			Water cooled CUMMINS Typ QSB 5,9			Ulazna sila	160 Kn
Snaga			140 KW			Izlazna sila	100 kN
Broj okretaja			1500 1/min			Unutarnji R bubnja	200 mm
Spojka			Torque converter			Vanjski R bubnja	500 mm
Mjenjač			WG 190 ZF powershift transmission			Duljina užeta	18 m
Osovina			Proportional differential lock, front axle sepearatly cassis mounted; pendulum radius 30 °			Promjer užeta	16 mm
Upravljanje			Articulated steering wheel via double cylinder			Pomoćno uže	-
Kočnice			Hydraulic disc brake oil-cooled Parking brake: gear box disc brake			Prosječna brzina užeta	0,5 m/s
Spremnik			180 Litara			Pogon	Hydrostatic
Prednja odrivna daska			2200 mm			Reduktor vitla	Worm wheel gear box
Stražnja odrivna daska			5850 mm			Spojka vitla	Hydr. disc cluch
Gume			23,1 x 26			Kočnica vitla	Hydr. multi disc-brake
Sigurnosni sistem			Steel protection cabin			Upravljač vitla	Electro-hydraulic via push-button control or remote control
Duljina	Širina	visina	5850 mm	2500 mm	2900 mm		
Visina težišta							
Radius okretanja							
Clearance			610 mm				
Masa			Pred.Osovin				
			Straž.Osovin				
			Net masa		12000 kg		
Ostalo							
Cijena			186090 €				

ECOTRAC 120 V

HITTNER d.o.o.
Pakracka ulica 10
HR-43000 Bjelovar
Hrvatska
Tel.:00385(0)43/244111
E-mail: info@hittner.hr
Internet: www.hittner.hr



TEHNIČKI DETALJI

Tip			Articulated steered forestry tractor, 4 same size wheels. All wheel drive and double-drum winch			Vitlo	Electro-hydraulic double winch Typ VH 80
Motor			Aircooled DEUTZ Typ F6L-914 Diesel engine			Ulazna sila	80 Kn
Snaga			84 KW			Izlazna sila	50 kN
Broj okretaja						Unutarnji R bubnja	200 mm
Spojka			Multi disc clutch			Vanjski R bubnja	490 mm
Mjenjač			Synchronised shift gearbox with 10 forward gears and 2 reverse gears			Duljina užeta	70 m
Osovina			Axle with differential lock			Promjer užeta	14 mm
Upravljanje			Hydraulic articulated frame steering			Pomoćno uže	-
Kočnice			Hydraulic disc brake oil-cooled Parking brake			Prosječna brzina užeta	0,63 m/s
Spremnik			70 Litara			Pogon	Hydrostatic
Prednja odrivna daska			Hydraulic tilt able via 2 hydraulic cylinders			Reduktor vitla	Worm wheel gear box
Stražnja odrivna daska			hydraulic lift and low able			Spojka vitla	Hydr. disc clutch
Gume			16.9 - 30 R, 14 pr			Kočnica vitla	Hydr. multi disc-brake
Sigurnosni sistem			Steel protection cabin			Upravljač vitla	Electro-hydraulic with joystic
Duljina	širina	visina	7130 mm	2220 mm	2950 mm		
Visina težišta							
Radius okretanja			10,2 m				
Clearance			570 mm				
Masa			Pred.Osovin				
			Straž.Osovin				
			Net masa		7200 kg		
Ostalo							
Cijena			90880 €				

ECOTRAC 55 V

HITTNER d.o.o.
 Pakracka ulica 10
 HR-43000 Bjelovar
 Hrvatska
 Tel.: 00385(0)43/244111
 E-mail: info@hittner.hr
 Internet: www.hittner.hr



TEHNIČKI DETALJI

Tip	Articulated steered forestry tractor, 4 same size wheels. All wheel drive and double-drum winch			Vitlo	Electro-hydraulic double winch Typ VH 35		
Motor	Aircooled DEUTZ Typ F6L-914 Diesel engine			Ulazna sila	35 Kn		
Snaga	40 KW			Izlazna sila	25 kN		
Broj okretaja				Unutarnji R bubnja	150 mm		
Spojka	Multi disc clutch			Vanjski R bubnja	340 mm		
Mjenjač	Synchronised shift gearbox with 4 forward gears and 1 reverse gears			Duljina užeta	40 m		
Osovina	Axle with differential lock			Promjer užeta	10 mm		
Upravljanje	Hydraulic articulated frame steering			Pomoćno uže	-		
Kočnice	Hydraulic disc brake oil-cooled Parking brake			Prosječna brzina užeta	1,0 m/s		
Spremnik	45 Litara			Pogon	Mechanical		
Prednja odrivna daska	Hydraulic tilt able via 2 hydraulic cylinders			Reduktor vitla	Cardan shaft		
Stražnja odrivna daska	hydraulic lift and low able			Spojka vitla	Hydr. disc cluch		
Gume	12.4 - 24 R			Kočnica vitla	Hydr. multi disc-brake		
Sigurnosni sistem	Steel protection cabin			Upravljač vitla	Electro-hydraulic with hand lever		
Duljina širina visina	4550 mm	1600 mm	2490 mm				
Visina težišta							
Radius okretanja	7,6 m						
Clearance	400 mm						
Masa	Pred.Osovin						
	Straž.Osovin						
	Net masa	3600 kg					
Ostalo							
Cijena	49850 €						

ECOTRAC 40 V

HITTNER d.o.o.
 Pakracka ulica 10
 HR-43000 Bjelovar
 Hrvatska
 Tel.:00385(0)43/244111
 E-mail: info@hittner.hr
 Internet: www.hittner.hr



TEHNIČKI DETALJI

Tip	Articulated, very manoeuvrable compact tracto			Vitlo
Motor	Lombardini LDW 1603, 3 cylinder			Ulazna sila
Snaga	30 Kw			Izlazna sila
Broj okretaja				Unutarnji R bubnja
Spojka				Vanjski R bubnja
Mjenjač	Synchronised shift gearbox with 4 forward gears and 1 reverse gears			Duljina užeta
Osovina	2			Promjer užeta
Upravljanje	Servo assisted articulated steering			Pomoćno uže
Kočnice	Mechanically			Prosječna brzina užeta
Spremnik	20 Litara			Pogon
Prednja odzivna daska	-			Reduktor vitla
Stražnja odzivna daska	-			Spojka vitla
Gume	-			Kočnica vitla
Sigurnosni sistem	-			Upravljač vitla
Duljina širina visina	2920 mm	1200 mm	1980 mm	
Visina težišta				
Radius okretanja				
Clearance				
Masa	Pred.Osovin			
	Straž.Osovin			
	Net masa	1251 kg		
Ostalo				
Cijena	€			

HSM 805 HD

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.d



TEHNIČKI DETALJI

Tip	Articulated steered forestry tractor, frame structured design, 4-wheels (same size), permanent 4 wheel drive and double drum winch	Vitlo	Electrohyd. double drum winch
Motor	Mercedes Benz 4 cyl. Turbo Diesel	Ulazna sila	100 kN
Snaga	129 Kw	Izlazna sila	60 KN
Broj okretaja	2200 1/min	Unutarnji R bubnja	200 mm
Spojka	Hydrostatic-mech. drive	Vanjski R bubnja	400 mm
Mjenjač	2-gear transfer box gearing	Duljina užeta	80 m
Osovina	NAF planetary axle with differential lock 100%, axle load distribution: in %: 60:40	Promjer užeta	14 mm
Upravljanje	Hyd. articulated frame steering	Pomoćno uže	-
Kočnice	Service brake: 4 multi-disc brake; Fixing brake: spring-loaded brake	Prosječna brzina užeta	2,50 m/s
Spremnik	125 Litara	Pogon	Hydrostatic
Prednja odzivna daska	Hydr. front logging pan (optional: tiltable)	Reduktor vitla	Worm wheel gear box or spur gear
Stražnja odzivna daska	Hydr. liftable and lowerable	Spojka vitla	Self adjusting disc clutch
Gume	23.1 - 26, 16 p	Kočnica vitla	spring-loaded band brake
Sigurnosni sistem	Comfort cabin ROPS/FOPS tested	Upravljač vitla	
Duljina širina visina	6400 mm 2360 mm 3158 mm		
Visina težišta			
Radius okretanja			
Clearance	625 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa	9800 kg	
Ostalo	Skidding crane		
Cijena	219400 €		

HSM 805 H

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.d



TEHNIČKI DETALJI

Tip	Articulated steered forestry tractor, frame structured design, 4-wheels (same size), permanent 4 wheel drive and double drum winch	Vitlo	Electrohyd. double drum winch
Motor	Mercedes Benz 4 cyl. Turbo Diesel	Ulazna sila	80 kN
Snaga	104 Kw	Izlazna sila	48 kN
Broj okretaja		Unutarnji R bubnja	200 mm
Spojka		Vanjski R bubnja	400 mm
Mjenjač	2-gear transfer box gearing	Duljina užeta	80 m
Osovina	NAF planetary axle with differential lock 100%, axle load distribution: in %: 60:40. TRACTIVE POWER 170 Kn	Promjer užeta	14 mm
Upravljanje	Hyd. articulated frame steering	Pomoćno uže	-
Kočnice	Service brake: 4 multi-disc brake; Fixing brake: spring-loaded brake	Prosječna brzina užeta	2,50 m/s
Spremnik	160 Litara	Pogon	Hydrostatic
Prednja odzivna daska	Hydr. front logging pan (optional: tiltable)	Reduktor vitla	Worm wheel gear box or spur gear
Stražnja odzivna daska	Hydr. liftable and lowerable	Spojka vitla	Self adjusting disc clutch
Gume	600/60 x 30,5 T414	Kočnica vitla	spring-loaded band brake
Sigurnosni sistem	Comfort cabin ROPS/FOPS tested	Upravljač vitla	
Duljina širina visina	5650 mm 2360 mm 3115 mm		
Visina težišta			
Radius okretanja			
Clearance	581 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa	9200 kg	
Ostalo	Skidding crane		
Cijena	219400 €		

HSM 805 s

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Tip	Articulated steering 4-wheel combination skidding machine			Vitlo	Adler double drum winch HY 20-O (2 x 100 kN)
Motor	IVECO NEF 4 Zyl. Common Rail Turbo / EuroMot ANIMAL 3			Ulazna sila	100 kN
Snaga	104 Kw			Izlazna sila	
Broj okretaja	2200 1/min			Unutarnji R bubnja	
Spojka				Vanjski R bubnja	
Mjenjač	2-gear transfer box gearing			Duljina užeta	100 m
Osovina	NAF planetary axle with differential lock 100%			Promjer užeta	14 mm
Upravljanje	Articulated frame steering 44 °			Pomoćno uže	-
Kočnice	-			Prosječna brzina užeta	
Spremnik	160 Litara			Pogon	
Prednja odzivna daska	lowerable rear plate 2200 mm wide			Reduktor vitla	
Stražnja odzivna daska				Spojka vitla	
Gume	23.1 x 26 min			Kočnica vitla	
Sigurnosni sistem				Upravljač vitla	
Duljina širina visina	mm	mm	mm		
Visina težišta					
Radius okretanja					
Clearance	mm				
Masa					
	Pred.Osovin				
	Straž.Osovin				
	Net masa			9300 kg	
Ostalo	Special features: remote control, winch, driving with radio, clamping arms for Front blade, joystick steering, street lighting set				
Cijena	€				

HSM 904

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Tip	Articulated steered forestry tractor, frame structured design, 4-wheels (same size), permanent 4 wheel drive and double drum winch	Vitlo	Electronic-hydraulic double drum winch Typ ADLER HY 20
Motor	IVECO NEF 6 Zyl. Common Rail Turbo Diesel	Ulazna sila	100 kN
Snaga	175 Kw	Izlazna sila	60 kN
Broj okretaja		Unutarnji R bubnja	200 mm
Spojka	Hydrostatic-mech. drive	Vanjski R bubnja	400 mm
Mjenjač	2-gear transfer box gearing	Duljina užeta	80 m
Osovina	NAF planetary axle with differential lock 100%, axle load distribution: in %: 60:40. Tractive power 250 kN	Promjer užeta	14 mm
Upravljanje	Hyd. articulated frame steering	Pomoćno uže	-
Kočnice	Service brake: 4 multi-disc brake; Fixing brake: spring-loaded brake	Prosječna brzina užeta	2,50 m/s
Spremnik	160 Litara	Pogon	Hydrostatic
Prednja odzivna daska	Hydr. front logging pan	Reduktor vitla	Worm wheel gear box or spur gear
Stražnja odzivna daska	Hydr. liftable and lowerable	Spojka vitla	Self adjusting disc clutch
Gume	23.1 x 26 min	Kočnica vitla	Spring-loaded band brake
Sigurnosni sistem	Comfort cabin ROPS/FOPS tested	Upravljač vitla	Electrohyd. with push-button control
Duljina širina visina	6870 mm 2360 mm 3170 mm		
Visina težišta			
Radius okretanja			
Clearance	595 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa	10300 kg	
Ostalo	Skidding crane		
Cijena	245200 €		

HSM 904 6 WD

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.d



TEHNIČKI DETALJI

Tip	Articulated steered forestry tractor, frame structured design, all-wheel drive and double drum winch	Vitlo	Electronic-hydraulic double drum winch Typ ADLER HY 20
Motor	IVECO NEF 6 Zyl. Common Rail Turbo Diesel	Ulazna sila	100 kN
Snaga	175 Kw	Izlazna sila	60 kN
Broj okretaja		Unutarnji R bubnja	200 mm
Spojka	Hydrostatic-mech. drive	Vanjski R bubnja	400 mm
Mjenjač	2-gear transfer box gearing	Duljina užeta	80 m
Osovina	NAF planetary axle with differential lock 100%, axle load distribution: in %: 50:50. Tractive power 250 Kn	Promjer užeta	14 mm
Upravljanje	Hyd. articulated frame steering. Twist lock	Pomoćno uže	-
Kočnice	Service brake: 4 multi-disc brake; Fixing brake: spring-loaded brake	Prosječna brzina užeta	2,50 m/s
Spremnik	145 Litara	Pogon	Hydrostatic
Prednja odzivna daska	Hydr. front logging pan (optional: tiltable)	Reduktor vitla	Worm wheel gear box or spur gear
Stražnja odzivna daska	Hydr. liftable and lowerable	Spojka vitla	Self adjusting disc clutch
Gume	Front: 23,1 x 26 16PR / Rear: 710/45 – 26,5 T422 SB	Kočnica vitla	Spring-loaded band brake
Sigurnosni sistem	Comfort cabin ROPS/FOPS tested	Upravljač vitla	Electrohyd. with push-button control
Duljina širina visina	8300 mm 2600 mm 3170 mm		
Visina težišta			
Radius okretanja			
Clearance	595 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa	16300 kg	
Ostalo	Skidding crane		
Cijena	267900 €		

HSM 904 Z

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Tip	4 same size wheels. All wheel drive and single-drum winch and 150° swing grapple	Vitlo	Electronic-hydraulic single drum winch
Motor	IVECO NEF 6 Zyl. Common Rail Turbo Diesel	Ulazna sila	100 kN
Snaga	175 Kw	Izlazna sila	60 kN
Broj okretaja		Unutarnji R bubnja	168 mm
Spojka	Hydrostatic-mech. drive	Vanjski R bubnja	370 mm
Mjenjač	2-gear transfer box gearing	Duljina užeta	80 m
Osovina	NAF planetary axle with differential lock 100%, axle load distribution: in %: 60:40.	Promjer užeta	14 mm
Upravljanje	Hyd. articulated frame steering.	Pomoćno uže	-
Kočnice	Service brake: 4 multi-disc brake; Fixing brake: spring-loaded brake	Prosječna brzina užeta	2,50 m/s
Spremnik	145 Litara	Pogon	Hydrostatic
Prednja odzivna daska	Hydr. front logging pan (optional: tiltable)	Reduktor vitla	Worm wheel gear box or spur gear
Stražnja odzivna daska	Hydr. liftable and lowerable	Spojka vitla	Self adjusting disc clutch
Gume	Front and rear 23.1 - 26, 16 pr	Kočnica vitla	Spring-loaded band brake
Sigurnosni sistem	Comfort cabin ROPS/FOPS tested	Upravljač vitla	
Duljina širina visina	6260 mm 2360 mm 3170 mm		
Visina težišta			
Radius okretanja			
Clearance	595 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa 12300 kg		
Ostalo	dual telescopic swing grapple		
Cijena	273900 €		

HSM 904 ZL

HOHENLOHER Spezial-Maschinenbau
GmbH & Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Tip	4 wheel drive. Single-drum winch and 210° single telescopic swing grapple with outer boom crane	Vitlo	Electronic-hydraulic single drum winch Adler EHY 10
Motor	IVECO NEF 6 Zyl. Common Rail Turbo Diesel	Ulazna sila	100 kN
Snaga	175 Kw	Izlazna sila	60 kN
Broj okretaja		Unutarnji R bubnja	168 mm
Spojka	Hydrostatic-mech. drive	Vanjski R bubnja	370 mm
Mjenjač	2-gear transfer box gearing	Duljina užeta	80 m
Osovina	NAF planetary axle with differential lock 100%, axle load distribution: in %: 60:40.	Promjer užeta	14 mm
Upravljanje	Hyd. articulated frame steering.	Pomoćno uže	-
Kočnice	Service brake: 4 multi-disc brake; Fixing brake: spring-loaded brake	Prosječna brzina užeta	2,50 m/s
Spremnik	145 Litara	Pogon	Hydrostatic
Prednja odzivna daska	Hydr. front logging pan (optional: tiltable)	Reduktor vitla	Worm wheel gear box or spur gear
Stražnja odzivna daska	Hydr. liftable and lowerable	Spojka vitla	Self adjusting disc clutch
Gume	Front and rear 23.1 - 26, 16 pr	Kočnica vitla	Spring-loaded band brake
Sigurnosni sistem	Comfort cabin ROPS/FOPS DIN EN ISO 8082 tested	Upravljač vitla	Electrohyd. with push-button control
Duljina širina visina	6460 mm 2360 mm 3300 mm		
Visina težišta			
Radius okretanja			
Clearance	636 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa	13600 kg	
Ostalo	dual telescopic swing grapple; range: 7.2m		
Cijena	296200 €		

JOHN DEERE 640 H

JOHN DEERE

Davenport

USA

Internet: <http://www.deere.com/>



TEHNIČKI DETALJI

Tip	4 same size wheels. All wheel drive and single-drum winch	Vitlo	Electrohydraulic single-drum winch JOHN DEERE Typ 4000
Motor	Water-cooled JOHN DEERE Typ 6068H PowerTech Plus 6-cylinder-Common Rail-Turbodiesel	Ulazna sila	182 kN
Snaga	128 Kw	Izlazna sila	109 kN
Broj okretaja	2200 1/min	Unutarnji R bubnja	
Spojka	single disc dry clutch	Vanjski R bubnja	
Mjenjač	Powershift gear unit, 8 forward and 7 reverse gears	Duljina užeta	77 m
Osovina	Power axis with planetary drive and differential lock.	Promjer užeta	16 mm
Upravljanje	Hyd. articulated frame steering.	Pomoćno uže	54m/19 mm
Kočnice	service brake: oil cooled multiple disc.br Fixing brake: multiple disc break with spring-loaded brake	Prosječna brzina užeta	0,96 m/s
Spremnik	155 Litara	Pogon	Mechanical
Prednja odzivna daska	Hydr.,tiltable via 2 hydraulic cylinder	Reduktor vitla	Via transfer box gearing
Stražnja odzivna daska	Static; optional: adjustable	Spojka vitla	Hyd. multi disc clutch in oil bath
Gume	28L – 26	Kočnica vitla	Hyd. multi disc break in oil bath
Sigurnosni sistem	protection cabin, tilt able	Upravljač vitla	Electrohyd. single-lever control
Duljina širina visina	7230 mm 3000 mm 3023 mm		
Visina težišta			
Radius okretanja	5,7 m		
Clearance	514 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa 13745 kg		
Ostalo	dual telescopic swing grapple; range: 7.2m		
Cijena	160000 €		

PFANZELT FELIX 140 - 2

PFANZELT-Maschinenbau
Frankau 17
D-87675 Rettenbach/Allgäu
Njemačka
Tel.: +49(0)8860/92170 Fax: 9217-17
E-mail: info@pfanzelt-maschinenbau.de
Internet: www.pfanzelt-maschinenbau.de



TEHNIČKI DETALJI

Tip	Šumarski traktor 4 kotača, pogon na svim kotačima 40 km/h			Vitlo	Elektro-hidra PFLANZELT dvobubanjско vitlo	
Motor	MAN dizel motor, 4 cilindra. EURO3			Ulazna sila	100 kN	
Snaga	103 kW			Izlazna sila		
Broj okretaja	2300 1/min			Unutarnji R bubnja	225 mm	
Spojka	-			Vanjski R bubnja	380 mm	
Mjenjač	ZF S-MaticGearboxupto 40 km/h reduktor			Duljina užeta	100 m	
Osovina	KESSLER osovina			Promjer užeta	12 mm	
Upravljanje	Kingpin upravljanje, na svim kotačima – crab upravljanje. Kontrolirano preko volana ili joysicka			Pomoćno uže		
Kočnice	Uljne mulri disk kočice; učvršćene pomoću opruge kočnice			Prosječna brzina užeta	0,4 m/s	
Spremnik	170 Litara			Pogon	Meh.	
Prednja odrivna daska				Reduktor vitla	Pužni reduktor vitla	
Stražnja odrivna daska	Moguće podizanje i spuštanje			Spojka vitla	Hidr.sinter spojke, samopodesive	
Gume	600/60-30,5 14 PR			Kočnica vitla	Hidr. multi disk kočnice	
Sigurnosni sistem	Udobnost kabinetest FOPS/ROPS			Upravljač vitla	Elek-hidras kontrolnim tipkama ili daljinskim upravljačem	
Duljina širina visina	5800 mm	550 mm	3300 mm			
Visina težišta						
Radius okretanja						
Clearance	550 mm					
Masa	Pred.Osovin					
	Straž.Osovin					
	Net masa	10500 kg				
Ostalo	Dizalica TypPfanzelt RZ 7173, doseg: 7.3m; moment: 81kNm					
Cijena	€					

PFANZELT PM-TRAC 2360

PFANZELT-Maschinenbau
Frankau 17
D-87675 Rettenbach/Allgäu
Njemačka
Tel.: +49(0)8860/92170 Fax: 9217-17
E-mail: info@pfanzelt-maschinenbau.de
Internet: www.pfanzelt-maschinenbau.de



TEHNIČKI DETALJI

Tip	System forestry tractor with crane and winch for Long wood	Vitlo	Electro-hydraulic PFLANZELT double drum winch
Motor	SISU 6-cylinder-Diesel engine. TIER3	Ulazna sila	100 kN
Snaga	118 kW	Izlazna sila	
Broj okretaja	2400 1/min	Unutarnji R bubnja	225 mm
Spojka	-	Vanjski R bubnja	380 mm
Mjenjač	ZF S-Matic Gearbox upto 50 km/h reversing gear unit	Duljina užeta	100 m
Osovina	CARRARO/CASE-STEYR	Promjer užeta	12 mm
Upravljanje	Kingpin steering	Pomoćno uže	
Kočnice	Service brake: wet multi-disc brake Fixing brake: spring-loaded brake	Prosječna brzina užeta	0,7 m/s
Spremnik	170 Litara	Pogon	Mehanički
Prednja odzivna daska	Optional	Reduktor vitla	Worm wheel gear box
Stražnja odzivna daska	Lift- and lower able	Spojka vitla	Hydraulic sinter clutch, self-adjusting
Gume	540/65 R28/650/65 R38	Kočnica vitla	Hydraulic multi-disc brake
Sigurnosni sistem	Comfort cabin FOPS and ROPS tested	Upravljač vitla	Electro-hydraulic via push-button control or remote control
Duljina širina visina	5705 mm 2550 mm 3130 mm		
Visina težišta			
Radius okretanja	11,2 m		
Clearance	490 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa 11500 kg		
Ostalo	Skidding crane Typ Pfanzelt RZ 7173, range 8.5m; lifting power 81kNm		
Cijena	218000 €		

PFANZELT PM-TRAC 2395

PFANZELT-Maschinenbau
Frankau 17
D-87675 Rettenbach/Allgäu
Njemačka
Tel.: +49(0)8860/92170 Fax: 9217-17
E-mail: info@pfanzelt-maschinenbau.de
Internet: www.pfanzelt-maschinenbau.de



TEHNIČKI DETALJI

Tip	System forestry tractor with crane and winch for Long wood	Vitlo	Electro-hydraulic PFLANZELT double drum winch
Motor	SISU 6-cylinder-Diesel engine. TIER3	Ulazna sila	100 kN
Snaga	144 kW	Izlazna sila	
Broj okretaja	2400 1/min	Unutarnji R bubnja	225 mm
Spojka	-	Vanjski R bubnja	380 mm
Mjenjač	ZF S-Matic Gearbox upto 50 km/h reversing gear unit	Duljina užeta	100 m
Osovina	CARRARO/CASE-STEYR	Promjer užeta	12 mm
Upravljanje	Kingpin steering	Pomoćno uže	
Kočnice	Service brake: wet multi-disc brake Fixing brake: spring-loaded brake	Prosječna brzina užeta	0,7 m/s
Spremnik	170 Litara	Pogon	Mehanički
Prednja odzivna daska	Optional	Reduktor vitla	Worm wheel gear box
Stražnja odzivna daska	Lift- and lower able	Spojka vitla	Hydraulic sinter clutch, self-adjusting
Gume	540/65 R28/650/65 R38	Kočnica vitla	Hydraulic multi-disc brake
Sigurnosni sistem	Comfort cabin FOPS and ROPS tested	Upravljač vitla	Electro-hydraulic via push-button control or remote control
Duljina širina visina	5705 mm 2550 mm 3130 mm		
Visina težišta			
Radius okretanja	11,2 m		
Clearance	490 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa 11900 kg		
Ostalo	Skidding crane Typ Pfanzelt RZ 7169, range 6.9m; lifting power 102kNm		
Cijena	229000 €		

WELTE 130 M

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	6-wheel forestry tracto . All wheel drive, swing skidding crane and double-drum winch.	Vitlo	Welte-double drum winch HZM 14 tractive power:14 t
Motor	Deutz 4-cylinder watercooled TCD 2013 with Turbo and charge air cooling	Ulazna sila	
Snaga	113 kW	Izlazna sila	
Broj okretaja	2300 1/min	Unutarnji R bubnja	
Spojka	-	Vanjski R bubnja	
Mjenjač	Hydrostatic 2-gear, gear unit with axle disconnect system	Duljina užeta	
Osovina	NAF planetary axle and bogie axle with wet multi-disc brakes	Promjer užeta	
Upravljanje	Articulated frame steering	Pomoćno uže	
Kočnice	Dual-circuit brake System, fixing brake: spring-loaded brake	Prosječna brzina užeta	
Spremnik	160 Litara	Pogon	Hidrostatski
Prednja odzivna daska		Reduktor vitla	Worm wheel gear box
Stražnja odzivna daska	Hydr. adjustable in inclination and lift- and lowerable	Spojka vitla	Multiple disc dry clutch
Gume	Front – 600/60 – 30,5 – Trelleborg T414 Rear – 600/50 – 22,5 – Nokian TRS-LS2	Kočnica vitla	Spring-loaded brake
Sigurnosni sistem	Comfort cabin FOPS and ROPS tested	Upravljač vitla	
Duljina širina visina	8000 mm 2500 mm 3440 mm		
Visina težišta			
Radius okretanja	4,1 m		
Clearance	565 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa		
Ostalo			
Cijena	€		

WELTE 130 T

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	Articulated steered 6-wheel forestry tractor	Vitlo
Motor	Deutz 4-cylinder watercooled TCD 2013	Ulazna sila
Snaga	113 Kw	Izlazna sila
Broj okretaja	2300 1/min	Unutarnji R bubnja
Spojka	-	Vanjski R bubnja
Mjenjač	Hydrostatic traction drive with electronic output-regulation	Duljina užeta
Osovina	NAF axle with 100% differential lock	Promjer užeta
Upravljanje	Articulated frame steering	Pomoćno uže
Kočnice	Dual-circuit brake System, fixing brake: spring-loaded brake	Prosječna brzina užeta
Spremnik	160 Litara	Pogon
Prednja odzivna daska		Reduktor vitla
Stražnja odzivna daska		Spojka vitla
Gume	Front – 600/60 – 30,5 – Trelleborg T414 Rear – 600/50 – 22,5 – Nokian TRS-LS2	Kočnica vitla
Sigurnosni sistem	Steel protection cabin	Upravljač vitla
Duljina širina visina	8366 mm 2500 mm 3440 mm	
Visina težišta		
Radius okretanja	4,4 m	
Clearance	580 mm	
Masa	Pred.Osovin	
	Straž.Osovin	
	Net masa	
Ostalo		
Cijena	€	

WELTE 140 K,M,T

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	Articulated steered 8-wheel forestry tractor, frame structured design . All wheel drive, swing skidding crane and double-drum winch			Vitlo	Double drum winch HZM 14
Motor	Deutz 4-cylinder watercooled TCD 2013			Ulazna sila	70 kN
Snaga	129 Kw			Izlazna sila	70 kN
Broj okretaja	2300 1/min			Unutarnji R bubnja	195 mm
Spojka	-			Vanjski R bubnja	385 mm
Mjenjač				Duljina užeta	100 m
Osovina	NAF planetary and bogie axle with multi-disc brake			Promjer užeta	13 mm
Upravljanje	Articulated frame steering with double acting cylinders and end stop damping			Pomoćno uže	
Kočnice	Dual-circuit brake System, fixing brake: spring-loaded brake			Prosječna brzina užeta	0,66 m/s
Spremnik	215 Litara			Pogon	Hidrostatska
Prednja odrivna daska				Reduktor vitla	Worm wheel gear box
Stražnja odrivna daska				Spojka vitla	Multiple disc dry clutch
Gume	Front and Rear 600/50-22,5 Nokian TRS-LS 2			Kočnica vitla	Spring-loaded brake
Sigurnosni sistem				Upravljač vitla	Electrohydraulic
Duljina	širina	visina	7925 mm	2500 mm	3650 mm
Visina težišta					
Radius okretanja					
Clearance		640 mm			
Masa		Pred.Osovin			
		Straž.Osovin			
		Net masa			
Ostalo					
Cijena		€			

WELTE 100.2 SIB

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	Articulated special forest tractors with SIB gear			Vitlo	Welte double drum winch HZM 14 with a tensile force of 14 t
Motor	Deutz 4-cylinder water-cooled TCD 3.6 L4F			Ulazna sila	70 kN
Snaga	100 Kw			Izlazna sila	
Broj okretaja	2000 1/min			Unutarnji R bubnja	
Spojka	-			Vanjski R bubnja	
Mjenjač	Hydrostatic drive with electronic power control 2-speed gearbox			Duljina užeta	
Osovina	front and rear 100% separated switchable differential locks			Promjer užeta	
Upravljanje	Articulated frame steering			Pomoćno uže	
Kočnice	Two-circuit brake system, spring-loaded parking brake			Prosječna brzina užeta	
Spremnik	185 Litara			Pogon	
Prednja odrivna daska	Front Shield with 2.15 m lifting height and a lifting capacity of max. 38 kN			Reduktor vitla	
Stražnja odrivna daska	Hydraulically adjustable rear shield with roller carrier and 2 endlessly revolving Double rolls propellers			Spojka vitla	
Gume	front - 600/60 - 30.5 - Trelleborg T 414 Rear - 600/60 - 30.5 - Trelleborg T414			Kočnica vitla	
Sigurnosni sistem				Upravljač vitla	
Duljina	širina	visina	6130 mm	2500 mm	3080 mm
Visina težišta					
Radius okretanja					
Clearance				520 mm	
Masa				Pred.Osovin	
				Straž.Osovin	
				Net masa	11200 kg
Ostalo					
Cijena		€			

WELTE W110/W130

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	Articulated steered forestry tractor, frame structured design with 4 same size wheels	Vitlo	Welte double drum winch HZM 14 with a tensile force of 14 t
Motor	Watercooled DEUTZ 4-Zylinder-TCD 2013 Dieselenigne	Ulazna sila	80 kN
Snaga	113 Kw	Izlazna sila	70 kN
Broj okretaja	2300 1/min	Unutarnji R bubnja	
Spojka	-	Vanjski R bubnja	
Mjenjač	Hydrostatic drive with electronic output-regulation	Duljina užeta	100 m
Osovina	NAF planetary axle with 100% differential lock	Promjer užeta	12 mm
Upravljanje	Articulated steering, with emergency steering	Pomoćno uže	
Kočnice	Multi-disc brake; fixing brake: spring-loaded brake	Prosječna brzina užeta	0,66 m/s
Spremnik	160 Litara	Pogon	Hidrostatski
Prednja odzivna daska	Hydraulic. Lift height: 1,80 m	Reduktor vitla	Worm wheel gear box
Stražnja odzivna daska	Hydr. lift- and lowerable, integrated high lead	Spojka vitla	Multiple disc dry clutch
Gume	600/60 - 30.5	Kočnica vitla	Spring-loaded brake
Sigurnosni sistem	Steel protection cabin	Upravljač vitla	Radio remote control
Duljina širina visina	5941 mm 2500 mm 2965 mm		
Visina težišta			
Radius okretanja	2,4 m		
Clearance	580 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa		
Ostalo			
Cijena	€		

WELTE W180/W230 Lastschaltgetriebe

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip			4 same size wheels. All wheel drive, swing skidding crane			Vitlo	Welte double drum winch HZM 14 with a tensile force of 14 t
Motor			Deutz 6-cylinder wassergekühlter TCD 2013			Ulazna sila	100 kN
Snaga			173 Kw			Izlazna sila	80 kN
Broj okretaja						Unutarnji R bubnja	195 mm
Spojka			Torque converter			Vanjski R bubnja	385 mm
Mjenjač			ZF power shift reversing gear unit with torque converter and lock-up clutch			Duljina užeta	100 m
Osovina			NAF planetary axle with 100% differential lock			Promjer užeta	13 mm
Upravljanje			Articulated frame steering with double acting cylinders and end stop damping			Pomoćno uže	130m/11mm cable diameter
Kočnice			Multi-disc brake; fixing brake: spring-loaded brake			Prosječna brzina užeta	0,66 m/s
Spremnik			180 Litara			Pogon	Hidrostatski
Prednja odrivna daska			Hydraulic. Lift height: 1,53 m; Lifting power: max. 45 kN			Reduktor vitla	Worm wheel gear box
Stražnja odrivna daska			Static shield with gear box			Spojka vitla	Multible disc dry clutch
Gume			Front, rear: 23.1 – 26			Kočnica vitla	Spring-loaded brake
Sigurnosni sistem			Steel protection cabin			Upravljač vitla	Electro-hydraulic
Duljina	širina	visina	6455 mm	2500 mm	3175 mm		
Visina težišta							
Radius okretanja			2,9 m				
Clearance			620 mm				
Masa			Pred.Osovin				
			Straž.Osovin				
			Net masa		12000 kg		
Ostalo							
Cijena			€				

WELTE W180/W230 Welmatik

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	4 same size wheels. All wheel drive, swing skidding crane	Vitlo	Welte double drum winch HZM 14 with a tensile force of 14 t
Motor	Deutz 6-cylinder wassergekühlter TCD 2013	Ulazna sila	80 kN
Snaga	173 Kw	Izlazna sila	70 kN
Broj okretaja	2300 U/min	Unutarnji R bubnja	210 mm
Spojka		Vanjski R bubnja	195 mm
Mjenjač	Hydrostatic drive with electronic output-regulation; 2 gear - transfer box gearing with 2 engines	Duljina užeta	100 m
Osovina	NAF planetary axle with 100% differential lock	Promjer užeta	13 mm
Upravljanje	Articulated steering, with emergency steering	Pomoćno uže	130m/11mm cable diameter
Kočnice	Multi-disc brake; fixing brake: spring-loaded brake	Prosječna brzina užeta	0,66 m/s
Spremnik	180 Litara	Pogon	Hidroulički
Prednja odzivna daska	Hydraulic. Lift height: 1,53 m; Lifting power: max. 45 kN	Reduktor vitla	Worm wheel gear box
Stražnja odzivna daska	Static with gear box	Spojka vitla	Multiple disc dry clutch
Gume	Front, rear: 23.1 – 26	Kočnica vitla	Spring-loaded brake
Sigurnosni sistem	Steel protection cabin	Upravljač vitla	Radio remote
Duljina širina visina	6455 mm 2500 mm 3175 mm		
Visina težišta			
Radius okretanja	2,9 m		
Clearance	630 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa 12000 kg		
Ostalo			
Cijena	€		

WELTE W210 Welmatik

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	Articulated steered 6-wheel forestry tractor, frame structured design with all wheel drive, skidding crane	Vitlo	Welte double drum winch HZM 14
Motor	Deutz 6-cylinder wassergekühlter TCD 2013	Ulazna sila	100 kN
Snaga	173 Kw	Izlazna sila	80 kN
Broj okretaja	2300 U/min	Unutarnji R bubnja	210 mm
Spojka	Torque converter	Vanjski R bubnja	195 mm
Mjenjač	Hydrostatic drive with electronic output-regulation; 2 gear - transfer box gearing with 2 engines	Duljina užeta	100 m
Osovina	NAF planetary axle with 100% differential lock	Promjer užeta	13 mm
Upravljanje	Hydraulic articulated steering	Pomoćno uže	130m/11mm cable diameter
Kočnice	Multi-disc brake; fixing brake: spring-loaded brake	Prosječna brzina užeta	0,66 m/s
Spremnik	180 Litara	Pogon	Hydraulic
Prednja odzivna daska	Hydraulic. Lift height: 1,53 m; Lifting power: max. 45 kN	Reduktor vitla	Worm wheel gear box
Stražnja odzivna daska	Hydr. lift and lowerable, adjustable in inclination	Spojka vitla	Multiple disc dry clutch
Gume	Front: 23.1 – 26 rear 600/55-26,5	Kočnica vitla	Hydr. band brake
Sigurnosni sistem	Steel protection cabin	Upravljač vitla	Electro- hydr
Duljina širina visina	8810 mm 2500 mm 3630 mm		
Visina težišta			
Radius okretanja	4,5 m		
Clearance	630 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa kg		
Ostalo	Skidding crane Typ Loglift FT 111 range 8.5m; Lifting power: 151 kN. Extras available		
Cijena	€		

WELTE W240 Welmatik Titan

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: +49(0)7665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip	Articulated steered 8-wheel forestry tractor, frame structured design with all wheel drive, skidding crane	Vitlo
Motor	Deutz 6-cylinder wassergekühlter TCD 2013	Ulazna sila
Snaga	200 kW	Izlazna sila
Broj okretaja	2300 U/min	Unutarnji R bubnja
Spojka		Vanjski R bubnja
Mjenjač	Hydrostatic drive with electronic output-regulation; 2 gear - transfer box gearing with 2 engines	Duljina užeta
Osovina	NAF planetary axle with 100% differential lock	Promjer užeta
Upravljanje	Hydraulic articulated steering	Pomoćno uže
Kočnice	Multi-disc brake; fixing brake: spring-loaded brake	Prosječna brzina užeta
Spremnik	280 Litara	Pogon
Prednja odzivna daska		Reduktor vitla
Stražnja odzivna daska		Spojka vitla
Gume	Front; rear 600/55-26,5	Kočnica vitla
Sigurnosni sistem	Steel protection cabin	Upravljač vitla
Duljina širina visina	9600 mm 2600 mm 3800 mm	
Visina težišta		
Radius okretanja	6 m	
Clearance	560 mm	
Masa	Pred.Osovin	
	Straž.Osovin	
	Net masa kg	
Ostalo		
Cijena	€	

WELTE W130 K

WELTE Fahrzeugbau G.m.b.H.
Am Gansacker 8
D-79224 Umkirch
Njemačka
Tel.: 07665/9437-0
Internet: www.welte.de



TEHNIČKI DETALJI

Tip		Vitlo	Welte-double drum winch HZM 14
Motor	Deutz 4-cylinder	Ulazna sila	
Snaga	113 KW	Izlazna sila	
Broj okretaja	2300 1/min	Unutarnji R bubnja	
Spojka	Torque converter	Vanjski R bubnja	
Mjenjač	2-gear, gear unit with axle disconnect system	Duljina užeta	
Osovina	NAF planetary axle and bogie axle with wet multi-disc brakes	Promjer užeta	
Upravljanje	Hydrostatic articulated steering	Pomoćno uže	
Kočnice	Dual-circuit brake System, fixing brake: spring-loaded brake	Prosječna brzina užeta	
Spremnik	160 Litara	Pogon	Hydrostatic
Prednja odzivna daska	Hydr. tiltable front logging pan	Reduktor vitla	
Stražnja odzivna daska	Hydr. liftable and lowerable, with integrated high lead; lifting power 83 kN	Spojka vitla	Multiple disc dry clutch
Gume	Front – 600/60 – 30,5 – Trelleborg T414 Rear – 600/50 – 22,5 – Nokian TRS-LS2	Kočnica vitla	Spring-loaded brake
Sigurnosni sistem	Steel protection cabin	Upravljanje	Remote control
Duljina širina visina	7130 mm 2500 mm 3440 mm		
Visina težišta			
Radius okretanja	3,4 m		
Clearance	580 mm		
Masa	Pred.Osovin		
	Straž.Osovin		
	Net masa		
Ostalo			
Cijena			

KATALOG FORVARDERA



1. ECO LOG	1
2. FELIX	5
3. GREMO	7
4. HSM	9
5. JOHN DEERE	19
6. KOMATSU	24
7. LOGSET	31
8. PONSSE	36
9. ROTTNE	44
10. SILVATEC	49
11. STEFAN	50

ECO LOG 554 C

ECO LOG Schweden AB
Box 84, Norra Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	MERCEDES-BENZ OM 904 LA.	
Snaga	129 kW	
Transmisija	Hidrostatsko-mehanička. 2 brzine vožnje, ručna pomična blokada diferencijala; vučna snagu: 140kN	
Osovina	Portal-bogie osovina (prednja i stražnja), mehanički zupčani pogon	
Upravljanje	Hidrostatsko	
Kočnice	Hidraulične kočnice s više diskova podmazivane uljem, učvršćene oprugom	
Hidraulični sistem	Load sensing hydr. System	
Kapacitet pumpe	140 l/min.	
Radni tlak		
Hidraulični spremnik	145 Litara	
Spremnik za gorivo	148 Litara	
Gume	Prednje/stražnje: 600/50 - 22.5. Optional: 710/50 - 22,5	
Nosivost	10000 kg	
Duljina	9246 mm	
Širina	2630 mm	
Visina	3583 mm	
Radius okretanja	-	
Odignutost od tla	590 mm	
Dizalica	Tip	Hinged bracket telescopic crane
	Doseg	7,2/8,5/10 m
	Moment	78kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	12000 kg
Ostalo		
Cijena	230000 €	

ECO LOG 564 C

ECO LOG Schweden AB
Box 84, Norra Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI

Broj kotača	8	
Motor	MERCEDES-BENZ OM 906 LA.	
Snaga	150 kW	
Transmisija	Hidrostatsko-mehanička. 2 brzine vožnje, ručna pomična blokada diferencijala; vučna snagu: 155kN	
Osovina	NAF-bogie osovina (prednja i stražnja), mehanički zupčani pogon	
Upravljanje	Hidrostatsko	
Kočnice	Hidraulične kočnice s više diskova podmazivane uljem, učvršćene oprugom	
Hidraulični sistem	Load sensing hydr. System	
Kapacitet pumpe	210 l/min.	
Radni tlak		
Hidraulični spremnik	145 Litara	
Spremnik za gorivo	150 Litara	
Gume	Prednje/stražnje: 600/55 - 26.5. Optional: 710/50 - 26,5	
Nosivost	12000 kg	
Duljina	9063 mm	
Širina	2650 mm	
Visina	3685 mm	
Radijus okretanja	-	
Odignutost od tla	659 mm	
Dizalica	Tip	Loglift Typ F 71 – Hinged bracket telescopic crane
	Doseg	7,2/8,5/10 m
	Moment	78kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	16800 kg
Ostalo		
Cijena	250000 €	

ECO LOG 574 C

ECO LOG Schweden AB
Box 84, Norra Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI

Broj kotača	8	
Motor	MERCEDES-BENZ OM 906 LA.	
Snaga	150 kW	
Transmisija	Hidrostatsko-mehanička. 2 brzine vožnje, ručna pomična blokada diferencijala; vučna snagu: 185kN	
Osovina	NAF-bogie osovina (prednja i stražnja), mehanički zupčani pogon	
Upravljanje	Hidrostatsko	
Kočnice	Hidraulične kočnice s više diskova podmazivane uljem, učvršćene oprugom	
Hidraulični sistem	Load sensing hydr. system	
Kapacitet pumpe	210 l/min.	
Radni tlak		
Hidraulični spremnik	145 Litara	
Spremnik za gorivo	150 Litara	
Gume	Prednje/stražnje: 600/55 - 26.5. Optional: 710/50 - 26,5	
Nosivost	14000 kg	
Duljina	9202 mm	
Širina	2670 mm	
Visina	3860 mm	
Radius okretanja	-	
Odignutost od tla	650 mm	
Dizalica	Tip	Loglift Typ F 71 - Hinged bracket telescopic crane
	Doseg	7,2/8,5/10 m
	Moment	78kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	17000 kg
Ostalo	verzija sa 6 kotača, snaga motora 205 kW	
Cijena	270000 €	

ECO LOG 594 C

ECO LOG Schweden AB
Box 84, Norra Hamngatan 41
SE-826 22 Söderhamn
Švedska
<http://www.eco-log.se/>



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	MERCEDES-BENZ OM 906 LA.	
Snaga	220 kW	
Transmisija	Hidrostatsko-mehanička. 2 brzine vožnje, ručna pomična blokada diferencijala; vučna snagu: 240kN	
Osovina	NAF-bogie osovina (prednja i stražnja), mehanički zupčani pogon	
Upravljanje	Hidrostatsko	
Kočnice	Hidraulične kočnice s više diskova podmazivane uljem, učvršćene oprugom	
Hidraulični sistem	Load sensing hydr. System	
Kapacitet pumpe	250 l/min.	
Radni tlak		
Hidraulični spremnik	180 Litara	
Spremnik za gorivo	220 Litara	
Gume	Prednje/stražnje: 750/50 - 26.5	
Nosivost	19000 kg	
Duljina	10250 mm	
Širina	3060 mm	
Visina	3900 mm	
Radius okretanja	-	
Odignutost od tla	710 mm	
Dizalica	Tip	Loglift Typ F 111 - Hinged bracket telescopic crane
	Doseg	8,5 m
	Moment	151 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	21800 kg
Ostalo	Verzija sa 6 kotača	
Cijena	-	

FELIX 145 VS - Kombimaschine

PFANZELT-Maschinenbau
 Frankau 17
 D-87675 Rettenbach/Allgäu
 Njemačka
 Tel.: +49(0)8860/92170 Fax: 9217-17
 E-mail: info@pfanzelt-maschinenbau.de
 Internet: <http://www.pfanzelt-maschinenbau.de/>



TEHNIČKI DETALJI		
Broj kotača	4	
Motor	MAN, 4-cilindrični dizel motor s vodenim hlađenjem	
Snaga	132 kW	
Transmisija	ZF S-Matic gear box 0-40 km/h; reversing gear unit	
Osovina	KESSLER – osovina	
Upravljanje	Articulated - kingpin steering; all wheel crab steering, controlable via steering wheel or joystick	
Kočnice	System Brakes: wet multiple disc brake	
Hidraulični sistem	Load sensing	
Kapacitet pumpe	180 l/min.	
Radni tlak		
Hidraulični spremnik	70 Litara	
Spremnik za gorivo	170 Litara	
Gume	Prednje/stražnje: 620/75 – 26	
Nosivost	10000 kg	
Duljina	6120 mm	
Širina	2550 mm	
Visina	3750 mm	
Radijus okretanja	-	
Odignutost od tla	540 mm	
Dizalica	Tip	Typ Pfanzelt crane RZ 7185 EHS 0,36 m ²
	Doseg	8,5 m
	Podizni moment	81 kNm
	Okretni moment	28 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	14000 kg
Ostalo	Pfanzelt dvostruko vitlo 2 x 6/8/10t s 150m uzeta po vitlu, ergonomska kabina	
Cijena	2378000 €	

FELIX 180-6 WD V - Kombimaschine

PFANZELT-Maschinenbau
 Frankau 17
 D-87675 Rettenbach/Allgäu
 Njemačka
 Tel.: +49(0)8860/92170 Fax: 9217-17
 E-mail: info@pfanzelt-maschinenbau.de
 Internet: <http://www.pfanzelt-maschinenbau.de/>



TEHNIČKI DETALJI		
Broj kotača	6	
Motor	MAN, 4-cilindrični dizel motor s vodenim hlađenjem	
Snaga	132 kW	
Transmisija	ZF S-Matic gear box 0-40 km/h; reversing gear unit	
Osovina	KESSLER – osovina	
Upravljanje	Articulated - kingpin steering; controlable via steering wheel or joystick	
Kočnice	System Brakes: wet multiple disc brake	
Hidraulični sistem	Load sensing	
Kapacitet pumpe	180 l/min.	
Radni tlak		
Hidraulični spremnik	70 Litara	
Spremnik za gorivo	170 Litara	
Gume	Prednje: 620/75 – 26, stražnje: 700/45 – 22,5	
Nosivost	10000 kg	
Duljina	6670 mm	
Širina	2550 mm	
Visina	3750 mm	
Radijus okretanja	-	
Odignutost od tla	540 mm	
Dizalica	Tip	Typ Pfanzelt crane RZ 7185 EHS 0,36 m ²
	Doseg	8,5 m
	Podizni moment	81 kNm
	Okretni moment	28 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	12500 kg
Ostalo	Pfanzelt dvostruko vitlo 2 x 6/8/10t s 150m uzeta po vitlu, ergonomska kabina	
Cijena	237800 €	

GREMO 1050 F

GREMO AB
Box 44
S-31061 Ätran
Švedska
Tel.: 0046(0)346/60515
Fax: 0046(0)346/60342
E-mail: info@gremo.se
Internet: www.gremo.com



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	CUMMINS QSB, vodeno hlađenje, 4 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	120 kW	
Transmisija	Hydros.-mech. power Transmission with 2 Phase Powershift gear unit. Manual differential lock; tractive power: 125 kN	
Osovina	Bogie osovina s mjenjačem	
Upravljanje	Power assisted steering, elec. proportional all Terrain steering	
Kočnice	Four multi-disc brakes in oil bath. Park brake: all multi-disc brakes	
Hidraulični sistem	Load detection hyd. System	
Kapacitet pumpe	105 l/min.	
Radni tlak		
Hidraulični spremnik	150 Litara	
Spremnik za gorivo	123 Litara	
Gume	Prednje/ stražnje: 710/40 – 22,5	
Nosivost	10500 kg	
Duljina	8825 mm	
Širina	2760 mm	
Visina	3452 mm	
Radijus okretanja	-	
Odignutost od tla	560 mm	
Dizalica	Tip	Loglift Typ 59 F - Hinged telescopic bracket crane
	Doseg	7,2 m
	Podizni moment	78 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	12130 kg
Ostalo	Hydr. adjustable grid, hydr. cooling system; engine block heater, rear view camera; Optional: bogie lift, winch	
Cijena	247500 €	

GREMO 1350 VT

GREMO AB
Box 44
S-31061 Ätran
Švedska
Tel.: 0046(0)346/60515
Fax: 0046(0)346/60342
E-mail: info@gremo.se
Internet: www.gremo.com



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	CUMMINS QSB, vodeno hlađenje, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	141 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase Gre-VT- gear unit. Level 1: 0-11,8 km; Level 2: 0-25 km; Manual differential lock; tractive power: 184 kN	
Osovina	Bogie osovina s mjenjačem	
Upravljanje	Power assisted steering, elec. proportional all terrain steering	
Kočnice	Four multi-disc brakes in oil bath. Park brake: all multi-disc brakes	
Hidraulični sistem	Load detection hyd. System	
Kapacitet pumpe	145 l/min.	
Radni tlak		
Hidraulični spremnik	200 Litara	
Spremnik za gorivo	210 Litara	
Gume	Prednje/ stražnje: 600/55 – 26.5	
Nosivost	13000 kg	
Duljina	9300 mm	
Širina	2665 mm	
Visina	3850 mm	
Radius okretanja	7,5 m	
Odignutost od tla	560 mm	
Dizalica	Tip	Loglift Typ FC 106 - Hinged telescopic bracket crane
	Doseg	7,8 m
	Podizni moment	106 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	16730 kg
Ostalo	Hydr. adjustable grid, hydr. cooling system; engine block heater, rear view camera; Optional: bogie lift, winch	
Cijena	281000 €	

HSM 208 F 11 t

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Broj kotača	8	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	175 kW	
Transmisija	Hydrostatic-mech. drive Rexroth series 71 with electr. controls, NAF 2- transfer box gearing, tractive power: 175 kN	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	190 Litara	
Gume	Prednje/ stražnje: 710/45 – 26.5 T422 SB	
Nosivost	11000 kg	
Duljina	9800 mm	
Širina	2600 mm	
Visina	3590 mm	
Radius okretanja	-	
Odignutost od tla	675 mm	
Dizalica	Tip	Loglift F 72, grapple FX 36
	Doseg	7,2 m
	Podizni moment	99 kNm
	Okretni moment	24,4 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	16000 kg
Ostalo	4 bolster pairs and grid, capacity: 4,0 m ² (option 4,3 m ²); lenght: 4400 mm	
Cijena	274100 €	

HSM 208 F 11 t - Kurchassis

HOHENLOHER Spezial-Maschinenbau GmbH &
Co.KG
Im Greut 10
D-74635 Neu-Kupfer
Njemačka
Tel.: +49(0)7944/9191-0
Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Broj kotača	8	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	175 kW	
Transmisija	Hydrostatic-mech. drive Rexroth series 71 with electr. controls, NAF 2- transfer box gearing, tractive power: 175 kN	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	190 Litara	
Gume	Prednje/ stražnje: 710/45 – 26.5 T422 SB	
Nosivost	11000 kg	
Duljina	9910 mm	
Širina	2600 mm	
Visina	3560 mm	
Radius okretanja	-	
Odignutost od tla	625 mm	
Dizalica	Tip	Epsilon M70 F80, grapple FG 37
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Masa	Prednja osovina	
	Stražnja osovina	
		18000 kg
Ostalo	Hydr. double drum winch Adler HY 20 – 2x10 t variable models for wood extraction. Parallel rotatable comfort cabin ROPS/FOPS tested.	
Cijena	312900 €	

HSM 208 F 12 t

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	175 kW	
Transmisija	Hydrostatic-mech. drive Rexroth series 71 with electr. controls, NAF 2- transfer box gearing, tractive power: 175 kN	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	190 Litara	
Gume	Prednje/ stražnje: 710/45 – 26.5 T422 SB	
Nosivost	12000 kg	
Duljina	10500 mm	
Širina	2600 mm	
Visina	3590 mm	
Radijus okretanja	-	
Odignutost od tla	650 mm	
Dizalica	Tip	Epsilon M70 F80, grapple FG 37
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	16500 kg
Ostalo	Parallel rotatable comfort cabin ROPS/FOPS tested.	
Cijena	312900 €	

HSM 208 F 14 t

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Broj kotača	8	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	175 kW	
Transmisija	Hydrostatic-mech. drive Rexroth series 71 with electr. controls, NAF 2- transfer box gearing, tractive power: 175 kN	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	190 Litara	
Gume	Prednje/ stražnje: 710/45 – 26.5 T422 SB	
Nosivost	14000 kg	
Duljina	10300 mm	
Širina	2860 mm	
Visina	3650 mm	
Radius okretanja	-	
Odignutost od tla	640 mm	
Dizalica	Tip	Epsilon M70 F80, grapple FG 37
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	18500 kg
Ostalo	Parallel rotatable comfort cabin ROPS/FOPS tested.	
Cijena	247650 €	

HSM 208 F 14 t - Steilhang

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	175 kW	
Transmisija	Hydrostatic-mech. drive with electr. CMC- controls, NAF 2- transfer box gearing, tractive power: 195 kN	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	140 Litara	
Spremnik za gorivo	200 Litara	
Gume	Prednje/ stražnje: 710/45 – 26.5 T422 SB	
Nosivost	12000 kg	
Duljina	9960 mm	
Širina	2860 mm	
Visina	3580 mm	
Radius okretanja	-	
Odignutost od tla	675 mm	
Dizalica	Tip	Epsilon S100 F80, grapple FG43 S
	Doseg	8 m
	Podizni moment	128 kNm
	Okretni moment	33 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	19200 kg
Ostalo	synchronised traction winch for slopes upto 70%; cable capacity 450m; tractive power 15t.	
Cijena	348800 €	

HSM 208 F 6 WD

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI		
Broj kotača	6	
Motor	Mercedes Benz 4 cilindra turbo dizel	
Snaga	129 kW	
Transmisija	Hydrostatic-mech. drive with electr. CMC- controls, NAF 2- transfer box gearing, tractive power: 125 kN	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 44°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	152 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	150 Litara	
Gume	Prednje: 23,1 x 26,1 16PR; Stražnje: 710/45 – 26.5 T422 SB	
Nosivost	10000 kg	
Duljina	9380 mm	
Širina	2600 mm	
Visina	3570 mm	
Radius okretanja	-	
Odignutost od tla	640 mm	
Dizalica	Tip	Epsilon S100 F80, grapple FG43 S
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Masa	Prednja osocina	
	Stražnja osovina	
	Net masa	15000 kg
Ostalo	Parallel rotatable comfort cabin ROPS/FOPS tested	
Cijena	243000 €	

HSM 208 F 9 t

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	104 kW	
Transmisija	Hydrostatic-mech. drive with electr. CMC- controls, NAF 2- transfer box gearing, tractive power: 125 kN	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	152 l/min	
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	150 Litara	
Gume	710/40 – 22,5 TRS LS-2 16 PR	
Tlak		
Nosivost	9000 kg	
Duljina	8800 mm	
Širina	2200 mm	
Visina	3560 mm	
Radijus okretanja	-	
Odignutost od tla	637 mm	
Dizalica	Tip	Epsilon M70 F80, grapple FG 37
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Net masa	Prednja osovina	
	Stražnja osovina	
		13800 kg
Ostalo	Parallel rotatable comfort cabin ROPS/FOPS tested	
Cijena	227800 €	

HSM 208 F 9 t - Kurzchassis

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	Mercedes Benz 4 cilindrični turbo dizel	
Snaga	129 kW	
Transmisija	Hydrostatic-mech. drive Rexroth series 71 with electr. controls, NAF 2- transfer box gearing, tractive power: 125 kN.	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	152 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	150 Litara	
Gume	710/40 – 22,5 TRS LS-2 16 PR	
Nosivost	9000 kg	
Duljina	9740 mm	
Širina	2550 mm	
Visina	3590 mm	
Radius okretanja	-	
Odignutost od tla	590 mm	
Dizalica	Tip	Epsilon M70 F80, grapple FG 37
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Net masa	Prednja osovina	
	Stražnja osovina	
	Net masa	15000 kg
Ostalo	Hydr. double drum winch Adler HY 16 – 2x8 t; variable short/long wood Options through flexible bolsters. Parallel rotatable comfort cabin ROPS/FOPS tested	
Cijena	285400 €	

HSM 208 BigFoot

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	175 kW	
Transmisija	Hydrostatic-mech. drive Rexroth series 71 with electr. controls, NAF 2- transfer box gearing, tractive power: 125 kN.	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	140 Litara	
Spremnik za gorivo	150 Litara	
Gume	Prednje / stražnje 54 x 37 – 25; širina guma: 940 mm	
Nosivost	10000 kg	
Duljina	9800 mm	
Širina	3000 mm	
Visina	3590 mm	
Radius okretanja	-	
Odignutost od tla	650 mm	
Dizalica	Tip	Epsilon M70 F80, grapple FG 37
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Masa	Prednja osovina	
	Stražnja osovina	
		16000 kg
Ostalo	Parallel rotatable comfort cabin ROPS/FOPS tested. Special Equipment for wet undergrounds	
Cijena	280500 €	

HSM 904 F

HOHENLOHER Spezial-Maschinenbau GmbH & Co.KG
 Im Greut 10
 D-74635 Neu-Kupfer
 Njemačka
 Tel.: +49(0)7944/9191-0
 Internet: www.hsm-forstmaschinen.de



TEHNIČKI DETALJI

Broj kotača	6	
Motor	IVECO, 6 cilindrični dizel motor s direktnim ubrizgavanjem	
Snaga	175 kW	
Transmisija	Hydrostatic-mech. drive Rexroth series 71 with electr. controls, NAF 2- transfer box gearing, tractive power: 125 kN.	
Osovina	NAF tandem axle, shiftable differential lock 100%	
Upravljanje	Hydr. articulated steering with hydr. distortion stop, steering angle 45°	
Kočnice	Service brake: 4 Multi disc brakes in oil bath, hydr. power-operated, 2 braking circuits Fixing brake: spring-loaded brake	
Hidraulični sistem	Multi-circuit hydr. System for drive, and Brakes. Load sensing system	
Kapacitet pumpe	200 l/min	
Radni tlak		
Hidraulični spremnik	145 Litara	
Spremnik za gorivo	145 Litara	
Gume	Prednje 23,1 – 26 16 pr; stražnje: 710/45 – 26.5 T422 SB	
Nosivost	11000 kg	
Duljina	8790 mm	
Širina	2600 mm	
Visina	3590 mm	
Radius okretanja	-	
Odignutost od tla	595 mm	
Dizalica	Tip	Epsilon M70 F80, grapple FG 37
	Doseg	8 m
	Podizni moment	102 kNm
	Okretni moment	26 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net osovina	16200 kg
Ostalo	Hydr. double drum winch Adler 20 – 2x10t; variable short/long wood Options through flexible bolsters. Parallel rotatable comfort cabin ROPS/FOPS tested	
Cijena	298800 €	

JOHN DEERE 1010E 6w

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI		
Broj kotača	6	
Motor	JOHN DEERE Typ 4045 PowerTech Plus, water-cooled 4-Zylinder-Turbodiesel with charge-air cooler	
Snaga	115 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, hydro.-mech. differential lock; disengageable rear wheel drive; tractive power: 140 kN..	
Osovina	Front: live axle; Rear: bogie axles	
Upravljanje	Hydros. articulated frame steering	
Kočnice	Service brake: hydr. multi-disc brake in oil bath Fixing brake: spring-loaded brake (emergency brake)	
Hidraulični sistem	Load detection hyd. System	
Kapacitet pumpe	180 l/min	
Radni tlak		
Hidraulični spremnik	100 Litara	
Spremnik za gorivo	165 Litara	
Gume	Prednje 600/65 - 34 ; stražnje: 600/55 – 26.5	
Nosivost	11000 kg	
Duljina	9390 mm	
Širina	2820 mm	
Visina	3600 mm	
Radijus okretanja	-	
Odignutost od tla	605 mm	
Dizalica	Tip	John Deere Typ CF5 – Hinged bracket crane
	Doseg	7,2 – 10 m
	Podizni moment	102 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	12800 kg
Ostalo		
Cijena	265000 €	

JOHN DEERE 1110E 8w

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	JOHN DEERE Typ 6068 PowerTech Plus, water-cooled 6-cylinder-Turbodiesel with charge-air cooler	
Snaga	136 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, hydro.-mech. differential lock; disengageable rear wheel drive; tractive power: 150 kN..	
Osovina	Bogie osovina s mjenjačem	
Upravljanje	Hydros. articulated frame steering	
Kočnice	Service brake: hydr. multi-disc brake in oil bath Fixing brake: spring-loaded brake (emergency brake)	
Hidraulični sistem	Load detection hyd. System	
Kapacitet pumpe	140 l/min	
Radni tlak		
Hidraulični spremnik	100 Litara	
Spremnik za gorivo	167 Litara	
Gume	Prednje 700/26,5 - 20 ; stražnje: 700 – 26.5 -20	
Nosivost	12000 kg	
Duljina	9570 mm	
Širina	2700 mm	
Visina		
Radius okretanja	-	
Odignutost od tla	605 mm	
Dizalica	Tip	Hinged bracket crane
	Doseg	7,2 – 10 m
	Podizni moment	102 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	17300 kg
Ostalo		
Cijena		

JOHN DEERE 1110E IT4

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	John Deere 6068 PowerTech Plus with turbocharger and intercooler, 6 cylinders, displacement 6.8 l	
Snaga	136 kW	
Transmisija	Hydrostatic-mechanical two-speed gearbox, traction: 160 kN	
Osovina	Bogie axles front and rear; hydromechanical; Differential lock front and rear; 6-wheel	
Upravljanje	Proportional steering with electric mini levers $\pm 44^\circ$	
Kočnice	When the service brake is hydraulically operated oil-immersed brakes; Parking and emergency brakes are actuated by springs; The frame brake is automatically actuated.	
Hidraulični sistem	Load sensing, variable power	
Kapacitet pumpe	140 l/min	
Radni tlak		
Hidraulični spremnik	161 Litara	
Spremnik za gorivo	-	
Gume	-	
Nosivost	12000 kg	
Duljina	9570 mm	
Širina	2890 mm	
Visina	3800 mm	
Radius okretanja	-	
Odignutost od tla	605 mm	
Dizalica	Tip	John Deere CF5 - Crane with telescope
	Doseg	7,2 – 10 m
	Podizni moment	102 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	15200 kg
Ostalo	-	
Cijena	295000 €	

JOHN DEERE 120E IT4

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI

Broj kotača	8	
Motor	John Deere 6068 PowerTech Plus with turbocharger and intercooler, 6 cylinders, displacement 6.8 l	
Snaga	145 kW	
Transmisija	Hydrostatic-mechanical two-speed gearbox, traction: 175 kN	
Osovina	Balanced heavy-duty Duraxle™- Bogie axles front and rear; hydromechanical; Differential lock front and rear; 6-wheel	
Upravljanje	Proportional steering with electric mini levers $\pm 44^\circ$	
Kočnice	When the service brake is hydraulically operated oil-immersed brakes; Parking and emergency brakes are actuated by springs; The frame brake is automatically actuated.	
Hidraulični sistem	Load sensing, variable power	
Kapacitet pumpe	160 l/min	
Radni tlak		
Hidraulični spremnik	161 Litara	
Spremnik za gorivo	-	
Gume	-	
Nosivost	-	
Duljina	9270 mm	
Širina	29560 mm	
Visina	3800 mm	
Radius okretanja	-	
Odignutost od tla	-	
Dizalica	Tip	John Deere CF7 - Crane with telescope
	Doseg	7,2 – 10 m
	Podizni moment	125 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	17780 kg
Ostalo	-	
Cijena	315000 €	

JOHN DEERE 810E

JOHN DEERE Forestry OY
Box 474
Fin-33101 Tampere
Finska
Internet: www.deere.com



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	JOHN DEERE Type 4045 , water-cooled 4-cylinder turbo diesel with intercooler	
Snaga	100 kW	
Transmisija	Hydrostatic-mechanical power transmission; constant all-wheel drive with 2-speed levels. Hydromechanical differential lock at front and rear. Detachable rear drive. Tensile force: 110 kN	
Osovina	Front and rear balanced gear bogie	
Upravljanje	Hydros. articulated frame steering	
Kočnice	hydraulically actuated multi-disc brakes in an oil bath. Spring actuated parking and emergency brake.	
Hidraulični sistem	Load-sensing hydraulic system with power control	
Kapacitet pumpe	90 l/min	
Radni tlak		
Hidraulični spremnik	-	
Spremnik za gorivo	110 Litara	
Gume	Prednje/stražnje; 700 – 22,5 – 16	
Nosivost	9000 KG	
Duljina	8240 mm	
Širina	2680 mm	
Visina	3780 mm	
Radijus okretanja	-	
Odignutost od tla	615 mm	
Dizalica	Tip	John Deere Type CF1
	Doseg	7,2 – 9,8 m
	Podizni moment	76 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	12950 kg
Ostalo	-	
Cijena	235000 €	

Komatsu 830.3

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI

Broj kotača	8	
Motor	44 CWA, 4-cyl. Turbo mit Commonrail	
Snaga	107 kW	
Transmisija	Hydrostatic-mech. drive; shiftable all wheel drive; differential lock in front and rear	
Osovina	Bogie osovina	
Upravljanje	Hydrst. articulated frame steering controllable via crane-control or via steering wheel	
Kočnice	Dual-circuit hydr. Multi-disc Brakes. Hydr. accumulator valve charging	
Hidraulični sistem	Load-dependent one-circuit system with piston pump	
Kapacitet pumpe	170 l/min	
Radni tlak		
Hidraulični spremnik	80 Litara	
Spremnik za gorivo	100 Litara	
Gume	600/50 - 22.5; 650/45x22,5; 700/45x22,5;710/40x22,5	
Nosivost	9000 kg	
Duljina	8122 mm	
Širina	2600 mm	
Visina	3526 mm	
Radius okretanja	6,7 m	
Odignutost od tla	622 mm	
Dizalica	Tip	Cranab CRF 5, hinged telescopic bracket crane
	Domet	6,8 m
	Podizni moment	74 kNm
	Okretni moment	-
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	10500 kg
Ostalo	-	
Cijena	190000 €	

Komatsu 835

KOMATSU FOREST AB
Box 7124
S-90704 Umea
Švedska
Internet: www.komatsuforest.com



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	AGCO POWER 49 AWF-4V, 4 cilindrični turbo dizel motor s direktnim ubrizgavanjem	
Snaga	127 kW	
Transmisija	Computer-assisted hydrostatic-mechanical power transmission	
Osovina	Portalbogie with increased ground clearance and hub reduction. Differential with hydraulic mechanical differential lock	
Upravljanje	-	
Kočnice	Dual circuit, fully hydraulic multi-disc brakes. Hydraulic accumulator charging valve Footbrake: multi-disc brakes in an oil bath. Parking brake: spring brake with electro-hydraulic Control	
Hidraulični sistem	Load-dependent one-circuit system with piston pump	
Kapacitet pumpe	250 l/min	
Radni tlak		
Hidraulični spremnik	127 Litara	
Spremnik za gorivo	120 Litara	
Gume	Prednji: 710/55x34 600/65x34; stražnji: 710/40x24,5 650/45x24,5	
Nosivost	12000 kg	
Duljina	9017 mm	
Širina	2894 mm	
Visina	3909 mm	
Radius okretanja	-	
Odignutost od tla	-	
Dizalica	Tip	CRF 8.1
	Doseg	7,8 m
	Podizni moment	106,1 kNm
	Okretni moment	28,7 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	13800 kg
Ostalo	-	
Cijena	-	

Komatsu 840TX 6-Rad

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI

Broj kotača	6	
Motor	49 CWA-4V, 4-cylinder, Turbo mit Common-Rail. EPA Tier 3 und EU Stufe IIIA	
Snaga	129 kW	
Transmisija	Hydrostatic-mech. drive; shiftable all wheel drive; differential lock in front and rear	
Osovina	Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Dual-circuit hydr. Multi-disc Brakes. Hydr. accumulator valve charging	
Hidraulični sistem	Load-dependent one-circuit system with piston pump	
Kapacitet pumpe	290 l/min	
Radni tlak		
Hidraulični spremnik	100 Litara	
Spremnik za gorivo	160 Litara	
Gume	600 / 55x24,5 or 650 / 45x24,5 ili 710 / 45x24,5	
Nosivost	11000 kg	
Duljina	9230 mm	
Širina	2640 mm	
Visina	3797 mm	
Radijus okretanja	-	
Odignutost od tla	-	
Dizalica	Tip	
	Doseg	
	Podizni moment	
	Okretni moment	
Masa	Prednja odovina	
	Stražnja osovina	
	Net masa	15850 kg
Ostalo	-	
Cijena	285000 €	

Komatsu 845

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI

Broj kotača	8	
Motor	AGCO POWER 49 AWF 4V, 4-cylinder turbo diesel engine with intercooler	
Snaga	140 kW	
Transmisija	-	
Osovina	Portalbogie with increased ground clearance and the hub transmission. Differential with mechanical hydraulically differential lock	
Upravljanje	-	
Kočnice	Dual-circuit hydr. Multi-disc Brakes. Hydr. accumulator valve charging	
Hidraulični sistem	Load-dependent one-circuit system with piston pump	
Kapacitet pumpe	280 l/min	
Radni tlak		
Hidraulični spremnik	127 Litara	
Spremnik za gorivo	124 Litara	
Gume	600 / 55x26,5 or 710 / 45x26,5	
Nosivost	12000 kg	
Duljina	9231 mm	
Širina	2850 mm	
Visina	3795 mm	
Radius okretanja	-	
Odignutost od tla	-	
Dizalica	Tip	Komatsu 105F
	Doseg	7,8/ 9,5/ 10 m
	Podizni moment	
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
		16600 kg
Ostalo	-	
Cijena	390000 €	

Komatsu 855 6/8 - Rad

KOMATSU FOREST AB
Box 7124
S-90704 Umea
Švedska
Internet: www.komatsuforest.com



TEHNIČKI DETALJI

Broj kotača	6/8	
Motor	66 AWI	
Snaga	150 kW	
Transmisija	Hydrostatic-mech. power Transmission; shiftable all wheel drive; differential lock in front and rear	
Osovina	Bogie osovina	
Upravljanje	Hydrst. articulated frame steering controllable via crane-control or via steering wheel	
Kočnice	Dual-circuit hydr. Multi-disc Brakes. Hydr. accumulator valve charging	
Hidraulični sistem	Load-dependent one-circuit system with piston pump	
Kapacitet pumpe	290 l/min	
Radni tlak		
Hidraulični spremnik	122 Litara	
Spremnik za gorivo	165 Litara	
Gume	600/55x26; 710/45x26,5	
Nosivost	13000 kg	
Duljina	9829 mm	
Širina	2690 mm	
Visina	3844 mm	
Radijus okretanja	-	
Odignutost od tla	-	
Dizalica	Tip	Crane: CRF 8,1
	Doseg	7,8 m
	Podizni moment	106,1 kNm
	Okretni moment	28,7 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	
Ostalo	-	
Cijena		

Komatsu 865 6/8 - Rad

KOMATSU FOREST AB

Box 7124

S-90704 Umea

Švedska

Internet: www.komatsuforest.com



TEHNIČKI DETALJI

Broj kotača	6/8	
Motor	74 AWI-4V, 6-cylinder-Dieselmotor - Turbo and charge air coolin	
Snaga	158 kW	
Transmisija	Hydrostatic-mech. power transmission; shiftable all wheel drive; differential lock in front and rear	
Osovina	Bogie osovina	
Upravljanje	Hydr. articulated frame steering with double acting cylinders	
Kočnice	Dual-circuit hydr. Multi-disc Brakes. Hydr. accumulator valve charging	
Hidraulični sistem	Load-dependent one-circuit system with piston pump	
Kapacitet pumpe	290 l/min	
Radni tlak		
Hidraulični spremnik	122 Litara	
Spremnik za gorivo	165 Litara	
Gume	600/55x26; 710/45x26,5	
Nosivost	15000 kg	
Duljina	9829 mm	
Širina	-	
Visina	3844 mm	
Radijus okretanja	-	
Odignutost od tla	-	
Dizalica	Tip	Crane: CRF 11
	Doseg	7,8 m
	Podizni moment	126 kNm
	Okretni moment	28,7 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	15860 kg
Ostalo	-	
Cijena		

Komatsu 895

KOMATSU FOREST AB
Box 7124
S-90704 Umea
Švedska
Inte
rnet: www.komatsuforest.com



TEHNIČKI DETALJI

Broj kotača	8	
Motor	74 AWI-4V, 6-cylinder-Dieselmotor - Turbo and charge air coolin	
Snaga	193 kW	
Transmisija	Hydrostatic-mech. 2 Speed drive; shiftable all wheel drive; differential lock in front and rear	
Osovina	Bogie osovina	
Upravljanje	Hydr. articulated frame steering with double acting cylinders	
Kočnice	Dual-circuit hydr. Multi-disc Brakes. Hydr. accumulator valve charging	
Hidraulični sistem	Load-dependent one-circuit system with piston pump	
Kapacitet pumpe	360 l/min	
Radni tlak		
Hidraulični spremnik	167 Litara	
Spremnik za gorivo	210 Litara	
Gume	780/50x28,5	
Nosivost	20000 kg	
Duljina	10565 mm	
Širina	3160 mm	
Visina	3965 mm	
Radijus okretanja	-	
Odignutost od tla	-	
Dizalica	Tip	Komatsu 165F
	Doseg	7,5/8,5 m
	Podizni moment	165,2 kNm
	Okretni moment	43,4 kNm
	Prednja osovina	
Net masa	Stražnja osovina	
	Nez masa	23800 kg
Ostalo	-	
Cijena		

LOGSET 10F GT

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.fi



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	SISU 74 AWI, water-cooled 6-cylinder-Diesel engine	
Snaga	205 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, manual differential lock-disengageable; tractive power: 135 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Hydr. dual-circuit (emergency) brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	180 l/min	
Radni tlak		
Hidraulični spremnik	175 Litara	
Spremnik za gorivo	240 Litara	
Gume	750/55 - 26.5	
Nosivost	18000 kg	
Duljina	11800 mm	
Širina	3070 mm	
Visina	4100 mm	
Radius okretanja	-	
Odignutost od tla	730 mm	
Dizalica	Tip	Loglift 111
	Doseg	7,2 m – 0,2
	Podizni moment	151 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	22000 kg
Ostalo	-	
Cijena		

LOGSET 10F GT

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.fi



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	SISU 74 AWI, water-cooled 6-cylinder-Diesel engine	
Snaga	205 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, manual differential lock-disengageable; tractive power: 135 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Hydr. dual-circuit (emergency) brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	180 l/min	
Radni tlak		
Hidraulični spremnik	175 Litara	
Spremnik za gorivo	240 Litara	
Gume	750/55 - 26.5	
Nosivost	18000 kg	
Duljina	11800 mm	
Širina	3070 mm	
Visina	4100 mm	
Radijus okretanja	-	
Odignutost od tla	730 mm	
Dizalica	Tip	Loglift 111
	Doseg	7,2 m – 9,2
	Podizni moment	151 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	22000 kg
Ostalo	-	
Cijena		

LOGSET 4F

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.fi



TEHNIČKI DETALJI

Broj kotača	8	
Motor	SISU 44 CWA, water-cooled 6-cylinder-Diesel engine	
Snaga	108 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, manual differential lock-disengageable; tractive power: 135 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Hydr. dual-circuit (emergency) brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	130 l/min	
Radni tlak		
Hidraulični spremnik	175 Litara	
Spremnik za gorivo	205 Litara	
Gume	700/45 - 22.5,	
Nosivost	10000 kg	
Duljina	9121 mm	
Širina	3685 mm	
Visina	3985 mm	
Radijus okretanja	14 M	
Odignutost od tla	600 mm	
Dizalica	Tip	Loglift 61
	Doseg	7,2 m – 9,2 m
	Podizni moment	91 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	12000 kg
Ostalo	winch, revolvable bolster	
Cijena		

LOGSET 5F

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.fi



TEHNIČKI DETALJI

Broj kotača	8	
Motor	SISU 49 CWA, water-cooled 4-cylinder-Diesel engine	
Snaga	125 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, manual differential lock-disengageable; tractive power: 135 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Hydr. dual-circuit (emergency) brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	140 l/min	
Radni tlak		
Hidraulični spremnik	175 Litara	
Spremnik za gorivo	205 Litara	
Gume	700/50 – 26,	
Nosivost	11000 kg	
Duljina	9121 mm	
Širina	2620 mm	
Visina	3985 mm	
Radijus okretanja	14 m	
Odignutost od tla	650 mm	
Dizalica	Tip	Loglift 71
	Doseg	7,2 m – 9,2 m
	Podizni moment	99 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	14500 kg
Ostalo	winch, revolvable bolster	
Cijena		

LOGSET 6F GT

OY LOGSET AB
Hännisentie 2
FIN-66530 Koivulahti
Finska
Internet: www.logset.fi



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	SISU 74 CWA, water-cooled 6-cylinder-Diesel engine	
Snaga	150 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, manual differential lock-disengageable; tractive power: 135 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Hydr. dual-circuit (emergency) brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	147 l/min	
Radni tlak		
Hidraulični spremnik	175 Litara	
Spremnik za gorivo	205 Litara	
Gume	700/50 – 26,5	
Nosivost	13000 kg	
Duljina	9658 mm	
Širina	2780 mm	
Visina	3818 mm	
Radijus okretanja	15 m	
Odignutost od tla	660 mm	
Dizalica	Tip	Loglift 91
	Doseg	7,2 m – 9,2 m
	Podizni moment	125 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	16000 kg
Ostalo	winch, revolvable bolster	
Cijena		

PONSSE BUFFALO+

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI

Broj kotača	6	
Motor	MERCEDES-BENZ OM 906 LA, water-cooled 6-cylinder-Turbodiesel with fuel-injection unit and charge-air cooler	
Snaga	210 kW	
Transmisija	Hydros.-mech. power transmission with 2 Phase drive, manual differential lock-disengageable; tractive power: 180 kN	
Osovina	Bogie axles with planetary gear unit	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Service brake: hydr. multi-disc brake Fixing brake: spring-loaded brake	
Hidraulični sistem	-	
Kapacitet pumpe	-	
Radni tlak		
Hidraulični spremnik	200 Litara	
Spremnik za gorivo	200 Litara	
Gume	700/45 - 26.5	
Nosivost	14000 kg	
Duljina	9405 mm	
Širina	2670 mm	
Visina	3750 mm	
Radijus okretanja	-	
Odignutost od tla	695 mm	
Dizalica	Tip	Ponsse K 90/K 100 – Hinged bracket crane
	Doseg	7,9 m – 10 m
	Podizni moment	149 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	18500 kg
Ostalo	load floor extension, tilttable crane, winch, logging pan, revolving bolster, Balanced Bogies	
Cijena	255000 €	

PONSSE Buffalo Dual

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI

Broj kotača	8	
Motor	MERCEDES-BENZ OM 906 LA, water-cooled 6-cylinder-Turbodiesel	
Snaga	210 kW	
Transmisija	-	
Osovina	-	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Service brake: hydr. multi-disc brake Fixing brake: spring-loaded brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	-	
Radni tlak		
Hidraulični spremnik	170 Litara	
Spremnik za gorivo	200 Litara	
Gume	710/45-34	
Nosivost	14000 kg	
Duljina	8920 mm	
Širina	3085 mm	
Visina	3860 mm	
Radijus okretanja	-	
Odignutost od tla	680 mm	
Dizalica	Tip	Ponsse K90Dual+ Hinged bracket crane
	Doseg	9 m
	Podizni moment	160 kNm
	Okretni moment	33 kNm
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	20650 kg
Ostalo	load floor extention, tilttable crane, winch, logging pan, revolving bolster, Balanced Bogies	
Cijena	290000 €	

PONSSE ELK

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI		
Broj kotača	6	
Motor	MERCEDES-BENZ OM 906 LA, water-cooled 4-cylinder-Turbodiesel with fuel-injection unit and charge-air cooler	
Snaga	130 kW	
Transmisija	Hydros.-mech. 2 Phase drive, Manual disengageable differential lock; tractive power: 170 kN	
Osovina	Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Service brake: hydr. multi-disc brake Fixing brake: spring-loaded brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	130 Litara	
Gume	710/45-26.5	
Nosivost	13000 kg	
Duljina	9150 mm	
Širina	2670 mm	
Visina	3780 mm	
Radius okretanja	15 m	
Odignutost od tla	670 mm	
Dizalica	Tip	Ponsse K90Dual Hinged bracket crane
	Doseg	7,9 - 10 m
	Podizni moment	140 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	17500 kg
Ostalo	load floor extention, tilttable crane, winch, logging pan, revolving bolster, Balanced Bogies	
Cijena	240000 €	

PONSSE GAZELLE

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI

Broj kotača	8	
Motor	MERCEDES-BENZ OM 904 LA, water-cooled 4-cylinder-Turbodiesel with fuel-injection unit	
Snaga	129 kW	
Transmisija	Hydros.-mech. 2 Phase drive, Manual disengageable differential lock;	
Osovina	Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Service brake: hydr. multi-disc brake Fixing brake: spring-loaded brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	130 Litara	
Gume	710/45–22.5	
Nosivost	10000 kg	
Duljina	8830 mm	
Širina	2450 mm	
Visina	3710 mm	
Radius okretanja	7,5 m	
Odignutost od tla	600 mm	
Dizalica	Tip	Ponsse K 70+ Hinged bracket crane
	Doseg	7,9 - 10 m
	Podizni moment	106 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	13800 kg
Ostalo	load floor extention, tilttable crane, winch, logging pan, revolving bolster, Balanced Bogies	
Cijena	-	

PONSSE WISENT

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	MERCEDES-BENZ OM 904 LA, water-cooled 4-cylinder-Turbodiesel with fuel-injection unit	
Snaga	130 kW	
Transmisija	Hydros.-mech. 2 Phase drive, Manual disengageable differential lock; tractive power 160 kN	
Osovina	Bogie osovina	
Upravljanje	Hydr. articulated frame steering	
Kočnice	Service brake: hydr. multi-disc brake Fixing brake: spring-loaded brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	232 l/min	
Radni tlak		
Hidraulični spremnik	130 Litara	
Spremnik za gorivo	130 Litara	
Gume	710/45–26.5	
Nosivost	12000 kg	
Duljina	8830 mm	
Širina	2610 mm	
Visina	3750 mm	
Radius okretanja	15 m	
Odignutost od tla	625 mm	
Dizalica	Tip	Ponsse K 70+ Hinged bracket crane
	Doseg	7,9 - 10 m
	Podizni moment	106 kNm
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	16000 kg
Ostalo	load floor extention, tilttable crane, winch, logging pan, revolving bolster, Balanced Bogies	
Cijena	366000€	

PONSSE 81-10

PONSSE OYJ
Ponssentie 22
FIN-74200 Vieremä
Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	DEUTZ, oil-watercooled 4-cylinder-Common Rail-Dieselmotor	
Snaga	113 kW	
Transmisija	Hydr.electr. drive, 2 Speed drive. differential lock 100%. tractive power 131 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated steering with 2 cylinders; controlable via crane control with separated joystick	
Kočnice	Service brake: hydr. multi-disc brake Fixing brake: spring-loaded brake	
Hidraulični sistem	Multiple circuit hydr. System for tools and drive	
Kapacitet pumpe	210 l/min	
Radni tlak		
Hidraulični spremnik	-	
Spremnik za gorivo	140 Litara	
Gume	600/50 –22.5 16 pr	
Nosivost	11000 kg	
Duljina	8700 mm	
Širina	2750 mm	
Visina	3650 mm	
Radijus okretanja	-	
Odignutost od tla	600 mm	
Dizalica	Tip	Typ Cranab FC 80
	Doseg	7,2 m
	Podizni moment	
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	11800 kg
Ostalo		
Cijena		

PONSSE 81-12

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	DEUTZ, oil-watercooled 6-cylinder-Common Rail-Dieselmotor	
Snaga	152 kW	
Transmisija	Hydr.electr. drive, 2 Speed drive. differential lock 100%. tractive power 178 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated steering with 2 cylinders; controlable via crane control with separated joystick	
Kočnice	Internal Multi. disc Brakes in oil bath	
Hidraulični sistem	Multiple circuit hydr.	
Kapacitet pumpe	210 l/min	
Radni tlak		
Hidraulični spremnik	-	
Spremnik za gorivo	180 Litara	
Gume	600/60 –26.5 16 pr	
Nosivost	12000 kg	
Duljina	10535 mm	
Širina	2700 mm	
Visina	3800 mm	
Radius okretanja	-	
Odignutost od tla	600 mm	
Dizalica	Tip	Typ Cranab FC 115
	Doseg	7,2 m
	Podizni moment	
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	16400 kg
Ostalo		
Cijena		

PONSSE 81-16

PONSSE OYJ
 Ponssentie 22
 FIN-74200 Vieremä
 Finska
<http://www.ponsse.com/>



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	DEUTZ, oil-watercooled 6-cylinder-Common Rail-Dieselmotor	
Snaga	181 kW	
Transmisija	Hydr.electr. drive, 2 Speed drive. differential lock 100%. tractive power 233 kN	
Osovina	NAF - Bogie osovina	
Upravljanje	Hydr. articulated steering with 2 cylinders; controlable via crane control with separated joystick	
Kočnice	Internal Multi. disc Brakes in oil bath	
Hidraulični sistem	Multiple circuit hydr.	
Kapacitet pumpe	240 l/min	
Radni tlak		
Hidraulični spremnik	-	
Spremnik za gorivo	340 Litara	
Gume	700/50 -26.5 16 pr	
Nosivost	16000 kg	
Duljina	10600 mm	
Širina	2900 mm	
Visina	3850 mm	
Radius okretanja	-	
Odignutost od tla	610 mm	
Dizalica	Tip	Typ Cranab FC 115
	Doseg	8,5 m
	Podizni moment	
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	19800 kg
Ostalo		
Cijena		

ROTTNE F13 C

ROTTNE INDUSTRIE AB
 Fabrigsvägen 12
 SE-36040 Rottne
 Schweden
<http://www.rottne.com/>



TEHNIČKI DETALJI

Broj kotača	8	
Motor	JOHN DEERE 6068 HF Tier 3, watercooled 6-cylinder-Turbodiesel	
Snaga	164 kW	
Transmisija	Hydrst.-mechan. 2-gear drive and manual shiftable differential lock 100%; tractive power 168 kN	
Osovina	Bogie osovina	
Upravljanje	Hydrost. articulated frame steering, steering wheel and push-button control	
Kočnice	Service brake: hydrost. multi disc Brakes. Fixing brake: spring-loaded brake	
Hidraulični sistem	Separated hydr. System for hydrostat and crane	
Kapacitet pumpe	210 l/min	
Radni tlak		
Hidraulični spremnik	105 Litara	
Spremnik za gorivo	165 Litara	
Gume	710/45 –26.5	
Nosivost	13000 kg	
Duljina	9833 mm	
Širina	2924 mm	
Visina	3864 mm	
Radijus okretanja	14,6 m	
Odignutost od tla	668 mm	
Dizalica	Tip	Rottne RK 125
	Doseg	7,2 m – 10 m
	Podizni moment	125 kN
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	19700 kg
Ostalo		
Cijena	265402 €	

ROTTNE F13 C

ROTTNE INDUSTRIE AB
 Fabrigsvägen 12
 SE-36040 Rottne
 Schweden
<http://www.rottnet.com/>



TEHNIČKI DETALJI

Broj kotača	8	
Motor	JOHN DEERE 6068 HF Tier 3, watercooled 6-cylinder-Turbodiesel	
Snaga	164 kW	
Transmisija	Hydrst.-mechan. 2-gear drive and manual shiftable differential lock 100%; tractive power 168 kN	
Osovina	Bogie osovina	
Upravljanje	Hydrost. articulated frame steering, steering wheel and push-button control	
Kočnice	Service brake: hydrost. multi disc Brakes. Fixing brake: spring-loaded brake	
Hidraulični sistem	Separated hydr. System for hydrostat and crane	
Kapacitet pumpe	210 l/min	
Radni tlak		
Hidraulični spremnik	105 Litara	
Spremnik za gorivo	165 Litara	
Gume	710/45 –26.5	
Nosivost	13000 kg	
Duljina	9833 mm	
Širina	2924 mm	
Visina	3864 mm	
Radijus okretanja	14,6 m	
Odignutost od tla	668 mm	
Dizalica	Tip	Rottne RK 125
	Doseg	7,2 m – 10 m
	Podizni moment	125 kN
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	19700 kg
Ostalo		
Cijena	265402 €	

ROTTNE F15 C

ROTTNE INDUSTRIE AB
 Fabrigsvägen 12
 SE-36040 Rottne
 Schweden
<http://www.rottnet.com/>



TEHNIČKI DETALJI		
Broj kotača	6	
Motor	JOHN DEERE 6068 HF Tier 3, watercooled 6-cylinder-Turbodiesel	
Snaga	165 kW	
Transmisija	Hydrst.-mechan. drive; tractive power 177 kN	
Osovina	Bogie osovina	
Upravljanje	Hydrost. articulated frame steering, steering wheel and push-button control	
Kočnice	Service brake: hydrost. multi disc Brakes. Fixing brake: spring-loaded brake	
Hidraulični sistem	From Transmission separated hydr. System	
Kapacitet pumpe	210 l/min	
Radni tlak		
Hidraulični spremnik	105 Litara	
Spremnik za gorivo	165 Litara	
Gume	710/45 –26.5	
Nosivost	14000 kg	
Duljina	9833 mm	
Širina	2924 mm	
Visina	3864 mm	
Radius okretanja	14,6 m	
Odignutost od tla	668 mm	
Dizalica	Tip	Rottne RK 125
	Doseg	7,2 m – 10 m
	Podizni moment	125 kN
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	18700 kg
Ostalo		
Cijena	2567407 €	

ROTTNE Solid F10 B

ROTTNE INDUSTRIE AB
 Fabrigsvägen 12
 SE-36040 Rottne
 Schweden
<http://www.rottne.com/>



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	JOHN DEERE Typ 4045 HF, Tier 3, water cooled 4-cylinder-Turbodiesel	
Snaga	116 kW	
Transmisija	Hydros.-mech. drive 2 Speed. Manual differential lock; tractive power: 139 kN	
Osovina	Bogie osovina	
Upravljanje	Hydrost. articulated frame steering, steering wheel and push-button control	
Kočnice	Service brake: hydrost. multi disc Brakes. Fixing brake: spring-loaded brake	
Hidraulični sistem	Separated hydraulic System for hydrostat and crane	
Kapacitet pumpe	165 l/min	
Radni tlak		
Hidraulični spremnik	90 Litara	
Spremnik za gorivo	125 Litara	
Gume	600/50 –22.5	
Nosivost	9000 kg	
Duljina	8513 mm	
Širina	2530 mm	
Visina	3687 mm	
Radius okretanja	14,6 m	
Odignutost od tla	600 mm	
Dizalica	Tip	Rottne RK 85
	Domet	7,5 m – 9,3 m
	Podizni moment	60/78 kN
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	12000 kg
Ostalo		
Cijena	205342 €	

ROTTNE Solid F18

ROTTNE INDUSTRIE AB
 Fabrigsvägen 12
 SE-36040 Rottne
 Schweden
<http://www.rottnet.com/>



TEHNIČKI DETALJI

Broj kotača	8	
Motor	JOHN DEERE 9090 HF Tier 3, watercooled 6-cylinder-Turbodiesel	
Snaga	187 kW	
Transmisija	Hydrst.-mechan. 2-gear drive and manual shiftable differential lock 100%; tractive power 220 kN	
Osovina	Bogie osovina	
Upravljanje	Hydrost. articulated frame steering, steering wheel and push-button control	
Kočnice	Service brake: hydrost. multi disc Brakes. Fixing brake: spring-loaded brake	
Hidraulični sistem	Separated hydraulic System for hydrostat and crane	
Kapacitet pumpe	270 l/min	
Radni tlak		
Hidraulični spremnik	200 Litara	
Spremnik za gorivo	240 Litara	
Gume	750/45 –30.5	
Nosivost	18000 kg	
Duljina	10890 mm	
Širina	3050 mm	
Visina	3700 mm	
Radius okretanja	18,6 m	
Odignutost od tla	700 mm	
Dizalica	Tip	Rottne RK 160
	Doseg	8,5 m – 10 m
	Podizni moment	156 kN
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	23000 kg
Ostalo		
Cijena	296261 €	

SILVATEC Sleipner Forwarder 814TF

SILVATEC A/S
 Fabriksvej 50
 DK-9640 Farso
 Danska
 Tel.: 0045/9863/2411
 E-mail: silvatec@silvatec.com
 Internet: www.silvatec.com



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	Mercedes OM906LA	
Snaga	205 kW	
Transmisija	Hydr.-mechan. 2-gears	
Osovina	NAF – Osovina	
Upravljanje	Articulated steering	
Kočnice	Dual-circuit, Multi disc Brakes in oil bath. Fixing brake: hydr. spring-loaded brake	
Hidraulični sistem	Load-Sensing hydraulic	
Kapacitet pumpe	250 l/min	
Radni tlak		
Hidraulični spremnik	200 Litara	
Spremnik za gorivo	260 Litara	
Gume	600 x 26.5	
Nosivost	14000 kg	
Duljina	9785 mm	
Širina	2690 mm	
Visina	3750 mm	
Radijus okretanja	-	
Odignutost od tla	650 mm	
Dizalica	Tip	Cranb: FC125
	Doseg	10 m
	Podizni moment	90 kN
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	18000 kg
Ostalo	engine and cabin heating; fire-extinguishing system	
Cijena		

STEFAN-BAVARIA

SMB-Sondermaschinenbau Sonneberg e. K.
Friedrich-Engels-Straße 115
D-96515 Sonneberg
Njemačka
Tel.: 0049(0)3675/702566
Fax: 0049(0)3675/743208



TEHNIČKI DETALJI		
Broj kotača	8	
Motor	JOHN DEERE Typ 6068T, watercooled 6-cylinder-Diesel engine	
Snaga	127 kW	
Transmisija	Hydrst.-mechan. 3-gear drive and electr.-hydr. differential lock 100%	
Osovina	STEFAN-bogie axle with gear wheel	
Upravljanje	Hydr. articulated frame steering	
Kočnice	service brake: 4 x negative brake. 8 x positive brake	
Hidraulični sistem	Multi-hydraulic system for drive and crane	
Kapacitet pumpe	130 l/min	
Radni tlak		
Hidraulični spremnik	250 Litara	
Spremnik za gorivo	200 Litara	
Gume	600 x 26.5	
Nosivost	12000 kg	
Duljina	9200 mm	
Širina	2500 mm	
Visina	3450 mm	
Radijus okretanja	12,4 m	
Odignutost od tla	550 mm	
Dizalica	Tip	Loglift Typ F 71 FT 100
	Doseg	10 m
	Podizni moment	99 kN
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	11450 kg
Ostalo		
Cijena	232000€	

STEFAN Mini

SMB-Sondermaschinenbau Sonneberg e. K.
Friedrich-Engels-Straße 115
D-96515 Sonneberg
Njemačka
Tel.: 0049(0)3675/702566
Fax: 0049(0)3675/743208



TEHNIČKI DETALJI

Broj kotača	8	
Motor	IVECO Typ 7450 Si10, watercooled 4-cylinder-Dieselmotor	
Snaga	86 kW	
Transmisija	Hydrst.-mechan. 3-gear drive and electr.-hydr. differential lock 100%	
Osovina	STEFAN-bogie axle with gear wheel	
Upravljanje	Hydr. articulated frame steering	
Kočnice	service brake: 4 x negative brake. 8 x positive brake	
Hidraulični sistem	Multi-hydraulic system for drive and crane	
Kapacitet pumpe	130 l/min	
Radni tlak		
Hidraulični spremnik	250 Litara	
Spremnik za gorivo	110 Litara	
Gume	600/50 x 22.5	
Nosivost	10000 kg	
Duljina	8200 mm	
Širina	2500 mm	
Visina	3450 mm	
Radijus okretanja	11,8 m	
Odignutost od tla	550 mm	
Dizalica	Tip	Loglift Typ F 61
	Doseg	8,4 m
	Podizni moment	
	Okretni moment	
Masa	Prednja osovina	
	Stražnja osovina	
	Net masa	11200 kg
Ostalo		
Cijena	222000€	

KATALOG ŠUMSKIH ŽIČARA



1. ADLER	1
2. BAUMFALKE	4
3. KMS	5
4. KOLLER	6
5. LARIX	14
6. MOUNTY	15
7. SYNCROFALKE	18
8. TST	22
9. VALENTINI	26
10. WANDERFALKE	29
11. ZÖGGERLE	31

ADLER DSK 25

ADLER Konrad GmbH & Co.KG.
 Seilwinden- und Fahrzeugbau
 Gewerbegebiet Grimenstein 7
 D-88364 Wolfegg
 Njemačka
 Tel.: 0049(0)7527/96080
 Internet: www.konrad-adler.de



TEHNIČKI DETALJI

Tip	2-Drum mobile tower yarder for three-point attachment on tractors. Hydrst. winch drive via power take off. Radio remote control with automatic distance control
Max. duljina trase	280 m
Motor	Taractor engine from 55 kW
Snaga	55 kW
Okretaji u min	
Transmisija	Hydrst. Winch drive
Mjenjač	Gear and planetary drive
Kočnice	Band brake for winches
Uređaj za upravljanje	Radio remote control with automatic distance control
Visina stupa	8 m
Vitlo nosivog užeta	280m/14 mm cable diameter
Vitlo vučnog užeta	300m/8.5 mm cable diameter
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	
Sidereno vitlo	2 x 50 m/14 mm cable diameter
Kolica	SHERPA 1,5 t
Nosivost	1500 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	5000 mm
Širina	2000 mm
Visina	3400 mm
Masa bez užadi	1200 kg
Masa kolica	130 kg
Svrha	Uphill
Ostalo	
Cijena	85000 €

ADLER MS 500 UNI

ADLER Konrad GmbH & Co.KG.
 Seilwinden- und Fahrzeugbau
 Gewerbegebiet Grimenstein 7
 D-88364 Wolfegg
 Njemačka
 Tel.: 0049(0)7527/96080
 Internet: www.konrad-adler.de



TEHNIČKI DETALJI

Tip	Mountable mobile tower yarder with own engine. Hydrst. winch drive. Radio remote control with automatic distance control
Max. duljina trase	570 m
Motor	IVECO, watercooled 4-cylinder-Diesel engine
Snaga	59 kW
Okretaji u min	
Transmisija	Hydrst. Winch drive
Mjenjač	Gear and planetary drive
Kočnice	Band brake for winches
Uređaj za upravljanje	Radio remote control with automatic distance control
Visina stupa	9,1 m
Vitlo nosivog užeta	570m/17,5 mm cable diameter
Vitlo vučnog užeta	1000m/11 mm cable diameter
Vitlo povratnog užeta	1000M/8 mm cable diameter
Vitlo pomoćnog užeta	
Sidereno vitlo	4 x 50 m/14 mm cable diameter
Kolica	SHERPA U III
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	5500 mm
Širina	2300 mm
Visina	3200 mm
Masa bez užadi	5000 kg
Masa kolica	300 kg
Svrha	Down and uphill as well as level Terrain
Ostalo	
Cijena	150000 €

ADLER MS 650 UNI


ADLER Konrad GmbH & Co.KG.
 Seilwinden- und Fahrzeugbau
 Gewerbegebiet Grimmenstein 7
 D-88364 Wolfegg
 Njemačka
 Tel.: 0049(0)7527/96080
 Internet: www.konrad-adler.de



TEHNIČKI DETALJI	
Tip	Mountable mobile tower yarder with own engine. Hydrst. winch drive. Radio remote control with automatic distance control
Max. duljina trase	650 m
Motor	IVECO, watercooled 4-cylinder-Diesel engine
Snaga	78 kW
Okretaji u min	
Transmisija	Hydrst. Winch drive
Mjenjač	Gear and planetary drive
Kočnice	Band brake for winches
Uređaj za upravljanje	Radio remote control with automatic distance control
Visina stupa	9,1 m
Vitlo nosivog užeta	650m/18 mm cable diameter
Vitlo vučnog užeta	1300m/11 mm cable diameter
Vitlo povratnog užeta	1300M/8 mm cable diameter
Vitlo pomoćnog užeta	
Sidereno vitlo	4 x 50 m/14 mm cable diameter
Kolica	SHERPA U III
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	6000 mm
Širina	2250 mm
Visina	3200 mm
Masa bez užadi	5800 kg
Masa kolica	300 kg
Svrha	Down and uphill as well as level Terrain
Ostalo	
Cijena	175000 €

BAUMFALKE 2,5 t

MM Forsttechnik GmbH
 Mayr-Melnhof-Straße 9
 A-8130 Frohnleiten
 Austrija
 Tel.: +43(0)3126/5099-0
 Telefax: +43(0)3126/5099-4068
 E-mail: office@mm-forsttechnik.at
 Internet: www.mm-forsttechnik.at

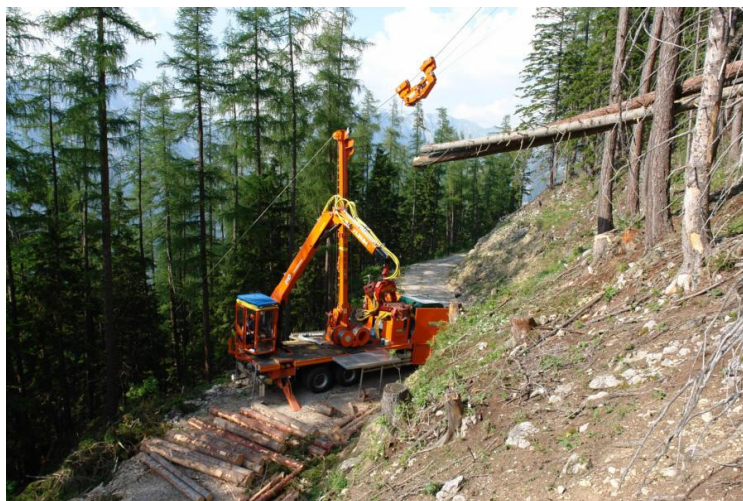

TEHNIČKI DETALJI	
Tip	Mast yarder on a tandem axle trailer with crane incl. Processor
Max. duljina trase	700 m
Motor	Hydraulic motor 50kW
Snaga	110 kW
Okretaji u min	
Transmisija	cable 1: hydraulic motor 50kW max. Tractive force 26 kN cable 2: Hydraulic motor 35 kW, max. tractive force 17kN
Mjenjač	
Kočnice	Disc Brake
Uređaj za upravljanje	electronic control SYNCHRO TRONIC with Target and supports automatic
Visina stupa	10,5 m
Vitlo nosivog užeta	9 mm/1,300 m
Vitlo vučnog užeta	9 mm/1,300 m
Vitlo povratnog užeta	6 mm/ 1,300 m
Vitlo pomoćnog užeta	
Sidereno vitlo	
Kolica	Carriage MM Sherpa U 3 t
Nosivost	3000 kg
Upravljanje kolicima	
Valjci	
Duljina	
Širina	
Visina	
Masa bez užadi	
Masa kolica	
Svrha	
Ostalo	Processor head: KETO 51 D, Control EPEC 4W 30, Eco Supreme – Tilt
Cijena	

KMS 12 Kippmastseilgerät

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Austrija
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI	
Tip	Mobile tower yarder with hydrost. 3-winch System. 4 hydr. guy-line winches with separated engine
Max. duljina trase	800 m
Motor	IVECO, watercooled 6-cylinder-Diesel engine
Snaga	169 kW
Okretaji u min	
Transmisija	Hydr. drive for skyline winch, tow rope and auxiliary cable winch
Mjenjač	
Kočnice	Hydr. multi-disc brake
Uređaj za upravljanje	Radio remote control with automatic distance
Visina stupa	10 m
Vitlo nosivog užeta	800m/22 mm cable diameter
Vitlo vučnog užeta	850m/12 mm cable diameter
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	Assembly cable winch 1200 m/7mm
Sidereno vitlo	4 x 60 m/22 mm cable diameter
Kolica	LIFTLINER 4000
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	5060 mm
Širina	2090 mm
Visina	3210 mm
Masa bez užadi	8000 kg
Masa kolica	850 kg
Svrha	Up – and downhill
Ostalo	
Cijena	175000 €

KOLLER K 301 - Traktoranagerät

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Austrija
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI

Tip	Tractor / 3-point mounted yarder for uphill logging
Max. duljina trase	500 m
Motor	Tractor engine min. 60 kW
Snaga	60 kW
Okretaji u min	
Transmisija	Trnsmission from tractor power take off via cardan shaft to winch. Line pull: Skyline 50 kN (tension section) Mainline 26 kN (average drum)
Mjenjač	Worm wheel gear box
Kočnice	Skyline: manually actuated band brake Mainline: hydraulically actuated band brake
Uređaj za upravljanje	Hydromechanical single lever operation with dead-man's contro
Visina stupa	8,8 m
Vitlo nosivog užeta	400m/18mm cable Diameter, swaged or: 500m/16mm cable Diameter, swaged
Vitlo vučnog užeta	450m/10mm cable Diameter, swaged or: 550m/9mm cable Diameter, swaged
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	
Sidereno vitlo	4 x 50 m/16 mm cable diameter
Kolica	KOLLER SKA 1 or SKA1-Z
Nosivost	1500 kg
Upravljanje kolicima	KOLLER-MULTI-MATIK, Radio remote control
Valjci	2
Duljina	5500 mm
Širina	2000 mm
Visina	3200 mm
Masa bez užadi	2900 kg
Masa kolica	150 kg
Svrha	Uphill logging
Ostalo	Pole extention 10 m
Cijena	

KOLLER K 507 - LKW

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Austrija
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI

Tip	Truck mounted yarder - for uphill and downhill logging
Max. duljina trase	1000 m
Motor	MAN-LKW-Motor, NMV-PTO and pump-transfer box gearing . EURO 4
Snaga	228 kW
Okretaji u min	
Transmisija	Winch 1: hydr. wheel hub motor Winch 2: hydr. wheel hub motor Line pull: Skyline 120 kN (tension section) Winch 43 kN (average drum)
Mjenjač	
Kočnice	Skyline: hydraulically actuated spring-applied multi-disk brake; Winch 1+2: hydraulically actuated spring-applied multi-disk brake
Uređaj za upravljanje	KOLLER MULTI MATIK and operator cabin; Radio control for auxiliary functions
Visina stupa	13,5 m
Vitlo nosivog užeta	1000 m Ø 20 mm swaged or 800m/22mm
Vitlo vučnog užeta	Winch 1: 1400m/11mm cable Diameter, swaged
Vitlo povratnog užeta	Winch 2: 1400m/11mm cable Diameter, swaged
Vitlo pomoćnog užeta	1600m/6mm cable Diameter
Sidereno vitlo	4 x 50m/20 mm cable Diameter with separated hydr. power transmission
Kolica	MSK 3 or USKA 2,5 Z
Nosivost	3000 kg
Upravljanje kolicima	KOLLER-MULTI-MATIK, Radio remote control
Valjci	4
Duljina	11250 mm
Širina	2450 mm
Visina	3950 mm
Masa bez užadi	26000 kg
Masa kolica	680 kg
Svrha	All terrain system
Ostalo	
Cijena	

KOLLER K 507H-e

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Austrija
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI

Tip	tower yarder on trailer with tandem axle
Max. duljina trase	1000 m
Motor	3-cylinder Deutz diesel
Snaga	228 kW
Okretaji u min	
Transmisija	
Mjenjač	
Kočnice	
Uređaj za upravljanje	KollerMultiMatik;electric winch control with automatic target, stretching automatic and remote control
Visina stupa	11 m
Vitlo nosivog užeta	Cable Capacity: 1000m bei 18 mm Ø
Vitlo vučnog užeta	Cable Capacity:2000m bei 10mm Ø
Vitlo povratnog užeta	Cable Capacity:2000m bei 10mm Ø
Vitlo pomoćnog užeta	
Sidereno vitlo	
Kolica	Type Koller MSK 4, Rope is flushed out over engine
Nosivost	780 kg
Upravljanje kolicima	
Valjci	
Duljina	
Širina	
Visina	
Masa bez užadi	
Masa kolica	
Svrha	
Ostalo	
Cijena	350000 €

KOLLER K 602 - LKW

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Austrija
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI

Tip	2-drum mobile tower yarder mounted on a 3-axis lorry
Max. duljina trase	700 m
Motor	CUMMINS ISBe-Motor
Snaga	136 kW
Okretaji u min	
Transmisija	Skyline (115 kN)- and tow rope (62 kN) winch powered by powershift transmission and bevel helical gearbox
Mjenjač	Bevel helical gearbox
Kočnice	Skyline: 2 hydraulically actuated spring-applied disk brakes Mainline: pneumatically actuated spring-applied band brake
Uređaj za upravljanje	Manual version: manual control by operator; Automated version: KOLLER MULTI MATIK and operator; Radio control for auxiliary functions
Visina stupa	10 m
Vitlo nosivog užeta	700m/20mm cable Diameter, swaged or: 600m/22mm cable Diameter, swaged
Vitlo vučnog užeta	700m/12mm cable Diameter, swaged
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1200m/6mm cable Diameter
Sidereno vitlo	4 x 50m/20 mm cable Diameter with separated hydr. power transmission
Kolica	Type MSK 3, MSK-10 or SKA 2,5 Z
Nosivost	3000 kg
Upravljanje kolicima	KOLLER-MULTI-MATIK, Radio remote control
Valjci	4
Duljina	10500 mm
Širina	2500 mm
Visina	3500 mm
Masa bez užadi	20000 kg
Masa kolica	680 kg
Svrha	For uphill logging
Ostalo	Pole extention 2m – 3,5 m
Cijena	

KOLLER K 306 - Anhänger mit PENZ-Kran

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Österreich
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI

Tip	Trailer mounted yarder – for uphill and downhill logging with PENZ-Crane 10.81 H and pneumatic Brakes
Max. duljina trase	800 m
Motor	Deutz 6-cylinder watercooled diesel engine
Snaga	147 kW
Okretaji u min	
Transmisija	Line pull: Skyline 65 kN; Mainline 25 kN Haulbackline 22 kN
Mjenjač	Worm wheel gear box
Kočnice	Skyline: hydraulically actuated spring-applied disk brake; Mainline: hydr. actuated spring-applied band brake; Haulbackline: hydraulically actuated spring-applied multi-disk brake Straw line: hydraulically actuated spring-applied multi-disk brake
Uređaj za upravljanje	KOLLER-MULTI-MATIK with display, Radio remote control and track-automatic
Visina stupa	9,5 m
Vitlo nosivog užeta	660m/18mm cable Diameter, swaged or: 840m/16mm cable Diameter, swaged
Vitlo vučnog užeta	720m/10mm cable Diameter, swaged or: 890m/9mm cable Diameter, swaged
Vitlo povratnog užeta	1500 m/10 mm cable diameter
Vitlo pomoćnog užeta	1200 m/6 mm cable diameter
Sidereno vitlo	4 x 50 m/16 mm cable diameter with separated hydr. power transmission
Kolica	KOLLER SKA 1 or USKA 1,5
Nosivost	1500 kg
Upravljanje kolicima	KOLLER MULTI MATIK, radio remote control
Valjci	2
Duljina	10300 mm
Širina	2500 mm
Visina	3900 mm
Masa bez užadi	14000 kg
Masa kolica	2885 kg
Svrha	All terrain system
Ostalo	
Cijena	

KOLLER K 307 Gebirgscharvester

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Österreich
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI	
Tip	Trailer mounted yarder – for uphill and downhill logging with PENZ-Crane 10.81 H and pneumatic Brakes
Max. duljina trase	800 m
Motor	MAN Turbodiesel, 316 kW/440 PS Euro 6
Snaga	kW
Okretaji u min	
Transmisija	Line pull: Skyline 65 kN; Mainline 25 kN Haulbackline 22 kN
Mjenjač	Worm wheel gear box
Kočnice	Skyline: hydraulically actuated spring-applied disk brake; Mainline: hydr. actuated spring-applied band brake; Haulbackline: hydraulically actuated spring-applied multi-disk brake Straw line: hydraulically actuated spring-applied multi-disk brake
Uređaj za upravljanje	KOLLER-MULTI-MATIK with display, Radio remote control and track-automatic
Visina stupa	9,5 m
Vitlo nosivog užeta	660m/18mm cable Diameter, swaged or: 840m/16mm cable Diameter, swaged
Vitlo vučnog užeta	720m/10mm cable Diameter, swaged or: 890m/9mm cable Diameter, swaged
Vitlo povratnog užeta	1500 m/10 mm cable diameter
Vitlo pomoćnog užeta	1200 m/6 mm cable diameter
Sidereno vitlo	4 x 50 m/16 mm cable diameter with separated hydr. power transmission
Kolica	KOLLER SKA 1 or USKA 1,5
Nosivost	1500 kg
Upravljanje kolicima	KOLLER MULTI MATIK, radio remote control
Valjci	2
Duljina	10300 mm
Širina	2500 mm
Visina	3900 mm
Masa bez užadi	14000 kg
Masa kolica	2885 kg
Svrha	All terrain system
Ostalo	
Cijena	

KOLLER K 507 Gebirgsharvester

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Österreich
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI

Tip	Truck mounted yarder - for uphill and downhill logging, with crane and processor head
Max. duljina trase	1000 m
Motor	Truck diesel engine with (316 kW) Utilization of the direct auxiliary drive
Snaga	316 kW
Okretaji u min	
Transmisija	Line pull: Skyline 65 kN; Mainline 25 kN Haulbackline 22 kN
Mjenjač	
Kočnice	Skyline: hydraulically actuated spring-applied multi-disk brake; Winch 1+2: hydraulically actuated spring-applied multi-disk brake Straw line: pneumatically actuated spring-applied drum brake
Uređaj za upravljanje	KOLLER-MULTI-MATIK with display, Radio remote control and track-automatic
Visina stupa	11,5 m
Vitlo nosivog užeta	1000m/20mm cable Diameter, swaged or: 840m/22mm cable Diameter, swaged
Vitlo vučnog užeta	Winch 1: 1400m/11mm cable Diameter, swaged
Vitlo povratnog užeta	Winch 2: 1400m/11mm cable Diameter, swaged
Vitlo pomoćnog užeta	1600 m/6 mm cable diameter
Sidereno vitlo	4 x 50 m/20 mm cable diameter with separated hydr. power transmission
Kolica	KOLLER SKA 1 or USKA 2,5 Z
Nosivost	3000 kg
Upravljanje kolicima	KOLLER MULTI MATIK, radio remote control
Valjci	4
Duljina	12640 mm
Širina	2450 mm
Visina	3950 mm
Masa bez užadi	35000 kg
Masa kolica	680 kg
Svrha	All terrain system
Ostalo	
Cijena	

KOLLER K 602 Gebirgscharvester

KOLLER Forsttechnik GmbH.
Kufsteiner Wald 26
A-6334 Schwoich/Kufstein
Österreich
Tel.: 0043(0)5372/63257
Fax: 0043(0)5372/63257-7
E-mail: office@kollergmbh.com
Internet: www.kollergmbh.com



TEHNIČKI DETALJI	
Tip	3-axis truck mounted yarder - for uphill logging, with crane and processor head (WOODY 60)
Max. duljina trase	700 m
Motor	Utilization of the direct auxiliary drive
Snaga	316 kW
Okretaji u min	
Transmisija	Line pull: Skyline 95 kN; Mainline 50 kN
Mjenjač	Bevel helical gearbox
Kočnice	Skyline: 2 hydraulically actuated spring-applied disk brakes Mainline: pneumatically actuated spring-applied band brake Straw line: hydraulically actuated spring-applied multi-disk brake
Uređaj za upravljanje	KOLLER-MULTI-MATIK with display, Radio remote control and track-automatic
Visina stupa	10 m
Vitlo nosivog užeta	700m/22mm cable Diameter, swaged or: 600m/12mm cable Diameter, swaged
Vitlo vučnog užeta	700m Ø12mm swaged
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1200 m/6 mm cable diameter
Sidereno vitlo	4 x 50 m/20 mm cable diameter with separated hydr. power transmission
Kolica	MSK 3 , MSK-10 or SKA 2,5 Z
Nosivost	3000 kg
Upravljanje kolicima	KOLLER MULTI MATIK and operator cabin Radio control for auxiliary functions
Valjci	4
Duljina	11500 mm
Širina	2500 mm
Visina	4000 mm
Masa bez užadi	31000 kg
Masa kolica	680 kg
Svrha	Uphill
Ostalo	Pole extension 2 – 3,5 m
Cijena	

LARIX H4-800

ŠLP Křtiny
679 05 Křtiny 175
Češka
tel.: +420 516 428 811
+420 516 439 101
e-mail: slp@slpkrtiny.cz



TEHNIČKI DETALJI	
Tip	Trailer with its own engine or truck
Max. duljina trase	
Motor	
Snaga	155 kW
Okretaji u min	
Transmisija	
Mjenjač	
Kočnice	
Uređaj za upravljanje	
Visina stupa	11 m
Vitlo nosivog užeta	Traction: supporting cable drum 123 kN; Drum capacity: 850 m at 20 mm
Vitlo vučnog užeta	Tensile force: 40 kN train cable drum; Drum capacity: 1700 m at 12mm
Vitlo povratnog užeta	Traction: Rear cable drum 28 kN; Drum capacity: 1700 m at 10 mm
Vitlo pomoćnog užeta	Tensile force: 10 kN assembly drum Drum capacity: 1700 m at 10 mm polypropylene
Sidereno vitlo	
Kolica	MM Sherpa U 4t
Nosivost	
Upravljanje kolicima	
Valjci	
Duljina	
Širina	
Visina	
Masa bez užadi	15000 kg
Masa kolica	
Svrha	Uphill and downhill universal device for the operation
Ostalo	
Cijena	220392 €

MOUNTY 3000

KONRAD Forsttechnik GmbH
 Oberpreitenegg 52
 A-9451 Preitenegg
 Austrija
 Tel.: +43(0)4354/2432
 E-mail: office@forsttechnik.at
 Internet: www.forsttechnik.at



TEHNIČKI DETALJI

Tip	Combination machine with cable logging unit/crane with harvester head WOODY 50 H, mounted on 3-axis lorry
Max. duljina trase	500 m
Motor	6 cyl. Common-Rail with 10500 ccm
Snaga	325 kW
Okretaji u min	
Transmisija	LHydr. drive for skyline winch, tow rope and assembly cable winch
Mjenjač	
Kočnice	Multi-disc brake for Skyline- and tow rope drum
Uređaj za upravljanje	Radio remote control with distance automatic and carriage engine start / stop
Visina stupa	13,1 m
Vitlo nosivog užeta	500m/18mm
Vitlo vučnog užeta	550m/11mm
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1000 m/6 mm cable diameter
Sidereno vitlo	4 x 60 m / 20 mm cable diameter
Kolica	CablCar30
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	11600 mm
Širina	2450 mm
Visina	3950 mm
Masa bez užadi	26000 kg
Masa kolica	550 kg
Svrha	U and downhill
Ostalo	Circulation cable drum
Cijena	414000 €

MOUNTY 4000

KONRAD Forsttechnik GmbH
 Oberpreitenegg 52
 A-9451 Preitenegg
 Austrija
 Tel.: +43(0)4354/2432
 E-mail: office@forsttechnik.at
 Internet: www.forsttechnik.at



TEHNIČKI DETALJI	
Tip	Combination machine with cable logging unit/crane with harvester head WOODY 60 H, mounted on 3 or 4-axis lorry
Max. duljina trase	700 m
Motor	6 cyl. Common-Rail with 10500 ccm
Snaga	325 kW
Okretaji u min	
Transmisija	LHydr. drive for skyline winch, tow rope and assembly cable winch
Mjenjač	
Kočnice	Multi-disc brake for Skyline- and tow rope drum
Uređaj za upravljanje	Radio remote control with distance automatic and carriage engine start / stop
Visina stupa	13,5 m
Vitlo nosivog užeta	600m/20mm
Vitlo vučnog užeta	650m/12mm
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	Assembly cable drum:1200m/7mm cable diameter
Sidereno vitlo	1000m/6mm
Kolica	SHERPA
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	11600 mm
Širina	2450 mm
Visina	3950 mm
Masa bez užadi	28000 kg
Masa kolica	450 kg
Svrha	Uphill slide logs by means of rope, with self-propelled trolley WOODLINER 3000
Ostalo	Crculation cable drum 1200m/11mm
Cijena	446500 €

MOUNTY 5000

KONRAD Forsttechnik GmbH
 Oberpreitenegg 52
 A-9451 Preitenegg
 Austrija
 Tel.: +43(0)4354/2432
 E-mail: office@forsttechnik.at
 Internet: www.forsttechnik.at



TEHNIČKI DETALJI	
Tip	Combination machine with cable logging unit/crane with harvester head WOODY 60 H, mounted on 4-axis lorry
Max. duljina trase	800 m
Motor	6 cyl. Common-Rail with 10500 ccm
Snaga	325 kW
Okretaji u min	
Transmisija	LHydr. drive for skyline winch, tow rope and assembly cable winch
Mjenjač	
Kočnice	Multi-disc brake for Skyline- and tow rope drum
Uređaj za upravljanje	Radio remote control with distance automatic and carriage engine start / stop
Visina stupa	13,5 m
Vitlo nosivog užeta	800m/20mm
Vitlo vučnog užeta	700m/12mm
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1000m/6mm cable diameter
Sidereno vitlo	6 x 60 m/20 mm cable diameter
Kolica	Liftliner 4000
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	12000 mm
Širina	2450 mm
Visina	3950 mm
Masa bez užadi	32000 kg
Masa kolica	850 kg
Svrha	Up and downhill
Ostalo	Crculation cable drum 1400m/11mm
Cijena	497500 €

SYNCROFALKE 3 t - AM

MM Forsttechnik GmbH
Mayr-Melnhof-Straße 9
A-8130 Frohnleiten
Austrija
Tel.: +43(0)3126/5099-0
Telefax: +43(0)3126/5099-4068
E-mail: office@mm-forsttechnik.at
Internet: www.mm-forsttechnik.at



TEHNIČKI DETALJI	
Tip	Trailer – mounted 3-winch mobile tower yarder, revolv- and tiltable. Hydr. driven winches. Elec. cable remote control with automatic distance and speed control.
Max. duljina trase	800 m
Motor	IVECO 6-cylinder-Turbodiesel with charge air cooling
Snaga	129 kW
Okretaji u min	
Transmisija	Direct drive via hydr. wheel hub motor
Mjenjač	
Kočnice	Tow rope: spring-loaded multi-disc brake; Auxiliary cable: Disc brake Skyline cable: Disc brake
Uređaj za upravljanje	Elec. cable remote control with automatic distance and speed control. 1 or 2 radio remote controls
Visina stupa	10,9 m
Vitlo nosivog užeta	700 m/20 mm cable diameter
Vitlo vučnog užeta	1600 m/11mm cable diameter
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1600 m/8,5 mm cable diameter.
Sidereno vitlo	4 x 70 m/18 mm cable diameter
Kolica	MM Sherpa U 3 t
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	6650 mm
Širina	2440 mm
Visina	3300 mm
Masa bez užadi	14500 kg
Masa kolica	410 kg
Svrha	Transport of wood, trees, materials, up-, downhill or horizontal. Speed: loaded 5,7m/sec; unloaded 9,5m/sec
Ostalo	mounted on lorry. 2. Radio remote control. Hydr. drive
Cijena	258580 €

SYNCROFALKE 4 t - AM

MM Forsttechnik GmbH
 Mayr-Melnhof-Straße 9
 A-8130 Frohnleiten
 Austrija
 Tel.: +43(0)3126/5099-0
 Telefax: +43(0)3126/5099-4068
 E-mail: office@mm-forsttechnik.at
 Internet: www.mm-forsttechnik.at



TEHNIČKI DETALJI

Tip	Trailer – mounted 3-winch mobile tower yarder, revolv- and tiltable. Hydr. driven winches. Elec. cable remote control with automatic distance and speed control.
Max. duljina trase	900 m
Motor	IVECO 6-cylinder-Turbodiesel with charge air cooling
Snaga	129 kW
Okretaji u min	
Transmisija	Direct drive via hydr. wheel hub motor
Mjenjač	
Kočnice	Tow rope: spring-loaded multi-disc brake; Auxiliary cable: Disc brake Skyline cable: Disc brake
Uređaj za upravljanje	Elec. cable remote control with automatic distance and speed control. 1 or 2 radio remote controls
Visina stupa	12 m
Vitlo nosivog užeta	900 m/22 mm cable diameter
Vitlo vučnog užeta	1800 m/12mm cable diameter
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1600 m/10 mm cable diameter.
Sidereno vitlo	4 x 70 m/22 mm cable diameter
Kolica	MM Sherpa U 4 t
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	7250 mm
Širina	2440 mm
Visina	3710 mm
Masa bez užadi	16000 kg
Masa kolica	490 kg
Svrha	Transport of wood, trees, materials, up-, downhill or horizontal. Speed: loaded 5,4m/sec; unloaded 9m/sec
Ostalo	mounted on lorry. 2. Radio remote control. Hydr. drive
Cijena	346340 €

SYNCROFALKE 4 t

MM Forsttechnik GmbH
Mayr-Melnhof-Straße 9
A-8130 Frohnleiten
Austrija
Tel.: +43-(0)3126/5099-0
Telefax: +43-(0)3126/5099-4068
E-mail: office@mm-forsttechnik.at
Internet: www.mm-forsttechnik.at



TEHNIČKI DETALJI	
Tip	Lorry – mounted 3-winch mobile tower yarder, revolv- and tiltable. Hydr. driven winches.
Max. duljina trase	
Motor	MAN engine
Snaga	370 kW
Okretaji u min	
Transmisija	Direct drive via hydr. wheel hub motor
Mjenjač	
Kočnice	Tow rope: spring-loaded multi-disc brake. Auxiliary cable: Disc brake Skyline cable: Disc brake
Uređaj za upravljanje	Elec. cable remote control with automatic distance and speed control
Visina stupa	12 m
Vitlo nosivog užeta	900m/22mm
Vitlo vučnog užeta	1900m/12mm
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1900m/12mm cable diameter
Sidereno vitlo	4 x 70 m/22 mm cable diameter
Kolica	SHERPA U 4t
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	11330 mm
Širina	2550 mm
Visina	3980 mm
Masa bez užadi	25000 kg
Masa kolica	490 kg
Svrha	Transport of wood, trees, materials, up-, downhill or horizontal
Ostalo	Hydr. drive for guy-line winch, telescopic pole, synthetic material cables, IVECO engine
Cijena	578170 €

SYNCROFALKE 3 t

MM Forsttechnik GmbH
 Mayr-Melnhof-Straße 9
 A-8130 Frohnleiten
 Austrija
 Tel.: +43-(0)3126/5099-0
 Telefax: +43-(0)3126/5099-4068
 E-mail: office@mm-forsttechnik.at
 Internet: www.mm-forsttechnik.at



TEHNIČKI DETALJI	
Tip	Lorry – mounted 3-winch mobile tower yarder, revolv- and tiltable. Hydr. driven winches. Elec. radio remote control with automatic distance and speed control
Max. duljina trase	800 m
Motor	IVECO Trakker
Snaga	302 kW
Okretaji u min	
Transmisija	Direct drive via hydr. wheel hub motor
Mjenjač	
Kočnice	Tow rope: spring-loaded multi-disc brake. Auxiliary cable: Disc brake Skyline cable: Disc brake
Uređaj za upravljanje	Elec. cable remote control with automatic distance and speed control
Visina stupa	11,5 m
Vitlo nosivog užeta	700m/20mm
Vitlo vučnog užeta	1600m/11mm
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1600m/8,5mm cable diameter
Sidereno vitlo	4 x 70 m/18 mm cable diameter
Kolica	SHERPA U 3t
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	9900 mm
Širina	2550 mm
Visina	3980 mm
Masa bez užadi	29000 kg
Masa kolica	410 kg
Svrha	Transport of wood, trees, materials, up-, downhill or horizontal. Speed: loaded 5,7m/sec; unloaded 9,5m/sec
Ostalo	Synthetic material guy-line cables, lorry- MAN; Woody H 52 optional
Cijena	455115 €

TST 400 3-Seil

TST Seilgeräte TRÖSTL GmbH
 Hammerstraße 9
 A-3184 Türrnitz
 Austrija
 Tel: +43(0)2769/8664 Fax: 26
 E-mail: troestl@tst-seilkran.at
 Internet: www.tst-seilkran.at



TEHNIČKI DETALJI	
Tip	3-drum tower yarder for tractor - three-point attachment
Max. duljina trase	550 m
Motor	Tractor-engine power take off 540 rpm
Snaga	44 kW
Okretaji u min	540/min
Transmisija	Hydrostatic
Mjenjač	Planetary drive
Kočnice	Disc brake for skyline and tow rope winch
Uređaj za upravljanje	Radio remote control
Visina stupa	9,5 m
Vitlo nosivog užeta	550 m/16 mm cable diameter
Vitlo vučnog užeta	1100 m/9mm cable diameter
Vitlo povratnog užeta	1100m/7mm cable diameter
Vitlo pomoćnog užeta	.
Sidereno vitlo	4 x 45 m/16 mm cable diameter
Kolica	LW TST 2500 uphill; LW TST 2500/l
Nosivost	2000 kg
Upravljanje kolicima	Radio remote control
Valjci	
Duljina	5125 mm
Širina	2250 mm
Visina	3200 mm
Masa bez užadi	5700 kg
Masa kolica	270 kg
Svrha	Up and downhill as well as level terrain
Ostalo	
Cijena	

TST 400 3 t

TST Seilgeräte TRÖSTL GmbH
 Hammerstraße 9
 A-3184 Türrnitz
 Austrija
 Tel: +43(0)2769/8664 Fax: 26
 E-mail: troestl@tst-seilkran.at
 Internet: www.tst-seilkran.at



TEHNIČKI DETALJI	
Tip	Tower yarder TST 400 for excavator + processing head; hydrostatically driven Tower yarder mounted on a truck with excavator and processor head
Max. duljina trase	550 m
Motor	IVECO 6-cylinder-Turbodiesel with fuel injection and charge air cooling
Snaga	
Okretaji u min	
Transmisija	Hydrost. drive for Skyline- and tow rope winch
Mjenjač	Chain wheel drive
Kočnice	Disc brake for skyline- and tow rope winch
Uređaj za upravljanje	Syncotronic
Visina stupa	12 m
Vitlo nosivog užeta	550m/18mm
Vitlo vučnog užeta	1100m/10mm
Vitlo povratnog užeta	1100m/7mm
Vitlo pomoćnog užeta	
Sidereno vitlo	4 x 65 m/18 mm cable diameter
Kolica	
Nosivost	3000 kg
Upravljanje kolicima	
Valjci	
Duljina	
Širina	
Visina	
Masa bez užadi	
Masa kolica	
Svrha	
Ostalo	
Cijena	

TST 400 3 t

TST Seilgeräte TRÖSTL GmbH
 Hammerstraße 9
 A-3184 Türrnitz
 Austrija
 Tel: +43(0)2769/8664 Fax: 26
 E-mail: troestl@tst-seilkran.at
 Internet: www.tst-seilkran.at



TEHNIČKI DETALJI

Tip	3-yarder with crane and processor on 2-axle trailer, carriage TST 2500 / I.
Max. duljina trase	
Motor	
Snaga	
Okretaji u min	
Transmisija	Hydrost. Dual pump
Mjenjač	
Kočnice	
Uređaj za upravljanje	
Visina stupa	12 m
Vitlo nosivog užeta	with chip tray and storage compartment max tensile force: 90 kN Rope diameter / Capacity: 16mm / 550m
Vitlo vučnog užeta	max tensile force: 30 kN Rope diameter / Capacity: 10mm / 1100m
Vitlo povratnog užeta	max tensile force: 15 kN Cable Diameter / Capacity: 7mm / 1100m
Vitlo pomoćnog užeta	
Sidereno vitlo	Rope diameter / Capacity: 16mm / 4x65m
Kolica	TST-LW 2500/I
Nosivost	2500 kg
Upravljanje kolicima	Synchro Tronic
Valjci	
Duljina	10000 mm
Širina	
Visina	
Masa bez užadi	
Masa kolica	
Svrha	a flexible and rational yarder in the thinning and heavy timber area
Ostalo	
Cijena	

TST 800 4 t

TST Seilgeräte TRÖSTL GmbH
 Hammerstraße 9
 A-3184 Türrnitz
 Austrija
 Tel: +43(0)2769/8664 Fax: 26
 E-mail: troestl@tst-seilkran.at
 Internet: www.tst-seilkran.at



TEHNIČKI DETALJI	
Tip	The hydrostatically driven tower yarder TST 800 4t inclusive loading crane and processor
Max. duljina trase	850 m
Motor	MAN / IVECO 4-axle truck with electronic motor management and engine-dependent PTO
Snaga	
Okretaji u min	
Transmisija	Hydrost. Drive for skyline and tow rope winch
Mjenjač	
Kočnice	
Uređaj za upravljanje	Syncrotronic
Visina stupa	12 m
Vitlo nosivog užeta	850m/20mm cable diameter
Vitlo vučnog užeta	1600m/11mm cable diameter
Vitlo povratnog užeta	1600m/8mm cabler diameter
Vitlo pomoćnog užeta	
Sidereno vitlo	4 x 80m/18 mm cable diameter
Kolica	TST 3500/I
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	
Duljina	
Širina	
Visina	
Masa bez užadi	
Masa kolica	340 kg
Svrha	Harvesting machine for large dimensions timber
Ostalo	2 radio remote controls
Cijena	

VALENTINI V 400

VALENTINI SNC
Viale Degasperis 157
I-38023 Cles (Trento)
Italija
Internet: www.valentini-export.com



TEHNIČKI DETALJI	
Tip	2-Drum mobile tower yarder for three-point attachment on tractors. Hydros. drive for Skyline- and tow winch
Max. duljina trase	400 m
Motor	Tractor-engine power take off 750 rpm
Snaga	70 kW
Okretaji u min	750/min
Transmisija	Hydrostatic
Mjenjač	BREVINI – gear unit
Kočnice	Wet multi-disc brake
Uređaj za upravljanje	Radio or cable remote control with automatic distance and speed control
Visina stupa	10 m
Vitlo nosivog užeta	400 m/16 mm cable diameter
Vitlo vučnog užeta	400 m/10mm cable diameter
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1000m/5mm cable diameter
Sidereno vitlo	4 x 60 m/14 mm cable diameter
Kolica	BERGWALD 3000
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	5500 mm
Širina	2000 mm
Visina	3300 mm
Masa bez užadi	3300 kg
Masa kolica	250 kg
Svrha	Uphill. (downhill possible if machine is located uphill)
Ostalo	
Cijena	

VALENTINI V 850-4

VALENTINI SNC
Viale Degasperri 157
I-38023 Cles (Trento)
Italija
Internet: www.valentini-export.com



TEHNIČKI DETALJI	
Tip	Lorry – mounted 4-winch mobile tower yarder. Cable unit revol- and tiltable. Hydrst. driven winches. 5 hydr. driven guy-line winches
Max. duljina trase	800 m
Motor	MERCEDES 6-cylinder-Turbodiesel
Snaga	300 kW
Okretaji u min	
Transmisija	Hydrostatic
Mjenjač	BREVINI – gear unit
Kočnice	Wet multi-disc brake
Uređaj za upravljanje	Radio ror cable remote control with automatic distance and speed control
Visina stupa	12,5 m
Vitlo nosivog užeta	800 m/22 mm cable diameter
Vitlo vučnog užeta	800 m/12 mm cable diameter
Vitlo povratnog užeta	1400 m/11 mm cable diameter
Vitlo pomoćnog užeta	1000m/5mm cable diameter
Sidereno vitlo	5 x 100 m/18 mm cable diameter
Kolica	BERGWALD SMU 4000
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	11000 mm
Širina	2500 mm
Visina	3900 mm
Masa bez užadi	26000 kg
Masa kolica	650 kg
Svrha	Heavy timber winch for up and downhill
Ostalo	Telescopic pole for 12,5 – 17
Cijena	

VALENTINI V 850-4

VALENTINI SNC
Viale Degasperri 157
I-38023 Cles (Trento)
Italija
Internet: www.valentini-export.com



TEHNIČKI DETALJI	
Tip	Lorry – mounted 4-winch mobile tower yarder. Cable unit revol- and tiltable. Hydrst. driven winches. 5 hydr. driven guy-line winches
Max. duljina trase	800 m
Motor	MERCEDES 6-cylinder-Turbodiesel
Snaga	300 kW
Okretaji u min	
Transmisija	Hydrostatic
Mjenjač	BREVINI – gear unit
Kočnice	Wet multi-disc brake
Uređaj za upravljanje	Radio ror cable remote control with automatic distance and speed control
Visina stupa	12,5 m
Vitlo nosivog užeta	800 m/22 mm cable diameter
Vitlo vučnog užeta	800 m/12 mm cable diameter
Vitlo povratnog užeta	1400 m/11 mm cable diameter
Vitlo pomoćnog užeta	1000m/5mm cable diameter
Sidereno vitlo	5 x 100 m/18 mm cable diameter
Kolica	BERGWALD SMU 4000
Nosivost	4000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	11000 mm
Širina	2500 mm
Visina	3900 mm
Masa bez užadi	26000 kg
Masa kolica	650 kg
Svrha	Heavy timber winch for up and downhill
Ostalo	Telescopic pole for 12,5 – 17
Cijena	

WANDERFALKE 3 t - AM

VALENTINI SNC
Viale Degasperri 157
I-38023 Cles (Trento)
Italija
Internet: www.valentini-export.com



TEHNIČKI DETALJI	
Tip	Trailer – mounted 3-winch mobile tower yarder, revolv- and tilttable. Hydr. driven winches
Max. duljina trase	500 m
Motor	4-cylinder-Turbodiesel
Snaga	92 kW
Okretaji u min	
Transmisija	Direct drive via hydr wheel hub motor
Mjenjač	
Kočnice	Tow rope: spring-loaded multi-disc brake. Auxiliary cable: disc brake Skyline cable: Disc brake
Uređaj za upravljanje	Elec. lever control. Elec. cable remote control with automatic distance and speed control. 1 or 2 radio remote controles
Visina stupa	9 m
Vitlo nosivog užeta	500 m/18 mm cable diameter
Vitlo vučnog užeta	1200 m/10 mm cable diameter
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1200m/7 mm cable diameter
Sidereno vitlo	4 x 60 m/16 mm cable diameter
Kolica	MM SHERPA U 3t
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	6430 mm
Širina	2300 mm
Visina	3480 mm
Masa bez užadi	10000 kg
Masa kolica	410 kg
Svrha	Transport of wood, trees, materials, up-, downhill or horizontal
Ostalo	Mountable on lorry or forwarder. Cable speed 5m/sec
Cijena	186735 €

WANDERFALKE 3 t

MM Forsttechnik GmbH
 Mayr-Melnhof-Straße 9
 A-8130 Frohnleiten
 Austrija
 Tel.: +43(0)3126/5099-0
 Telefax: +43(0)3126/5099-4068
 E-mail: office@mm-forsttechnik.at
 Internet: www.mm-forsttechnik.at



TEHNIČKI DETALJI	
Tip	Lorry – mounted 3-winch mobile tower yarder Cable unit revolv- and tilttable
Max. duljina trase	700 m
Motor	Lorry – IVECO Trakker
Snaga	302 kW
Okretaji u min	
Transmisija	Direct drive via hydr. wheel hub motor
Mjenjač	
Kočnice	Tow rope: spring-loaded multi-disc brake. Auxiliary cable: drum brake Skyline cable: Disc brake
Uređaj za upravljanje	Elec. lever control. Elec. cable remote control with automatic distance and speed control. Radio remote control
Visina stupa	10,5 m
Vitlo nosivog užeta	700m/18mm cable diameter
Vitlo vučnog užeta	1400m/11mm cable diameter
Vitlo povratnog užeta	
Vitlo pomoćnog užeta	1400m/7mm cable diameter
Sidereno vitlo	4 x 70m/18 mm cable diameter
Kolica	MM SHERPA U 3 t
Nosivost	3000 kg
Upravljanje kolicima	Radio remote control
Valjci	4
Duljina	9400 mm
Širina	2550 mm
Visina	3950 mm
Masa bez užadi	29000 kg
Masa kolica	410 kg
Svrha	Transport of wood, trees, materials, up-, downhill or horizontal.
Ostalo	Loaded: 8 m/sec Unloaded: 10 m/sec
Cijena	406320 €

ZÖGGERLE 3-Seil-Yarder

Zöggeler
Baumaschinen und Nutzfahrzeuge KG
A-5771 Leogang, Hirnreit 115
Tel. +43(0)6583/20230,
Mobil: +43(0)664/4323182
e-mail: zoeggeler@aon.at
Internet: www.zoeggeler.at



TEHNIČKI DETALJI	
Tip	3 Rope yarder system with special carriage
Max. duljina trase	250 m
Motor	ATLAS M1905
Snaga	125 kW
Okretaji u min	
Transmisija	
Mjenjač	
Kočnice	
Uređaj za upravljanje	
Visina stupa	
Vitlo nosivog užeta	
Vitlo vučnog užeta	250m/11mm cable diameter
Vitlo povratnog užeta	500m/11mm cable diameter
Vitlo pomoćnog užeta	500m/6mm cable diameter
Sidereno vitlo	
Kolica	
Nosivost	
Upravljanje kolicima	
Valjci	
Duljina	
Širina	
Visina	
Masa bez užadi	25000 kg
Masa kolica	
Svrha	The combined machine is ideally suited for smaller shocks or difficult terrain (no anchoring needed!)
Ostalo	Processor head ZBH 58
Cijena	



1. BANDIT	1
2. CBI	9
3. DURATECH	12
4. JENZ	14
5. PETERSON	34
6. VERMEER	38

BANDIT GY 1000

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet: <http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	2800	kg
Snaga motora	75	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	30	cm
Najveći promjer – tvrdo drvo	30	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	44	cm
Visina ulaza	38	cm
Broj noževa	2	
Dimenzije		
Duljina	3800	mm
Širina	1600	mm
Visina	2700	mm
Cijena	-	€
Namjena	Vučeni s motorom	

BANDIT GY 1500

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet: <http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	4200	kg
Snaga motora	180	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	45	cm
Najveći promjer – tvrdo drvo	45	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	50	cm
Visina ulaza	50	cm
Broj noževa	2	
Dimenzije		
Duljina	4500	mm
Širina	2100	mm
Visina	3000	mm
Cijena	-	€
Namjena	Vučeni s motorom	

BANDIT 65XP

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet:
<http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	1100	kg
Snaga motora	27	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	15	cm
Najveći promjer – tvrdo drvo	15	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	30	cm
Visina ulaza	15	cm
Promjer rotora	66	cm
Dimenzije		
Duljina	3700	mm
Širina	1600	mm
Visina	-	mm
Cijena	-	€
Namjena	Vučeni s motorom	

BANDIT 90XP

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet: <http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	1950	kg
Snaga motora	38	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	23	cm
Najveći promjer – tvrdo drvo	23	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	24	cm
Visina ulaza	43	cm
Promjer rotora	77	cm
Dimenzije		
Duljina	4100	mm
Širina	1780	mm
Visina	-	mm
Cijena	-	€
Namjena	Vučeni s motorom	

BANDIT 990XP

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet: <http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	3100	kg
Snaga motora	50	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	33	cm
Najveći promjer – tvrdo drvo	33	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	43	cm
Visina ulaza	33	cm
Promjer rotora	60	cm
Dimenzije		
Duljina	4100	mm
Širina	1750	mm
Visina	-	mm
Cijena	-	€
Namjena	Vučeni s motorom	

BANDIT 915XP

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet: <http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	3400	kg
Snaga motora	90	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	33	cm
Najveći promjer – tvrdo drvo	33	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	50	cm
Visina ulaza	33	cm
Promjer rotora	60	cm
Dimenzije		
Duljina	4960	mm
Širina	1950	mm
Visina	-	mm
Cijena	-	€
Namjena	Vučeni s motorom	

BANDIT 1890XP

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet: <http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	5200	kg
Snaga motora	159	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	51	cm
Najveći promjer – tvrdo drvo	46	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	52	cm
Visina ulaza	66	cm
Promjer rotora	94	cm
Dimenzije		
Duljina	4700	mm
Širina	2350	mm
Visina	-	mm
Cijena	-	€
Namjena	Vučeni s motorom	

BANDIT 1990XP

**Henan Guoyu Machinery Co.,
Ltd.** Zhengzhou,
Henan,
China

T: +86 371 6532 6959
M: +86 137 0393 1081
E-mail: info@sinoshred.com
Internet: <http://www.sinoshred.com/wood-chipper/>



Osnovne značajke iverača		
Masa	5900	kg
Snaga motora	187	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	60	cm
Najveći promjer – tvrdo drvo	60	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	62	cm
Visina ulaza	66	cm
Promjer rotora	94	cm
Dimenzije		
Duljina	5200	mm
Širina	2420	mm
Visina	-	mm
Cijena	-	€
Namjena	Vučeni s motorom	

CBI 6400

Continental Biomass Industries, Inc.

22 Whittier Street
Newton, NH 03858

Tel: (603) 382-0556

Fax: (603) 382-0557

E-mail: NWT.InfoFWD@terex.com

Internet: <http://www.cbi-inc.com/machines-equipment/chippers/portable>



Osnovne značajke iverača		
Masa	40000	kg
Snaga motora	787	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	110	cm
Najveći promjer – tvrdo drvo	110	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	150	cm
Visina ulaza	110	cm
Promjer rotora	100	cm
Dimenzije		
Duljina	12400	mm
Širina	3000	mm
Visina	3600	mm
Cijena	-	€
Namjena	Samohodni	

CBI Chipmax 484B

**Continental Biomass Industries,
Inc.**

22 Whittier Street
Newton, NH 03858

Tel: (603) 382-0556

Fax: (603) 382-0557

E-mail: NWT.InfoFWD@terex.com

Internet: <http://www.cbi-inc.com/machines-equipment/chippers/portable>



Osnovne značajke iverača		
Masa	25000	kg
Snaga motora	570	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	100	cm
Najveći promjer – tvrdo drvo	100	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	130	cm
Visina ulaza	120	cm
Promjer rotora	100	cm
Dimenzije		
Duljina	9200	mm
Širina	2500	mm
Visina	3500	mm
Cijena	-	€
Namjena	Samohodni	

CBI Magnum Force 754

**Continental Biomass Industries,
Inc.**

22 Whittier Street
Newton, NH 03858

Tel: (603) 382-0556

Fax: (603) 382-0557

E-mail: NWT.InfoFWD@terex.com

Internet: <http://www.cbi-inc.com/machines-equipment/chippers/portable>



Osnovne značajke iverača		
Masa	43000	kg
Snaga motora	770	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	-	cm
Najveći promjer – tvrdo drvo	-	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	-	cm
Visina ulaza	-	cm
Promjer rotora	-	cm
Dimenzije		
Duljina	11810	mm
Širina	3400	mm
Visina	3570	mm
Cijena	-	€
Namjena	Samohodni	

DURATECH TC-12

DuraTech Industries International, Inc.

P.O. Box 1940
Jamestown, ND 58401

Phone: (701) 252-4601
Fax: (701) 252-0502 Tel:
E-mail: info@duratechindustries.net
Internet:
<http://www.duratechindustries.net>



Osnovne značajke iverača		
Masa	3500	kg
Snaga motora	74	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	30	cm
Najveći promjer – tvrdo drvo	30	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	51	cm
Visina ulaza	30	cm
Promjer rotora	107	cm
Dimenzije		
Duljina	5430	mm
Širina	2010	mm
Visina	2670	mm
Cijena	-	€
Namjena	Vučeni s motorom	

DURATECH TC-15

DuraTech Industries International, Inc.

P.O. Box 1940
Jamestown, ND 58401

Phone: (701) 252-4601

Fax: (701) 252-0502 Tel:

E-mail: info@duratechindustries.net

Internet: <http://www.duratechindustries.net>



Osnovne značajke iverača		
Masa	3900	kg
Snaga motora	96	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	38	cm
Najveći promjer – tvrdo drvo	38	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	58	cm
Visina ulaza	38	cm
Promjer rotora	107	cm
Dimenzije		
Duljina	5280	mm
Širina	2310	mm
Visina	-	mm
Cijena	-	€
Namjena	Vučeni s motorom	

JENZ HEM 561 DL

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet:
<http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	13000	kg
Snaga motora	360	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	42	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	65	cm
Promjer rotora	820	cm
Dimenzije		
Duljina	6925	mm
Širina	2550	mm
Visina	2670	mm
Cijena	70000	€
Namjena	Nošeni s motorom	

JENZ HEM 583 DQ Hybrid

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet:
<http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	13000	kg
Snaga motora	390	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	45	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	68	cm
Promjer rotora	820	cm
Dimenzije		
Duljina	8420	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Vučenii s motorom	

JENZ HEM 821 DQ Hybrid

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet:
<http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	21500	kg
Snaga motora	460	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	80	cm
Najveći promjer – tvrdo drvo	60	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	820	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	8700	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Vučeni s motorom	

JENZ HEM 583 DQ Truck Hybrid

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet:
<http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	30000	kg
Snaga motora	390	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	45	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	820	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	8700	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Kamionski s motorom	

JENZ HEM 821 DQ Truck Hybrid

JENZ GmbH

Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0

E-Mail: info@jenz.de

Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	33700	kg
Snaga motora	460	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	80	cm
Najveći promjer – tvrdo drvo	60	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	820	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	10130	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Kamionski s motorom	

JENZ HEM 561 R-Truck

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	22750	kg
Snaga motora	265	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	45	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	650	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	7500	mm
Širina	2550	mm
Visina	3950	mm
Cijena		€
Namjena	Samohodni na kamionu	

JENZ HEM 593 R-Truck

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet:
<http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	25800	kg
Snaga motora	368	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	45	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	140	cm
Visina ulaza	680	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	7700	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Samohodni na kamionu	

JENZ HEM 561 Z

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	9600	kg
Snaga motora	170	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	42	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	650	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	5950	mm
Širina	2550	mm
Visina	3600	mm
Cijena		€
Namjena	Vučeni, PTO pogonjen	

JENZ HEM 593 Z

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet:
<http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	13000	kg
Snaga motora	200	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	45	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	140	cm
Visina ulaza	680	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	-	mm
Širina	1580	mm
Visina	-	mm
Cijena		€
Namjena	Vučeni, PTO pogonjen	

JENZ HEM 821 Z

JENZ GmbH

Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0

E-Mail: info@jenz.de

Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	13800	kg
Snaga motora	380	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	80	cm
Najveći promjer – tvrdo drvo	60	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	82	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	6490	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Vučeni, PTO pogonjen	

JENZ HEM 700 DL-Truck

JENZ GmbH

Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0

E-Mail: info@jenz.de

Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	30650	kg
Snaga motora	460	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	70	cm
Najveći promjer – tvrdo drvo	50	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	70	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	10930	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Kamionski	

JENZ HEM 561 DQ-Truck

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet:
<http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	26000	kg
Snaga motora	360	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	42	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	65	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	8950	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Kamionski	

JENZ HEM 583 DL-Truck

JENZ GmbH
Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	30500	kg
Snaga motora	390	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	42	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	68	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	9700	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Kamionski	

JENZ HEM 540 DL

JENZ GmbH
Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	13000	kg
Snaga motora	205	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	42	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	79	cm
Visina ulaza	65	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	6350	mm
Širina	2550	mm
Visina	2400	mm
Cijena		€
Namjena	Vučeni s motorom	

JENZ HEM 561 DL

JENZ GmbH
Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	16000	kg
Snaga motora	240	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	42	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	65	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	8535	mm
Širina	2550	mm
Visina	3800	mm
Cijena		€
Namjena	Vučeni s motorom	

JENZ HEM 821 DQ

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	20500	kg
Snaga motora	460	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	80	cm
Najveći promjer – tvrdo drvo	60	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	82	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	8700	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Vučeni s motorom	

JENZ HEM 540 DL

JENZ GmbH
Maschinen- und
Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	13000	kg
Snaga motora	205	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	56	cm
Najveći promjer – tvrdo drvo	42	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	79	cm
Visina ulaza	65	cm
Promjer rotora	82	cm
Dimenzije		
Duljina	6350	mm
Širina	2550	mm
Visina	2440	mm
Cijena		€
Namjena	Samohodni s motorom	

JENZ HEM 700 DL

JENZ GmbH
Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	23500	kg
Snaga motora	460	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	70	cm
Najveći promjer – tvrdo drvo	50	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	70	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	7300	mm
Širina	2800	mm
Visina	3600	mm
Cijena		€
Namjena	Samohodni s motorom	

JENZ HEM 700 DL

JENZ GmbH
Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	18500	kg
Snaga motora	460	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	70	cm
Najveći promjer – tvrdo drvo	50	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	70	cm
Promjer rotora	104	cm
Dimenzije		
Duljina	10350	mm
Širina	2550	mm
Visina	3900	mm
Cijena		€
Namjena	Vučeni na poluprikolici	

JENZ HEM 1000 DXL

JENZ GmbH
Maschinen- und Fahrzeugbau
Wegholmer Str. 14
D-32469 Petershagen
Germany

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de
Internet: <http://www.jenz.de/en/>



Osnovne značajke iverača		
Masa	32000	kg
Snaga motora	571	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	100	cm
Najveći promjer – tvrdo drvo	70	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	120	cm
Visina ulaza	100	cm
Promjer rotora	145	cm
Dimenzije		
Duljina	11300	mm
Širina	2550	mm
Visina	4000	mm
Cijena		€
Namjena	Vučeni na poluprikolici	

PETERSON 3310B Drum Chipper

Peterson Factory

29408 Airport Rd
Eugene, OR 97402
USA

Tel: 541.689.6520

Fax: 541.689.0804

E-mail: info@petersoncorp.com

Internet:

<http://www.petersoncorp.com/products/?type=drum-chippers>



Osnovne značajke iverača		
Masa	29483	kg
Snaga motora	570	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	70	cm
Najveći promjer – tvrdo drvo	70	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	103	cm
Visina ulaza	61	cm
Promjer rotora	91	cm
Dimenzije		
Duljina	9280	mm
Širina	-	mm
Visina	3540	mm
Cijena	-	€
Namjena	Samohodni ili na poluprikolici	

PETERSON 6300B Drum Chipper

Peterson Factory

29408 Airport Rd
Eugene, OR 97402
USA

Tel: 541.689.6520

Fax: 541.689.0804

E-mail: info@petersoncorp.com

Internet:

<http://www.petersoncorp.com/products/?type=drum-chippers>



Osnovne značajke iverača		
Masa	29483	kg
Snaga motora	772	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	90	cm
Najveći promjer – tvrdo drvo	90	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	145	cm
Visina ulaza	91	cm
Promjer rotora	91	cm
Dimenzije		
Duljina	12980	mm
Širina	-	mm
Visina	3841	mm
Cijena	-	€
Namjena	Samohodni ili na poluprikolici	

PETERSON 5000H Whole Tree Chipper

Peterson Factory

29408 Airport Rd
Eugene, OR 97402
USA

Tel: 541.689.6520

Fax: 541.689.0804

E-mail: info@petersoncorp.com

Internet:

[http://www.petersoncorp.com/products/?type=dru
m-chippers](http://www.petersoncorp.com/products/?type=dru
m-chippers)



Osnovne značajke iverača		
Masa	47000	kg
Snaga motora	783	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	90	cm
Najveći promjer – tvrdo drvo	90	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	-	cm
Visina ulaza	-	cm
Promjer rotora	168	cm
Dimenzije		
Duljina	15630	mm
Širina	3540	mm
Visina	4011	mm
Cijena	-	€
Namjena	Na poluprikolici	

PETERSON 7900EL Disc Chipper

Peterson Factory

29408 Airport Rd
Eugene, OR 97402
USA

Tel: 541.689.6520

Fax: 541.689.0804

E-mail: info@petersoncorp.com

Internet:

<http://www.petersoncorp.com/products/?type=drum-chippers>



Osnovne značajke iverača		
Masa	47000	kg
Snaga motora	783	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	90	cm
Najveći promjer – tvrdo drvo	90	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	-	cm
Visina ulaza	-	cm
Promjer rotora	168	cm
Dimenzije		
Duljina	15630	mm
Širina	3540	mm
Visina	4011	mm
Cijena	-	€
Namjena	Na poluprikolici	

VERMEER AX 19 Brush Chipper

Vermeer Corporation

Internet:

<https://www.vermeer.com/NA/en/N/equipment/>



Osnovne značajke iverača		
Masa	5000	kg
Snaga motora	129	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	-	cm
Najveći promjer – tvrdo drvo	-	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	73	cm
Visina ulaza	61	cm
Promjer rotora	91,4	cm
Dimenzije		
Duljina	-	mm
Širina	2007	mm
Visina	2743	mm
Cijena	-	€
Namjena	Vučeni s motorom	

VERMEER BC900XL Brush Chipper

Vermeer Corporation

Internet:

<https://www.vermeer.com/NA/en/N/equipment/>



Osnovne značajke iverača		
Masa	1350	kg
Snaga motora	129	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	23	cm
Najveći promjer – tvrdo drvo	23	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	-	cm
Visina ulaza	-	cm
Promjer rotora	84	cm
Dimenzije		
Duljina	3566	mm
Širina	2019	mm
Visina	2578	mm
Cijena	-	€
Namjena	Vučeni s motorom	

VERMEER BC1500 Brush Chipper

Vermeer Corporation

Internet:

<https://www.vermeer.com/NA/en/N/equipment/>



Osnovne značajke iverača		
Masa	3538	kg
Snaga motora	97	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	-	cm
Najveći promjer – tvrdo drvo	-	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	50,8	cm
Visina ulaza	38,1	cm
Promjer rotora	57,2	cm
Dimenzije		
Duljina	4547	mm
Širina	2018	mm
Visina	2642	mm
Cijena	-	€
Namjena	Vučeni s motorom	

VERMEER BC2100XL Brush Chipper

Vermeer Corporation

Internet:

<https://www.vermeer.com/NA/en/N/equipment/>



Osnovne značajke iverača		
Masa	7350	kg
Snaga motora	205	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	-	cm
Najveći promjer – tvrdo drvo	-	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	100	cm
Visina ulaza	60	cm
Promjer rotora	91,4	cm
Dimenzije		
Duljina	5969	mm
Širina	2432	mm
Visina	2959	mm
Cijena	-	€
Namjena	Vučeni s motorom	

VERMEER WC2300XL Whole Tree Chipper

Vermeer Corporation

Internet:

<https://www.vermeer.com/NA/en/N/equipment/>



Osnovne značajke iverača		
Masa	14833	kg
Snaga motora	328	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	58,4	cm
Najveći promjer – tvrdo drvo	58,4	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	86,4	cm
Visina ulaza	68,6	cm
Promjer rotora	91,4	cm
Dimenzije		
Duljina	9100	mm
Širina	2489	mm
Visina	3300	mm
Cijena	-	€
Namjena	Vučeni s motorom	

VERMEER WC2500XL Whole Tree Chipper

Vermeer Corporation

Internet:

<https://www.vermeer.com/NA/en/N/equipment/>



Osnovne značajke iverača		
Masa	17240	kg
Snaga motora	447	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	63,5	cm
Najveći promjer – tvrdo drvo	63,5	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	86,4	cm
Visina ulaza	68,6	cm
Promjer rotora	91,4	cm
Dimenzije		
Duljina	9100	mm
Širina	2743	mm
Visina	3300	mm
Cijena	-	€
Namjena	Vučeni s motorom	

VERMEER WC2500TX Whole Tree Chipper

Vermeer Corporation

Internet:

<https://www.vermeer.com/NA/en/N/equipment/>



Osnovne značajke iverača		
Masa	22000	kg
Snaga motora	447	kW
Ulazne značajke drva		
Najveći promjer – meko drvo	63,5	cm
Najveći promjer – tvrdo drvo	63,5	cm
Značajke ulaznog ušća i reznog sustava		
Širina ulaza	86,4	cm
Visina ulaza	68,6	cm
Promjer rotora	91,4	cm
Dimenzije		
Duljina	8700	mm
Širina	2997	mm
Visina	3500	mm
Cijena	-	€
Namjena	Samohodni	